ROLLERI®

PROFESSIONAL
BENDING

PRESS BRAKE TOOLS

FAST CLAMPING SYSTEMS, ADAPTERS,
SERVICE/MODIFICATION,
SHEAR BLADES, ACCESSORIES

WELCOME ...

… to the new Rolleri catalogue!

Rolleri is one of the few **real manufacturers** of press brake tools – not a reseller and not a dealer. Therefore we emphasize great importance as being **producer** of press brake tools to bring you further advantages.

- no margin division
- direct access to the production
- direct communication, not only by specific and special bending tools.
- Competent and truthful statement about prices and delivery times – without tedious queries!

Convince yourself of our service and quality of tools!

THE COMPANY

Since 1987 we have been producing standard and special tooling. The family owned company (Francesco and Marco Rolleri) can nowadays be considered one of the largest press brake tooling manufacturers in Europe. We are internationally available with our branches Rolleri Brasil, Rolleri USA, Rolleri India, Rolleri Deutschland GmbH, Rolleri China, Rolleri Ukraine and Rolleri Benelux, for you to utilize our global experiance and footprints.

We offer fast and reliable service through our partners in all of Europe. In 2012, we have completely restructured our facilities internally. The focus of direct sales structures in the individual countries has greatly improved. We present to you, a new expanded portfolio, a significantly enlarged stock, new corporate design, and a completely new catalog that you now hold in your hands. Our promise to an alternative for you Worlwide.

THE TEAM

The Rolleri team is made up of all ages. We are innovative, dynamic and experienced, with consistency and harmony. Our mission is to bring you the best results in tool production. At Rolleri teamwork is the key to achieve outstanding customer service, research and development, great warehouse efficiency, and vast productivty.

The exceptional atmosphere in our facilities always has a positive impact on our products.

Rolleri Videos

Company Presentation
www.rolleritools.com/videos/company-rolleri

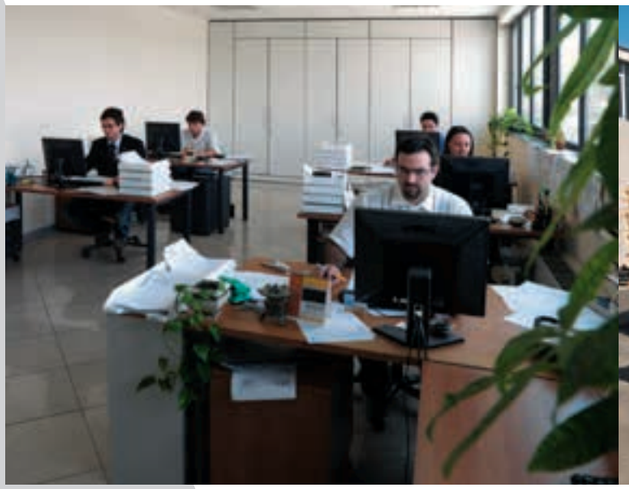

THE PRODUCTION

All production phases are certified and up to quality check standards and safety regulations. Thereby we guarantee you consistent high quality with modern CNC-machines.

All tools are laser marked with a serial number. Thus, allowing every single tool to be identified and easily tracked for reproduction.

This is what we call accurate repitition.

THE WAREHOUSE

We at Rolleri, have a wide stock ranging over more than 20,000 press brake tools. Therefore, we hold one of the largest in house stocks in all of Europe. For you this means a vast amount of tools to choose from ready to be shipped all around the world.

on stock Look for this symbol in the catalogue!

THE SERVICE

We understand that finding the right tool for the right application is of your importance. Thus, we have invested hard work into our quality service:

- Consulting,
- Technical assistance,
- Training for your bending specialists,

this is our daily business bringing you great support!

Check out our **website: www.rolleritools.com**

… also this is customer service: Rolleri provides you with immediate production after a purchase has been made to ensure the fastest delivery time!

THE CONSTRUCTION

Besides constructing many special tools, our research and development team also innovates special clamping systems which increases your productivity. Technicians and Engineers develop for you solutions which are economic and practical.

We work with highly complex 3D simulation models and are capable to create bending examples of various profiles.

Inquire with us today!

THE RAW MATERIAL

The raw material is obtained from qualified suppliers which compose the chemical formulas according to international standards. Therefore, guaranteeing high resilience and tensile strength.

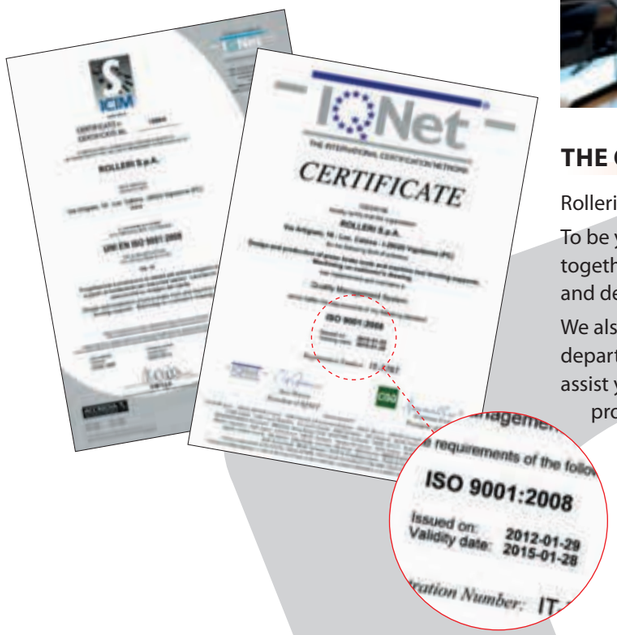

THE QUALITY

Rolleri ISO 9001:2008 certified.

To be your choice supplier means much more to us; together we can find the best and most economic tool and develop a vast number of bending solutions.

We also offer training for your employees in the bending department. These are qualities, where we are glad to assist you along with our extravagant number of bending products.

THE PRESS BRAKE TOOLS

Rolleri manufactures all tools in their own production facilities. We put great importance into our precision grinding, guaranteeing accurate reproduction of tools, exact concurrency. We induction harden all tools at 54-60 HRc to get the best results for your punches and dies. Each tool is subjected to quality control and then provided with a serial nummer to simplify and guarantee tracking.

THE QUALITY CONTROL

An extra quatlity control department reviews and tests every single tool after a complete production cycle.

Every tool is given a serial number and batch number, after being carefully examed. This process guarantees a 100% retracing possibility of the tool.

Of course Rolleri also guarantees accurate reproduction, high-quality material, induction hardening, and precision grinding.

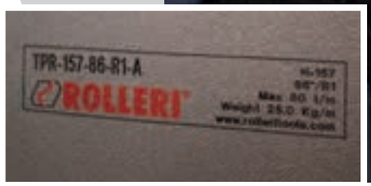

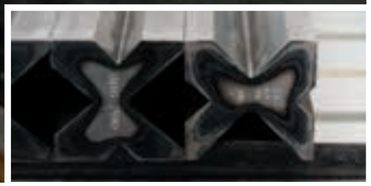

INNOVATIONS

Rolleri produces for many press brake manufacturers the clamping systems - whether they are hydraulic, pneumatic, or manual.

Our new QuickLock-System, compatible for our Rolleri Type R2 or our new ROL 100 for Rolleri Type R1, are all new developments from Rolleri which are manufactured in our production facilities.

ROLLERI®

Compatibility

Tools Rolleri Type R1

are **compatible** with press brake machines from: ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Darley, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, LFK, MVD, Newton, Prima Power, Promecam, Rico, Safan, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei, Ysd, etc.

Tools Rolleri Type R2

are **compatible** with press brake machines from:
Hämmerle-Bystronic, LVD, Trumpf or on
press brakes with System NSCL
(New Standard Clamping)

Tools Rolleri Type R3

are **compatible** with press brake machines from:
- Bystronic-Beyeler RFA
- Bystronic-Beyeler RF
- Bystronic-Beyeler R
- Bystronic-Beyeler S

Tools Rolleri Type RX

are **compatible** with press brake machines from:
EHT, Weinbrenner, American, Gasparini, Ajial-Axial, Colgar, LVD, Colly, Hämmerle-Bystronic, etc.

With Adapter-Systems the tools Rolleri Type R1-RX are also applicable on all other press brake machines.

PUNCHES ROLLERI TYPE R1

DIES ROLLERI TYPE R1

PUNCHES ROLLERI TYPE R2

DIES ROLLERI TYPE R2

PUNCHES ROLLERI TYPE R3

DIES ROLLERI TYPE R3

TOOLS ROLLERI TYPE RX

ROLLERI DIES ROLLA-V

ROLLERI CLAMPING SYSTEMS

ROLLERI ADAPTERS

ROLLERI MARK FREE BENDING

ROLLERI SPECIAL AND HEAVY DUTY TOOLS

ROLLERI SERVICE / MODIFICATIONS

ROLLERI SHEAR BLADES / ACCESSORIES

ROLLERI®

TOOLS ROLLERI TYPE RX

Content Explanation	150
EHT: Explanation	151
Weinbrenner: Explanation	151
American: Explanation	152
American: Punches and Dies	152 - 155
Gasparini: Explanation	156
Gasparini: Radius Tools and Punches	156 - 158
Ajial-Axial: Explanation	159
Ajial-Axial: Punches and Adapters	159
Colgar: Explanation	160
Colgar: Punches and Radius Tools	160
LVD: Explanation	161
LVD: Punches	162
LVD: Hemming Tools	163
LVD: Dies 78°	164 - 165
LVD: Dies 30°	166
LVD: Multi-V-Dies	167
LVD: Adapters	168
Colly: Explanation	169
Colly: Punches	169 - 171
Colly: Dies	172 - 173
Hämmerle-Bystronic: Explanation	174
Hämmerle-Bystronic: Punches	174 - 179
Hämmerle-Bystronic: Punch Holders	180 - 181
Hämmerle-Bystronic: Radius Tools	182
Hämmerle-Bystronic: Die Holders	183
Hämmerle-Bystronic: Dies	184 - 187

Compatibility

Tools Rolleri Type RX are **compatible** with press brake machines from:
EHT, Weinbrenner, American, Gasparini, Ajial-Axial, Colgar, LVD, Colly, Hämmerle-Bystronic, etc.

With Adapter-Systems the tools Rolleri Type RX
are also applicable on all other press brake machines.

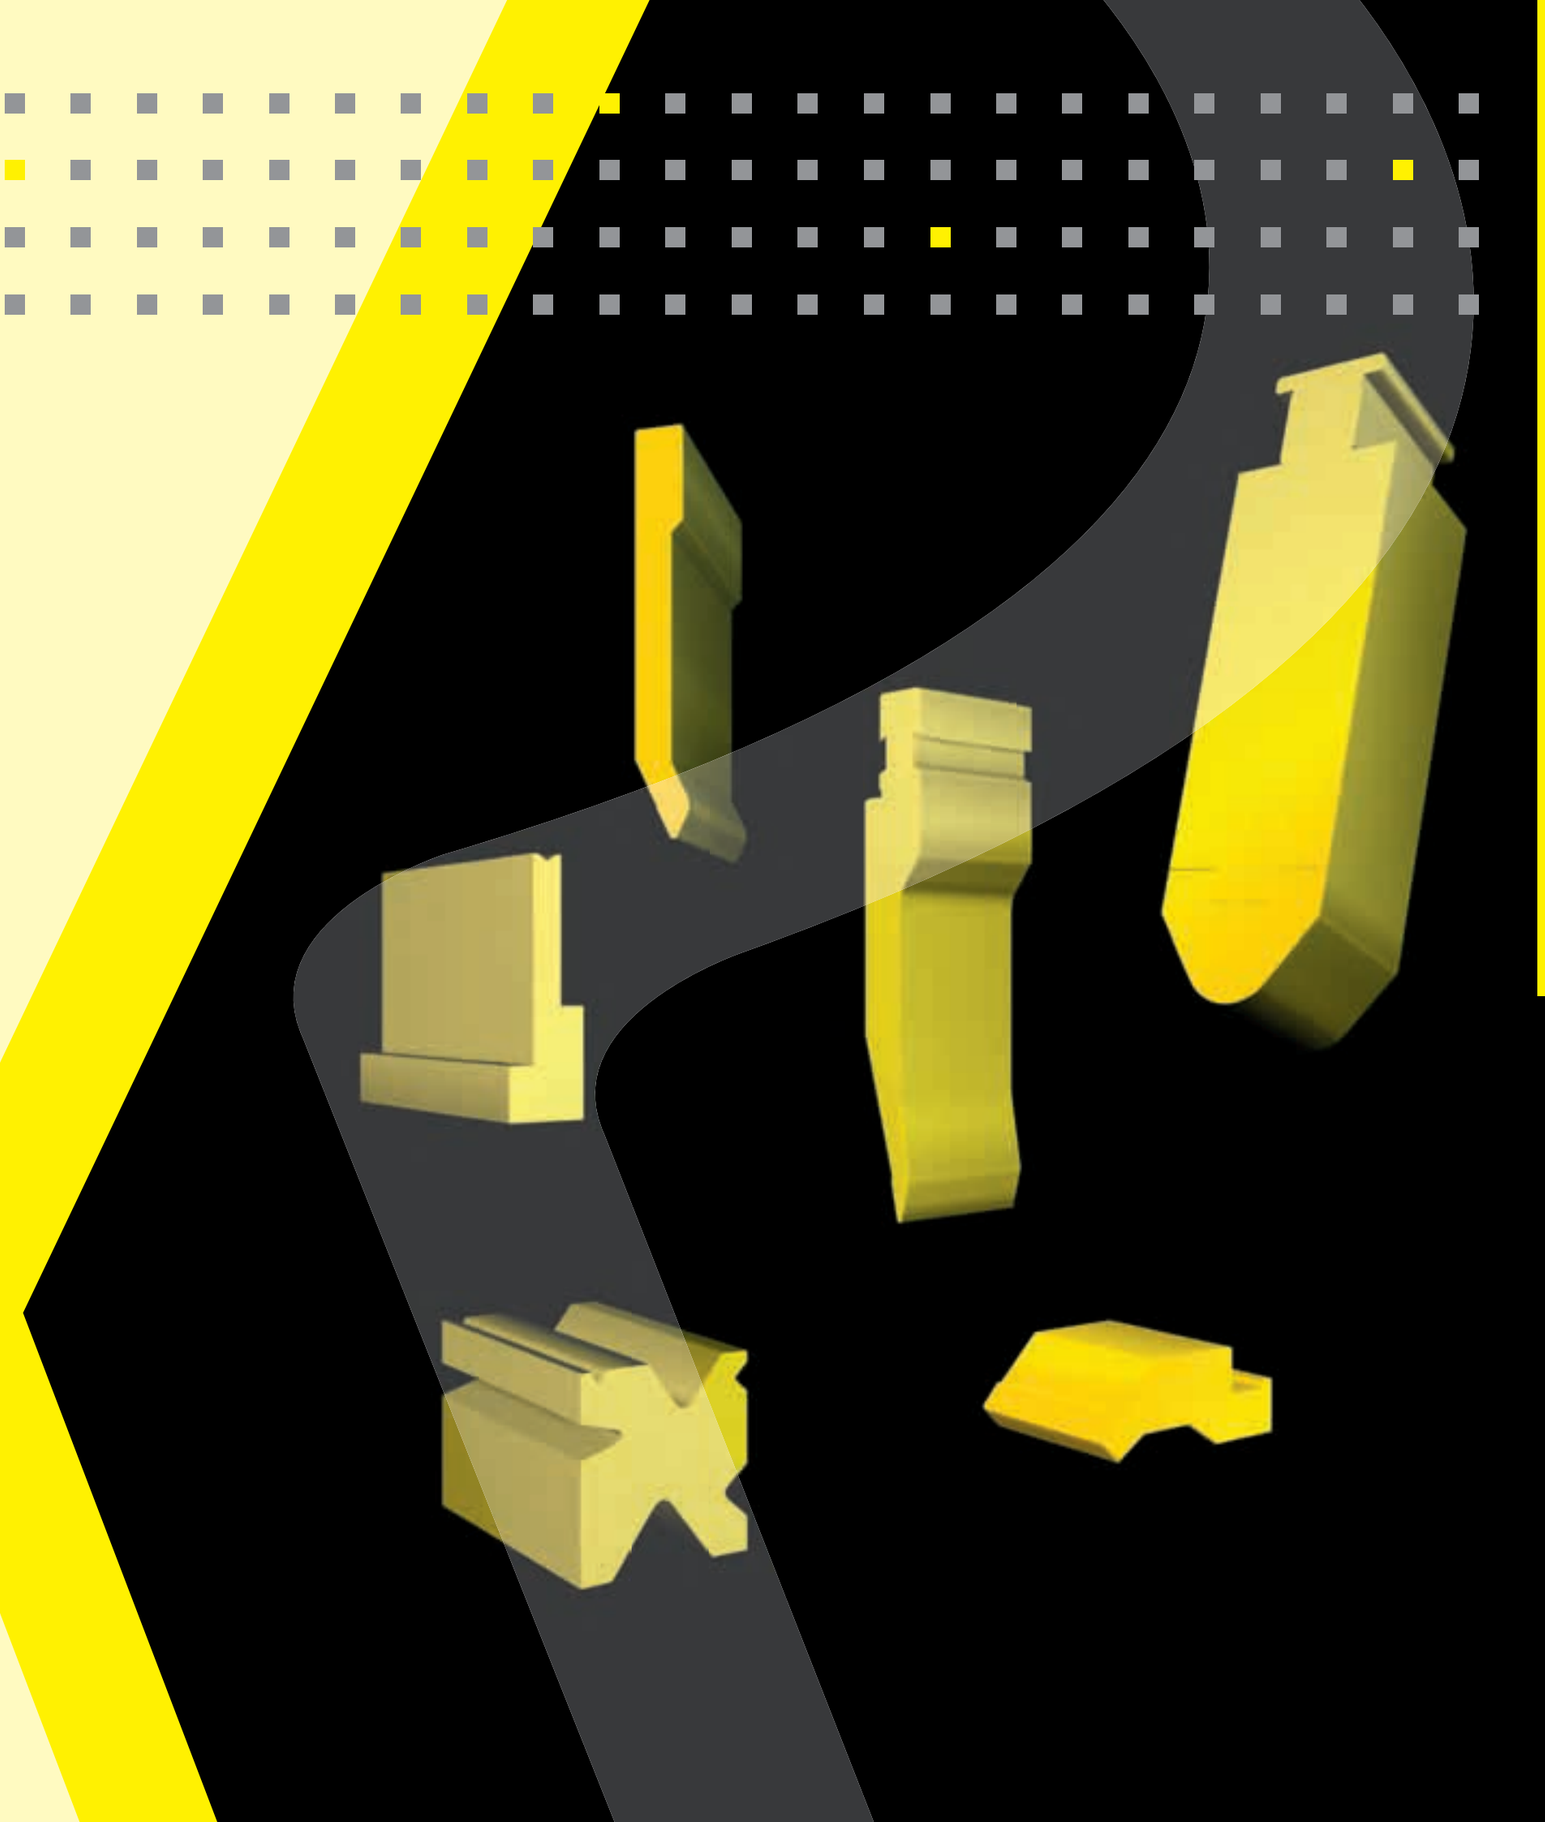

Compatibility

Tools Rolleri Type RX are:

- **compatible** with press brake machines from: EHT, Weinbrenner, American, Gasparini, Ajial-Axial, Colgar, LVD, Colly, Hämmerle-Bystronic, etc.
- **with Adapter-Systems** (see pages 210-221) also applicable on all other press brake machines.

Our Advantages – Your Convenience

- own production facilities (no reseller or dealer)
- tracking of every tool possible, with a unique **serial number** on every article after the quality control check.
- precision grinding (tolerance of +/-0.01 mm)
- guaranteed tool reproduction
- exact parallelism
- precise, consistent working height
- tang retrofitting and modification possible (see pages 248-253)
- very large stock availability

Material

The raw material is obtained from qualified suppliers which compose the chemical formulas according to international standards. Therefore, guaranteeing high resilience and tensile strength.

Material Type	Mechanical resistance of the material and the tool body	Hardness of the material and the tool body	Hardness of the operating surfaces after induction hardening
42CrMo4	900-1150 N/mm²	29.1 - 36.9 HRC	54 - 60 HRC
C45	560-710 N/mm²	12 - 15.5 HRC	54 - 60 HRC

- Specifications for the maximum press force kN/m are indicated as such, **1 t = 10 kN**.

Tang

Punches Rolleri R Type have various tangs.

Indications of precision ground areas:
▼▼▼

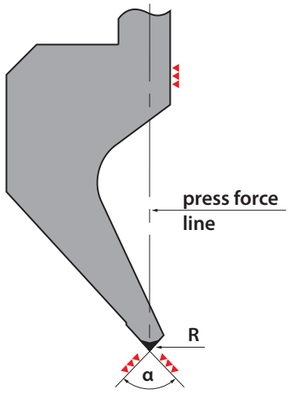



Tool lengths, sectionings and horn types

- tools Rolleri type RX are available in any length
- customized sectioning available upon your measurements
- customized horn pieces available upon request

ROLLERI® PROFESSIONAL BENDING

Explanation

We produce for you the Tools Rolleri Type RX EHT in a vast variety – custom, fast, economic and with precision.

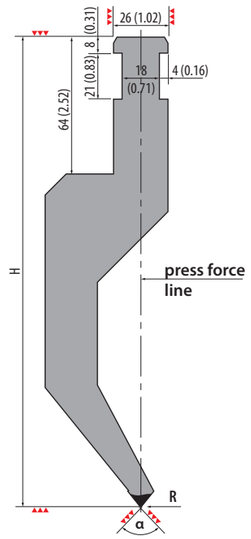

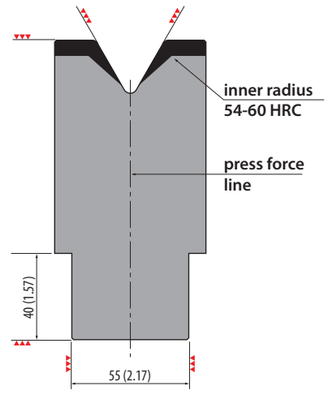

Adapters for Rolleri Type RX EHT
see pages 213-220

Explanation

We produce for you the Tools Rolleri Type RX Weinbrenner in a vast variety – custom, fast, economic and with precision.

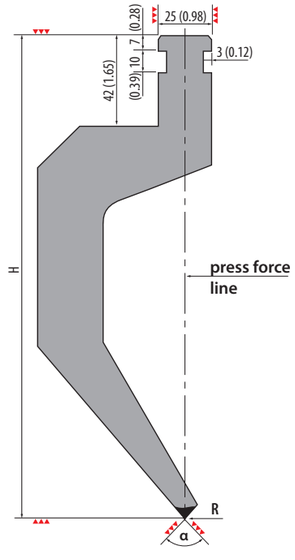

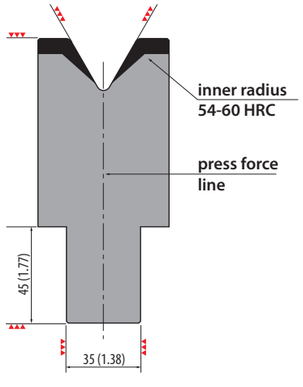

Adapters for Rolleri Type RX Weinbrenner
see pages 213-221

Tool lengths, sectionings and horn types

Punches:

- **838 mm (33 in)**
- **415 mm (16.34 in)**
- **805 mm (31.69 in) segmented**
  9 segments (100 Horn left, 100, 50, 40, 20, 15, 10, 370, 100 Horn right)

Dies:

- **838 mm (33 in)**
- **415 mm (16.34 in)**
- **805 mm (31.69 in) segmented**
  8 segments (200, 50, 40, 20, 15, 10, 370, 100)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX American

Punches American

ASP-135

900 kN/m max.

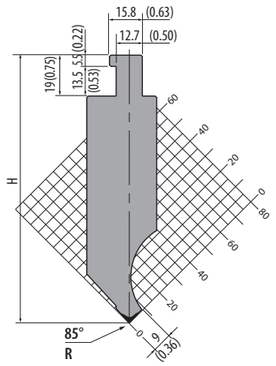

ASP-135-16	H=125 (4.92) / R=0.4 (0.016)		
	838 mm	33.00 in	21.0 kg
	415 mm	16.34 in	10.4 kg
	805 mm segmented	31.69 in segmented	20.1 kg
ASP-135-31	H=125 (4.92) / R=0.8 (0.031)		
	838 mm	33.00 in	21.0 kg
	415 mm	16.34 in	10.4 kg
	805 mm segmented	31.69 in segmented	20.1 kg
ASP-135-62	H=124.5 (4.90) / R=1.6 (0.062)		
	838 mm	33.00 in	21.0 kg
	415 mm	16.34 in	10.4 kg
	805 mm segmented	31.69 in segmented	20.1 kg
ASP-135-125	H=123.8 (4.87) / R=3.2 (0.125)		
	838 mm	33.00 in	21.0 kg
	415 mm	16.34 in	10.4 kg
	805 mm segmented	31.69 in segmented	20.1 kg

C45: 560-710 N/mm²

ASP-24

700 kN/m max.

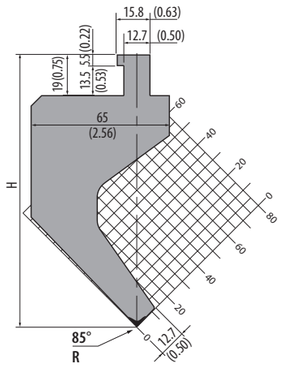

ASP-24-16	H=127 (5.00) / R=0.4 (0.016)		
	838 mm	33.00 in	31.8 kg
	415 mm	16.34 in	15.8 kg
	805 mm segmented	31.69 in segmented	30.6 kg
ASP-24-31	H=127 (5.00) / R=0.8 (0.031)		
	838 mm	33.00 in	31.8 kg
	415 mm	16.34 in	15.8 kg
	805 mm segmented	31.69 in segmented	30.6 kg
ASP-24-62	H=126.5 (4.98) / R=1.6 (0.062)		
	838 mm	33.00 in	31.8 kg
	415 mm	16.34 in	15.8 kg
	805 mm segmented	31.69 in segmented	30.6 kg
ASP-24-125	H=125.9 (4.96) / R=3.2 (0.125)		
	838 mm	33.00 in	31.8 kg
	415 mm	16.34 in	15.8 kg
	805 mm segmented	31.69 in segmented	30.6 kg

42Cr: 900-1150 N/mm²

Please find the
Punch Adapters in
the adapter chapter
on page 215

ROLLERI® PROFESSIONAL BENDING

ASP-9

660 kN/m max.



ASP-9-16	H=96 (3.78) / R=0.4 (0.016)		
	838 mm	33.00 in	12.8 kg
	415 mm	16.34 in	6.2 kg
	805 mm segmented	31.69 in segmented	12.1 kg
ASP-9-31	H=96 (3.78) / R=0.8 (0.031)		
	838 mm	33.00 in	12.8 kg
	415 mm	16.34 in	6.2 kg
	805 mm segmented	31.69 in segmented	12.1 kg
ASP-9-63	H=95.5 (3.76) / R=1.6 (0.062)		
	838 mm	33.00 in	12.8 kg
	415 mm	16.34 in	6.2 kg
	805 mm segmented	31.69 in segmented	12.1 kg
ASP-9-125	H=94.8 (3.73) / R=3.2 (0.125)		
	838 mm	33.00 in	12.8 kg
	415 mm	16.34 in	6.2 kg
	805 mm segmented	31.69 in segmented	12.1 kg

42Cr: 900-1150 N/mm²

ASP-15

1000 kN/m max.



ASP-15-16	H=95.9 (3.78) / R=0.4 (0.016)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-15-31	H=95.9 (3.78) / R=0.8 (0.031)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-15-63	H=95.9 (3.78) / R=1.6 (0.063)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-15-98	H=95.9 (3.78) / R=2.5 (0.098)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-15-125	H=96 (3.78) / R=3.2 (0.125)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg

42Cr: 900-1150 N/mm²

ASP-14

1000 kN/m max.



ASP-14-16	H=127 (5.00) / R=0.4 (0.016)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-14-31	H=127 (5.00) / R=0.8 (0.031)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-14-62	H=126.5 (4.98) / R=1.6 (0.062)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg
ASP-14-125	H=126 (4.96) / R=3.2 (0.125)		
	838 mm	33.00 in	13.4 kg
	415 mm	16.34 in	6.6 kg
	805 mm segmented	31.69 in segmented	12.9 kg

42Cr: 900-1150 N/mm²

ASP-18

1000 kN/m max.



ASP-18-31	H=96 (3.78) / R=0.8 (0.031)		
	838 mm	33.00 in	10.9 kg
	415 mm	16.34 in	5.4 kg
	805 mm segmented	31.69 in segmented	10.5 kg
ASP-18-62	H=93.4 (3.68) / R=1.6 (0.062)		
	838 mm	33.00 in	10.9 kg
	415 mm	16.34 in	5.4 kg
	805 mm segmented	31.69 in segmented	10.5 kg
ASP-18-125	H=87.5 (3.44) / R=3.2 (0.125)		
	838 mm	33.00 in	10.9 kg
	415 mm	16.34 in	5.4 kg
	805 mm segmented	31.69 in segmented	10.5 kg

42Cr: 900-1150 N/mm²

ASP-19

860 kN/m max.

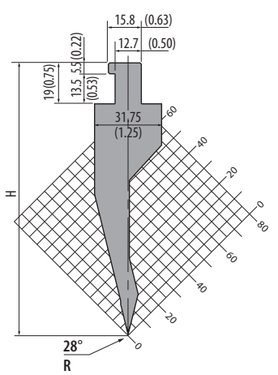

ASP-19-31	H=127 (5.00) / R=0.8 (0.031)		
	838 mm	33.00 in	13.8 kg
	415 mm	16.34 in	6.8 kg
	805 mm segmented	31.69 in segmented	13.3 kg
ASP-19-62	H=124.5 (4.90) / R=1.6 (0.062)		
	838 mm	33.00 in	13.8 kg
	415 mm	16.34 in	6.8 kg
	805 mm segmented	31.69 in segmented	13.3 kg
ASP-19-125	H=118.5 (4.67) / R=3.2 (0.125)		
	838 mm	33.00 in	13.8 kg
	415 mm	16.34 in	6.8 kg
	805 mm segmented	31.69 in segmented	13.3 kg

42Cr: 900-1150 N/mm²

Article on stock
Please ask for delivery time!
1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)
Articles on stock – Please note that delivery time depends on your location.

ASD-85-375

1000 kN/m max.



838 mm	33.00 in	8.0 kg
415 mm	16.34 in	3.9 kg
805 mm segmented	31.69 in segmented	7.6 kg

42Cr: 900-1150 N/mm²

ASD-85-500

1000 kN/m max.



838 mm	33.00 in	8.0 kg
415 mm	16.34 in	3.9 kg
805 mm segmented	31.69 in segmented	7.6 kg

42Cr: 900-1150 N/mm²

ASD-85-625

1000 kN/m max.



838 mm	33.00 in	9.2 kg
415 mm	16.34 in	4.6 kg
805 mm segmented	31.69 in segmented	8.9 kg

42Cr: 900-1150 N/mm²

ASD-85-750

1080 kN/m max.



838 mm	33.00 in	10.5 kg
415 mm	16.34 in	5.2 kg
805 mm segmented	31.69 in segmented	10.1 kg

42Cr: 900-1150 N/mm²

ASD-85-100

950 kN/m max.



838 mm	33.00 in	17.6 kg
415 mm	16.34 in	8.7 kg
805 mm segmented	31.69 in segmented	19.9 kg

42Cr: 900-1150 N/mm²

ASD-75-750

1000 kN/m max.



838 mm	33.00 in	14.7 kg
415 mm	16.34 in	7.3 kg
805 mm segmented	31.69 in segmented	14.1 kg

C45: 560-710 N/mm²

ASD-75-100

950 kN/m max.



838 mm	33.00 in	17.6 kg
415 mm	16.34 in	8.7 kg
805 mm segmented	31.69 in segmented	16.9 kg

C45: 560-710 N/mm²

ASD-75-125

1000 kN/m max.



838 mm	33.00 in	22.2 kg
415 mm	16.34 in	11.0 kg
805 mm segmented	31.69 in segmented	21.3 kg

C45: 560-710 N/mm²

ROLLERI® PROFESSIONAL BENDING

ASD-75-150

1000 kN/m max.



838 mm	33.00 in	25.6 kg
415 mm	16.34 in	12.7 kg
805 mm segmented	31.69 in segmented	24.6 kg

C45: 560-710 N/mm²

ASD-75-200

1000 kN/m max.



838 mm	33.00 in	27.7 kg
415 mm	16.34 in	13.7 kg
805 mm segmented	31.69 in segmented	25.6 kg

C45: 560-710 N/mm²

ASD-28-250

450 kN/m max.



838 mm	33.00 in	7.2 kg
415 mm	16.34 in	3.6 kg
805 mm segmented	31.69 in segmented	6.9 kg

42Cr: 900-1150 N/mm²

ASD-28-375

600 kN/m max.



838 mm	33.00 in	7.8 kg
415 mm	16.34 in	3.9 kg
805 mm segmented	31.69 in segmented	7.5 kg

42Cr: 900-1150 N/mm²

ASD-28-500

860 kN/m max.



838 mm	33.00 in	8.4 kg
415 mm	16.34 in	4.2 kg
805 mm segmented	31.69 in segmented	8.1 kg

42Cr: 900-1150 N/mm²

RX

Tool lengths, sectionings and horn types

Punches:

- **525 mm (20.67 in)**
- **495 mm (19.49 in) segmented**
  8 segments (25, 30, 35, 40, 45, 50, 100, 170)
- **500 mm (19.68 in) segmented**
  3 segments (100 Horn left, 300, 100 Horn right)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX Gasparini

Radius Tools Holder:

- **522 mm (20.55 in)**
- **563 mm (22.17 in) segmented**
  9 segments (42, 47, 52, 57, 62, 67, 72, 77, 87)
- **491 mm (19.33 in) segmented**
  3 segments (97, 297, 97)

Radius Tools:

- **525 mm (20.67 in)**
- **590 mm (23.23 in) segmented**
  9 segments (45, 50, 55, 60, 65, 70, 75, 80, 90)
- **500 mm (19.68 in) segmented**
  3 segments (100, 300, 100)

Radius Tools Gasparini

GASP293-16

1000 kN/m max.

522 mm	20.55 in	83.0 kg
563 mm segmented	22.17 in segmented	89.5 kg
491 mm segmented	19.33 in segmented	78.0 kg

C45: 560-710 N/mm²

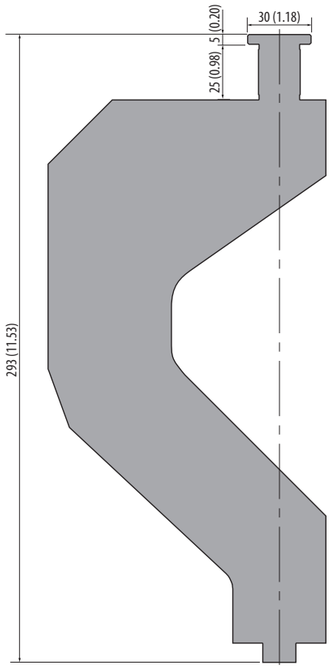

GASP170-16

1800 kN/m max.

522 mm	20.55 in	25.0 kg
563 mm segmented	22.17 in segmented	27.0 kg
491 mm segmented	19.33 in segmented	23.5 kg

C45: 560-710 N/mm²

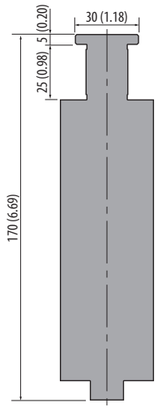

ROLLERI® PROFESSIONAL BENDING

GASP40.60.03

1000 kN/m max.

525 mm	20.67 in	4.7 kg
590 mm segmented	23.23 in segmented	5.3 kg
500 mm segmented	19.68 in segmented	4.5 kg

C45: 560-710 N/mm²



GASP35.60.08

1000 kN/m max.

525 mm	20.67 in	4.7 kg
590 mm segmented	23.23 in segmented	5.3 kg
500 mm segmented	19.68 in segmented	4.5 kg

C45: 560-710 N/mm²



GASP30.60.11.5

1000 kN/m max.

525 mm	20.67 in	4.2 kg
590 mm segmented	23.23 in segmented	4.7 kg
500 mm segmented	19.68 in segmented	4.0 kg

C45: 560-710 N/mm²



GASP30.60.16

1000 kN/m max.

525 mm	20.67 in	4.7 kg
590 mm segmented	23.23 in segmented	5.3 kg
500 mm segmented	19.68 in segmented	4.5 kg

C45: 560-710 N/mm²



GASP30.60.20

1000 kN/m max.

525 mm	20.67 in	5.0 kg
590 mm segmented	23.23 in segmented	5.6 kg
500 mm segmented	19.68 in segmented	4.3 kg

C45: 560-710 N/mm²



GASP30.60.32

1000 kN/m max.

525 mm	20.67 in	7.0 kg
590 mm segmented	23.23 in segmented	7.8 kg
500 mm segmented	19.68 in segmented	6.7 kg

C45: 560-710 N/mm²



GASP35.40.40

1500 kN/m max.

525 mm	20.67 in	10.5 kg
590 mm segmented	23.23 in segmented	11.8 kg
500 mm segmented	19.68 in segmented	10.0 kg

C45: 560-710 N/mm²



GASP55.40.60

1800 kN/m max.

525 mm	20.67 in	24.4 kg
590 mm segmented	23.23 in segmented	27.4 kg
500 mm segmented	19.68 in segmented	23.2 kg

C45: 560-710 N/mm²



Punches Gasparini

GASP200.70.R3-30

1000 kN/m max.

525 mm	20.67 in	31.8 kg
495 mm segmented	19.49 in segmented	30.0 kg
500 mm segmented	19.68 in segmented	30.3 kg

42Cr: 900-1150 N/mm²

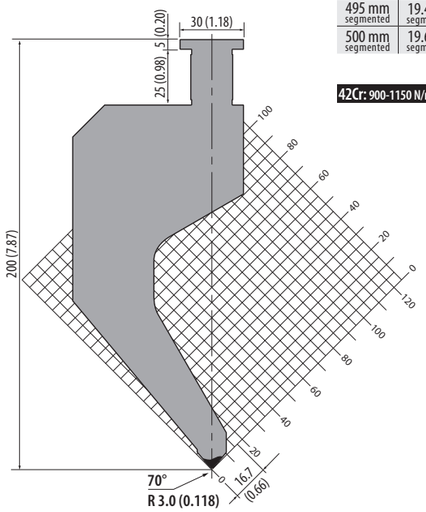

Many more tools available for Heavy Duty on pages 234-235

GASP200.26.R3-30

1300 kN/m max.

525 mm	20.67 in	16.9 kg
495 mm segmented	19.49 in segmented	10.6 kg
500 mm segmented	19.68 in segmented	10.7 kg

42Cr: 900-1150 N/mm²

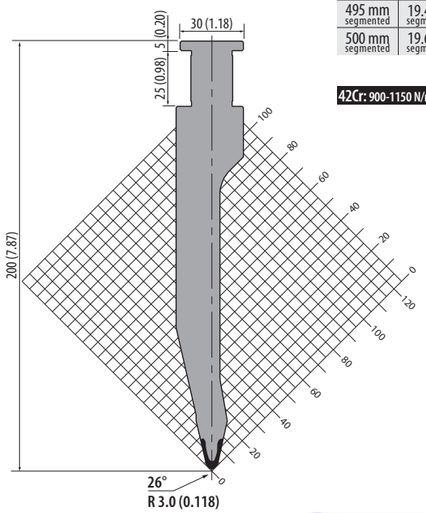

GASP200.26.R6-30

1300 kN/m max.

525 mm	20.67 in	16.9 kg
495 mm segmented	19.49 in segmented	10.6 kg
500 mm segmented	19.68 in segmented	10.7 kg

42Cr: 900-1150 N/mm²

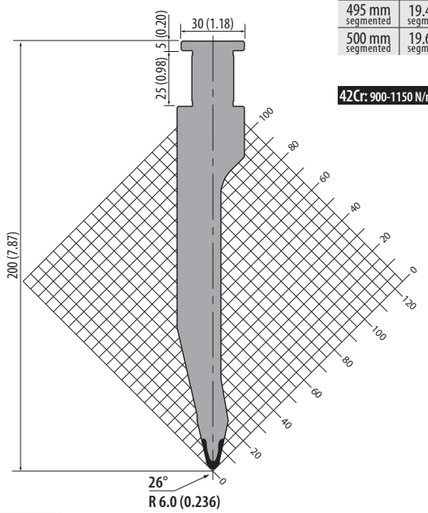

Many more tools available upon request.

Compatible adapters see pages 213 and 217

Ajial-Axial

ROLLERI® PROFESSIONAL BENDING

Tool lengths, sectionings and horn types

Punches:

- **1020 mm (40.16 in)**
- **990 mm (38.98 in) segmented**
  9 segments (100 Horn left, 500, 100, 50, 45, 40, 35, 20, 100 Horn right)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX Ajial-Axial

Punches Ajial-Axial

AXP.100.90.1

1000 kN/m max.

1020 mm	40.16 in	16.3 kg
990 mm segmented	38.98 in segmented	15.8 kg

C45: 560-710 N/mm²



AXP.72.90.1

1000 kN/m max.

1020 mm	40.16 in	10.0 kg
990 mm segmented	38.98 in segmented	9.7 kg

C45: 560-710 N/mm²



AXP.72.85.1

1000 kN/m max.

1020 mm	40.16 in	10.0 kg
990 mm segmented	38.98 in segmented	9.7 kg

C45: 560-710 N/mm²



AXP.72.24.R05

1000 kN/m max.

1020 mm	40.16 in	7.1 kg
990 mm segmented	38.98 in segmented	6.9 kg

C45: 560-710 N/mm²



Adapters Ajial-Axial

AD15

1000 kN/m max.

150 mm	5.91 in	4.0 kg

Rolleri Type RX Ajial-Axial
→ Rolleri Type R1

C45: 560-710 N/mm²



More Punches and Dies available upon request.

Compatible Adapter see pages 217

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Tool lengths, sectionings and horn types

Punches:

- **525 mm (20.67 in)**
- **495 mm (19.49 in) segmented**
  8 segments (25, 30, 35, 40, 45, 50, 100, 170)
- **500 mm (19.68 in) segmented**
  3 segments (100 Horn left, 300, 100 Horn right)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX Colgar

Punches and Radius Tools Colgar

PAC195.85.R08

1000 kN/m max.

525 mm	20.67 in	20.6 kg
495 mm segmented	19.49 in segmented	19.4 kg
500 mm segmented	19.68 in segmented	19.6 kg

42Cr: 900-1150 N/mm²

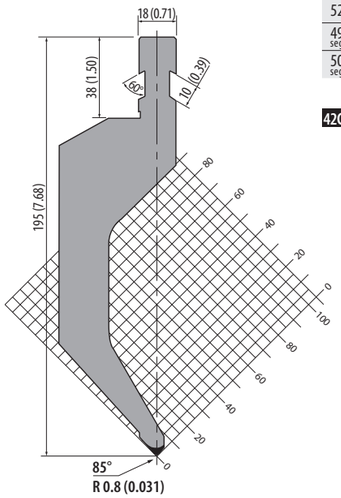

PAC195.60.R08

1000 kN/m max.

525 mm	20.67 in	12.0 kg
495 mm segmented	19.49 in segmented	11.3 kg
500 mm segmented	19.68 in segmented	11.4 kg

42Cr: 900-1150 N/mm²

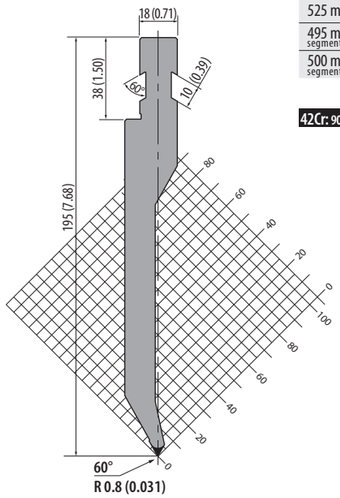

PAC195.26.R08

1000 kN/m max.

525 mm	20.67 in	12.0 kg
495 mm segmented	19.49 in segmented	11.3 kg
500 mm segmented	19.68 in segmented	11.4 kg

42Cr: 900-1150 N/mm²

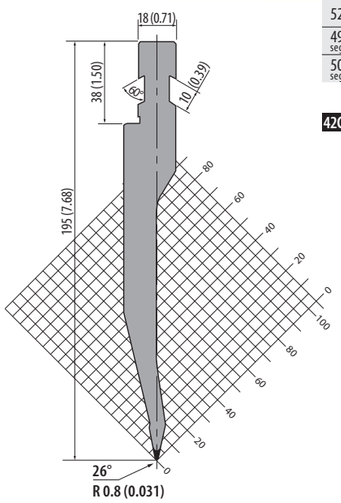

More Punches and Dies available upon request.
Compatible adapter see pages 213, 216

PAC175.14

1000 kN/m max.

830 mm	32.68 in	18.0 kg
412 mm	16.22 in	9.0 kg

C45: 560-710 N/mm²

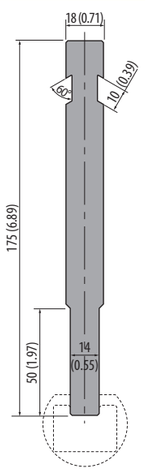

Compatible Radius holders see page 33

ROLLERI® PROFESSIONAL BENDING

Tool lengths, sectionings and horn types

Punches:

- **508 mm (20.00 in)**
- **550 mm (21.65 in) segmented**
  9 segments
  (100 Horn left, 25, 30, 35, 40, 45, 50, 125, 100 Horn right)

Dies:

- **508 mm (20.00 in)**
- **550 mm (21.65 in) segmented**
  9 segments (25, 25, 30, 35, 40, 45, 50, 100, 200)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX LVD

Hemming Tools:

- **525 mm (20.67 in)**
- **495 mm (19.49 in) segmented**
  8 segments (25, 30, 35, 40, 45, 50, 100, 170)

Punch Tangs

Punches LVD have the following
4 different tangs

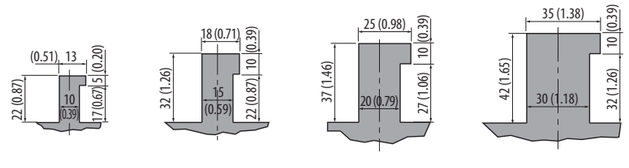

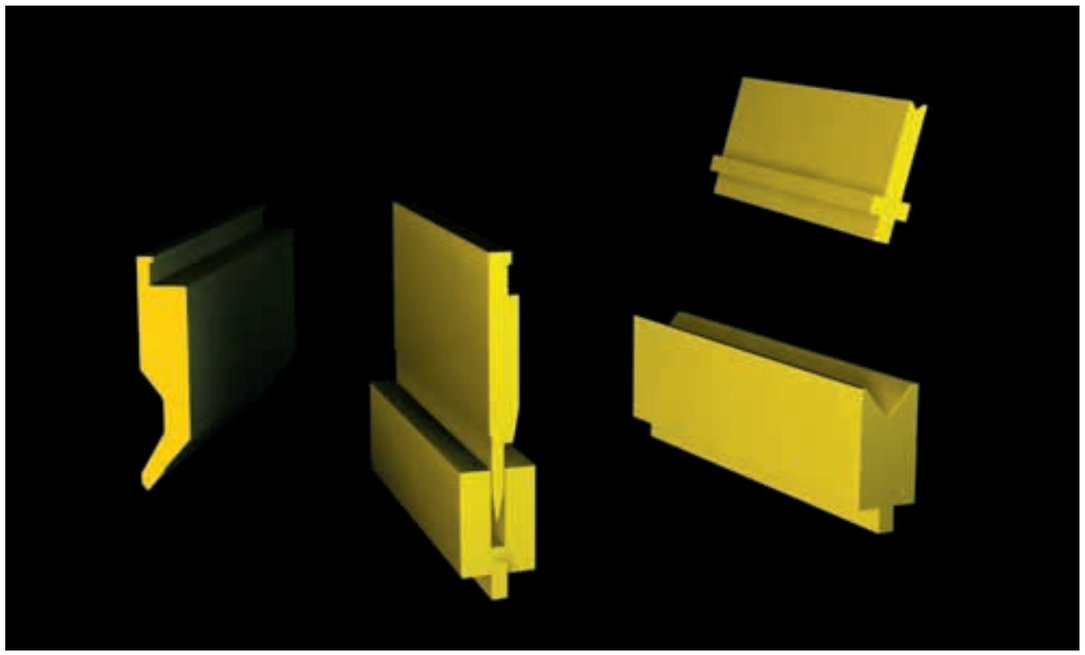

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

LP180.78.R1-A

700 kN/m max.

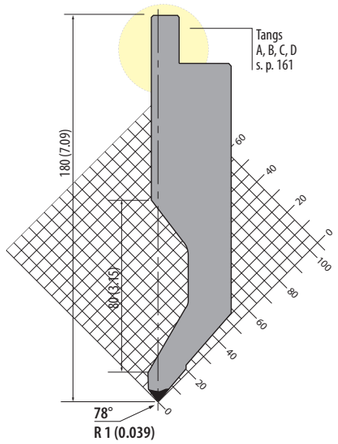

Tang A: **LPA180.78.R1-A**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	23.8 kg

Tang B: **LPB180.78.R1-A**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	23.8 kg

Tang C: **LPC180.78.R1-A**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	23.8 kg

Tang D: **LPD180.78.R1-A**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	23.8 kg

42Cr: 900-1150 N/mm²

LP180.78.R1-B

450 kN/m max.

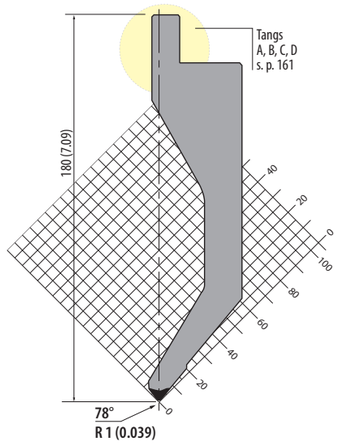

Tang A: **LPA180.78.R1-B**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	24.0 kg

Tang B: **LPB180.78.R1-B**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	24.0 kg

Tang C: **LPC180.78.R1-B**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	24.0 kg

Tang D: **LPD180.78.R1-B**		
508 mm	20.00 in	22.0 kg
550 mm segmented	21.65 in segmented	24.0 kg

42Cr: 900-1150 N/mm²

LP180.78.R1-C

500 kN/m max.

Tang A: **LPA180.78.R1-C**		
508 mm	20.00 in	11.0 kg
550 mm segmented	21.65 in segmented	12.0 kg

Tang B: **LPB180.78.R1-C**		
508 mm	20.00 in	11.0 kg
550 mm segmented	21.65 in segmented	12.0 kg

Tang C: **LPC180.78.R1-C**		
508 mm	20.00 in	11.0 kg
550 mm segmented	21.65 in segmented	12.0 kg

Tang D: **LPD180.78.R1-C**		
508 mm	20.00 in	11.0 kg
550 mm segmented	21.65 in segmented	12.0 kg

42Cr: 900-1150 N/mm²

LP180.78-R2

1000 kN/m max.

Tang A: **LPA180.78-R2**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	9.7 kg

Tang B: **LPB180.78-R2**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	9.7 kg

Tang C: **LPC180.78-R2**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	9.7 kg

Tang D: **LPD180.78-R2**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	9.7 kg

42Cr: 900-1150 N/mm²

LP180.26-R1

500 kN/m max.

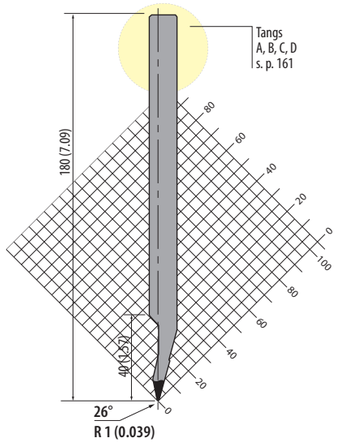

Tang A: **LPA180.26-R1**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	10.0 kg

Tang B: **LPB180.26-R1**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	10.0 kg

Tang C: **LPC180.26-R1**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	10.0 kg

Tang D: **LPD180.26-R1**		
508 mm	20.00 in	9.0 kg
550 mm segmented	21.65 in segmented	10.0 kg

42Cr: 900-1150 N/mm²

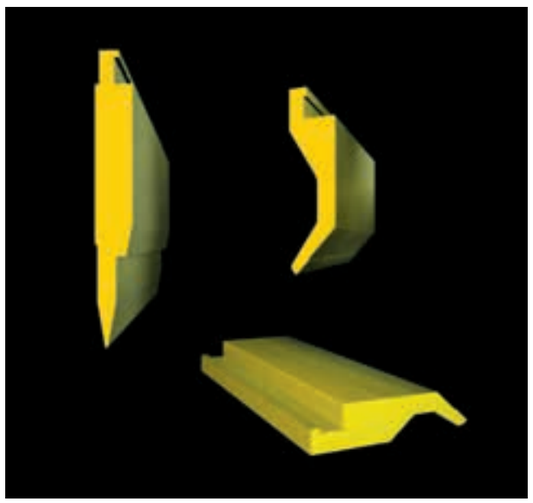

ROLLERI® PROFESSIONAL BENDING

LP.SP-190.20.8

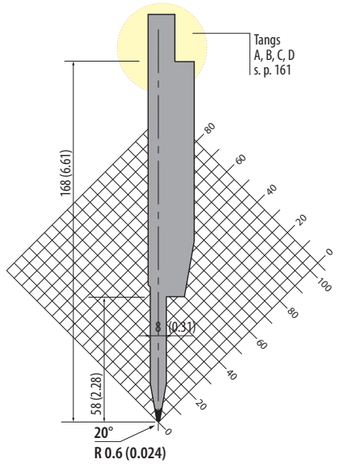

Tang A: **LPA.SP-190.20.8**		
525 mm	20.67 in	13.4 kg
495 mm segmented	19.49 in segmented	12.6 kg

Tang B: **LPB.SP-190.20.8**		
525 mm	20.67 in	13.4 kg
495 mm segmented	19.49 in segmented	12.6 kg

Tang C: **LPC.SP-190.20.8**		
525 mm	20.67 in	13.4 kg
495 mm segmented	19.49 in segmented	12.6 kg

Tang D: **LPD.SP-190.20.8**		
525 mm	20.67 in	13.4 kg
495 mm segmented	19.49 in segmented	12.6 kg

42Cr: 900-1150 N/mm²

LP.SP-190.20.10

Tang A: **LPA.SP-190.20.10**		
525 mm	20.67 in	13.1 kg
495 mm segmented	19.49 in segmented	12.3 kg

Tang B: **LPB.SP-190.20.10**		
525 mm	20.67 in	13.1 kg
495 mm segmented	19.49 in segmented	12.3 kg

Tang C: **LPC.SP-190.20.10**		
525 mm	20.67 in	13.1 kg
495 mm segmented	19.49 in segmented	12.3 kg

Tang D: **LPD.SP-190.20.10**		
525 mm	20.67 in	13.1 kg
495 mm segmented	19.49 in segmented	12.3 kg

42Cr: 900-1150 N/mm²

LP.SP-190.20.12

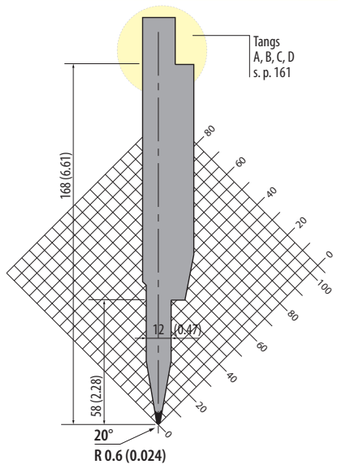

Tang A: **LPA.SP-190.20.12**		
525 mm	20.67 in	13.6 kg
495 mm segmented	19.49 in segmented	12.8 kg

Tang B: **LPB.SP-190.20.12**		
525 mm	20.67 in	13.6 kg
495 mm segmented	19.49 in segmented	12.8 kg

Tang C: **LPC.SP-190.20.12**		
525 mm	20.67 in	13.6 kg
495 mm segmented	19.49 in segmented	12.8 kg

Tang D: **LPD.SP-190.20.12**		
525 mm	20.67 in	13.6 kg
495 mm segmented	19.49 in segmented	12.8 kg

42Cr: 900-1150 N/mm²

LP.SM-190.20.8-12.7 / -12



B=12.7 mm (0.50 in)		
525 mm	20.67 in	18.7 kg
495 mm segmented	19.49 in segmented	17.7 kg

B=12 mm (0.47 in)		
525 mm	20.67 in	18.7 kg
495 mm segmented	19.49 in segmented	17.7 kg

42Cr: 900-1150 N/mm²

LP.SM-190.20.10-12.7 / -12



B=12.7 mm (0.50 in)		
525 mm	20.67 in	18.3 kg
495 mm segmented	19.49 in segmented	17.2 kg

B=12 mm (0.47 in)		
525 mm	20.67 in	18.3 kg
495 mm segmented	19.49 in segmented	17.2 kg

42Cr: 900-1150 N/mm²

LP.SM-190.20.12-12.7 / -12



B=12.7 mm (0.50 in)		
525 mm	20.67 in	17.8 kg
495 mm segmented	19.49 in segmented	16.7 kg

B=12 mm (0.47 in)		
525 mm	20.67 in	17.8 kg
495 mm segmented	19.49 in segmented	16.7 kg

42Cr: 900-1150 N/mm²

Example of Application

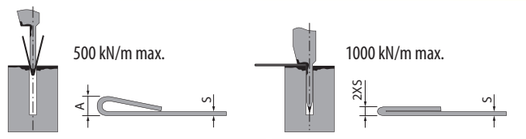

S mm	S in	A mm	A in	R.45 Kgf/mm² t/m	R.70 Kgf/mm² t/m
0.6	0.02	3.0	0.12	9	15
0.8	0.03	3.0	0.12	12	20
1.0	0.04	3.5	0.14	15	25
1.25	0.05	3.5	0.14	17	26

S mm	S in	A mm	A in	R.45 Kgf/mm² t/m	R.70 Kgf/mm² t/m
0.6	0.02	1.2	0.05	23	35
0.8	0.03	1.6	0.06	32	50
1.0	0.04	1.0	0.04	40	60
1.25	0.05	2.5	0.10	50	80

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

LM90.06.78

400 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.6 kg

42Cr: 900-1150 N/mm²

LM90.08.78

400 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.6 kg

42Cr: 900-1150 N/mm²

LM90.10.78

500 kN/m max.



508 mm	20.00 in	7.0 kg
550 mm segmented	21.65 in segmented	7.5 kg

42Cr: 900-1150 N/mm²

LM90.12.78

600 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.7 kg

42Cr: 900-1150 N/mm²

LM90.16.78

800 kN/m max.



508 mm	20.00 in	10.0 kg
550 mm segmented	21.65 in segmented	10.8 kg

42Cr: 900-1150 N/mm²

LM90.20.78

1000 kN/m max.



508 mm	20.00 in	11.9 kg
550 mm segmented	21.65 in segmented	12.8 kg

42Cr: 900-1150 N/mm²

LM90.24.78

1000 kN/m max.



508 mm	20.00 in	10.0 kg
550 mm segmented	21.65 in segmented	10.8 kg

42Cr: 900-1150 N/mm²

LM90.30.78

1100 kN/m max.



508 mm	20.00 in	12.0 kg
550 mm segmented	21.65 in segmented	13.0 kg

42Cr: 900-1150 N/mm²

RX ROLLERI TYPE RX
Dies 78° LVD

ROLLERI® PROFESSIONAL BENDING

LM90.40.78

1300 kN/m max.



508 mm	20.00 in	13.0 kg
550 mm segmented	21.65 in segmented	14.0 kg

42Cr: 900-1150 N/mm²

LM90.50.78

1500 kN/m max.



508 mm	20.00 in	19.5 kg
550 mm segmented	21.65 in segmented	21.0 kg

42Cr: 900-1150 N/mm²

LM90.60.78

1500 kN/m max.



508 mm	20.00 in	23.0 kg
550 mm segmented	21.65 in segmented	24.9 kg

42Cr: 900-1150 N/mm²

LM90.80.78

1500 kN/m max.



508 mm	20.00 in	25.5 kg
550 mm segmented	21.65 in segmented	27.6 kg

42Cr: 900-1150 N/mm²

LM90.100.78

1200 kN/m max.



508 mm	20.00 in	31.0 kg
550 mm segmented	21.65 in segmented	33.5 kg

42Cr: 900-1150 N/mm²

NEW

7 RX

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

LM90.06.30

200 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.6 kg

42Cr: 900-1150 N/mm²

LM90.08.30

220 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.6 kg

42Cr: 900-1150 N/mm²

LM90.10.30

300 kN/m max.



508 mm	20.00 in	8.0 kg
550 mm segmented	21.65 in segmented	8.6 kg

42Cr: 900-1150 N/mm²

LM90.12.30

380 kN/m max.



508 mm	20.00 in	11.9 kg
550 mm segmented	21.65 in segmented	12.6 kg

42Cr: 900-1150 N/mm²

LM90.16.30

380 kN/m max.



508 mm	20.00 in	11.5 kg
550 mm segmented	21.65 in segmented	12.4 kg

42Cr: 900-1150 N/mm²

LM90.20.30

380 kN/m max.



508 mm	20.00 in	13.8 kg
550 mm segmented	21.65 in segmented	15.0 kg

42Cr: 900-1150 N/mm²

LM90.24.30

550 kN/m max.



508 mm	20.00 in	13.0 kg
550 mm segmented	21.65 in segmented	14.0 kg

42Cr: 900-1150 N/mm²

ROLLERI® PROFESSIONAL BENDING

LM70

508 mm	20.00 in	16.8 kg
550 mm segmented	21.65 in segmented	18.2 kg

42Cr: 900-1150 N/mm²



	V1	V2	V3	V4	V5	V6
V mm (in)	12 (0.47)	12 (0.47)	35 (1.38)	24 (0.94)	16 (0.63)	8 (0.31)
Angle	30°	78°	78°	78°	78°	78°
kN/m max.	1300	600	1300	1200	950	500

LM90

508 mm	20.00 in	25.4 kg
550 mm segmented	21.65 in segmented	27.5 kg

42Cr: 900-1150 N/mm²

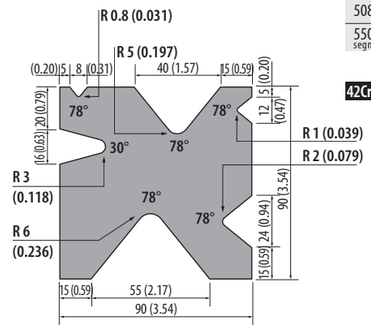

	V1	V2	V3	V4	V5	V6
V mm (in)	8 (0.31)	40 (1.57)	12 (0.47)	24 (0.94)	55 (2.17)	16 (0.63)
Angle	78°	78°	78°	78°	78°	30°
kN/m max.	550	1400	550	650	1000	1000

LM130

508 mm	20.00 in	51.8 kg
550 mm segmented	21.65 in segmented	56.1 kg

42Cr: 900-1150 N/mm²

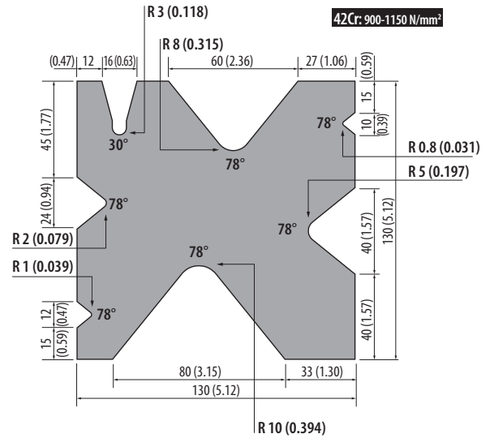

	V1	V2	V3	V4	V5	V6	V7
V mm (in)	16 (0.63)	60 (2.36)	10 (0.39)	80 (3.15)	40 (1.57)	12 (0.47)	24 (0.94)
Angle	30°	78°	78°	78°	78°	78°	78°
kN/m max.	650	1500	650	1250	1500	480	1500

LM180

508 mm	20.00 in	87.9 kg
550 mm segmented	21.65 in segmented	95.2 kg

42Cr: 900-1150 N/mm²

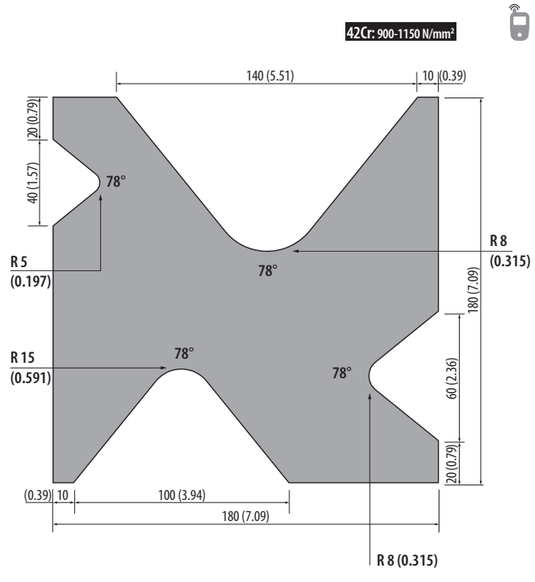

	V1	V2	V3	V4
V mm (in)	140 (5.51)	60 (2.36)	100 (3.94)	40 (1.57)
Angle	78°	78°	78°	78°
kN/m max.	550	650	700	320

7 RX

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Adapters LVD

AD1

1000 kN/m max.



Tang A: **AD1-A**		
150 mm	5.91 in	3.1 kg
Tang B: AD1-B		
150 mm	5.91 in	3.1 kg
Tang C: AD1-C		
150 mm	5.91 in	3.1 kg
Tang D: AD1-D		
150 mm	5.91 in	3.1 kg

Rolleri Type RX LVD
→ Rolleri Type R1

C45: 560-710 N/mm²

AD20 LVD

1000 kN/m max.



Tang A: **AD20 LVD-A**		
150 mm	5.91 in	3.6 kg
Tang B: AD20 LVD-B		
150 mm	5.91 in	3.8 kg
Tang C: AD20 LVD-C		
150 mm	5.91 in	4.0 kg
Tang D: AD20 LVD-D		
150 mm	5.91 in	4.0 kg

Rolleri Type RX LVD
→ Rolleri Type R2

C45: 560-710 N/mm²



AD8-12.7

1000 kN/m max.



1000 mm	39.37 in	15.0 kg
500 mm	19.68 in	7.5 kg

Rolleri Type RX LVD
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

AD9-12.7

1000 kN/m max.



835 mm	32.87 in	17.0 kg
415 mm	16.34 in	8.5 kg

Rolleri Type RX LVD
→ Rolleri Type R1

C45: 560-710 N/mm²

Modification: Wedge Bar / Tail

To use Dies Rolleri Type R1, a 10 mm (0.39 in) groove is milled and polished in order to fit a wedge bar / tail of the required measurment.

A31

Wedge Bar / Tail:
12 x 29 mm (0.47 x 1.14) for
- Rolleri Type RX LVD



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A32

Wedge Bar / Tail:
12.7 x 29 mm (0.50 x 1.14) for
- Rolleri Type RX LVD



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

Colly

ROLLERI® PROFESSIONAL BENDING

Tool lengths, sectionings and horn types

Punches:
- **1020 mm (40.16 in)**
- **1250 mm (49.21 in) segmented**
  15 segments (100 Horn left, 30, 30, 30, 35, 40, 40, 45, 45, 50, 50, 55, 500, 100, 100 Horn right)

Dies:
- **1020 mm (40.16 in)**
- **1250 mm (49.21 in) segmented**
  14 segments (100, 30, 30, 30, 35, 40, 40, 45, 45, 50, 50, 55, 500, 200)



Standard-Horn Type
for all segmented
Punches Rolleri
Type RX Colly

Punches Colly

CP72.90.08



1020 mm	40.16 in	10.2 kg
1250 mm segmented	49.21 in segmented	12.5 kg

C45: 560-710 N/mm²

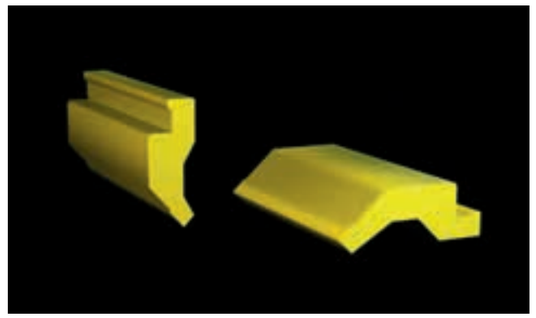

CP120.88.08

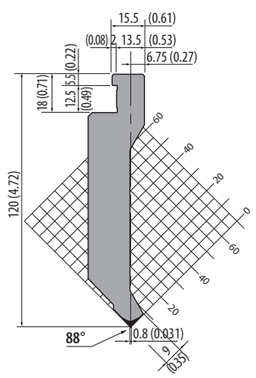

1020 mm	40.16 in	18.5 kg
1250 mm segmented	49.21 in segmented	22.6 kg

C45: 560-710 N/mm²

CP100.88.08-A



1020 mm	40.16 in	16.7 kg
1250 mm segmented	49.21 in segmented	20.4 kg

C45: 560-710 N/mm²

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

CP200.85.07

1020 mm	40.16 in	31.6 kg
1250 mm segmented	49.21 in segmented	49.0 kg

42Cr: 900-1150 N/mm²

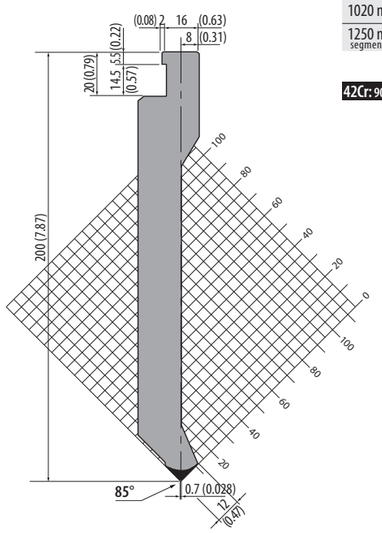

CP200.85.07-A

1020 mm	40.16 in	49.0 kg
1250 mm segmented	49.21 in segmented	60.0 kg

42Cr: 900-1150 N/mm²

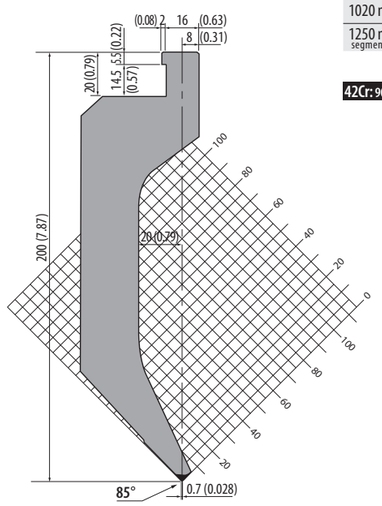

CP120.85.07

1020 mm	40.16 in	17.9 kg
1250 mm segmented	49.21 in segmented	21.9 kg

C45: 560-710 N/mm²

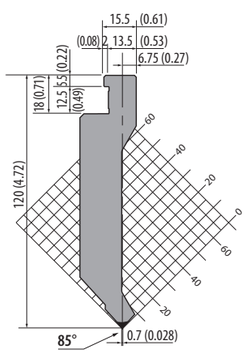

CP120.85.07-A

1020 mm	40.16 in	25.5 kg
1250 mm segmented	49.21 in segmented	31.3 kg

C45: 560-710 N/mm²

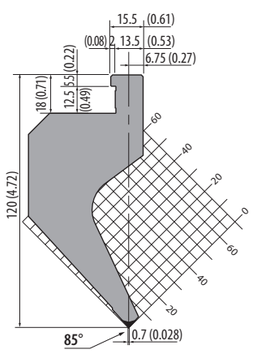

CP100.85.07-A

1020 mm	40.16 in	16.7 kg
1250 mm segmented	49.21 in segmented	20.4 kg

C45: 560-710 N/mm²



CP72.85.07

1020 mm	40.16 in	10.0 kg
1250 mm segmented	49.21 in segmented	12.3 kg

C45: 560-710 N/mm²



CP200.50.R1

1020 mm	40.16 in	31.0 kg
1250 mm segmented	49.21 in segmented	38.0 kg

42Cr: 900-1150 N/mm²

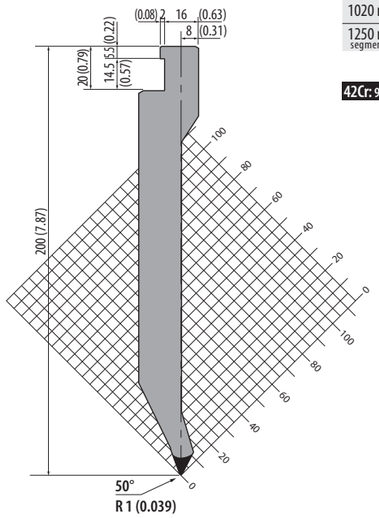

CP200.50.R1-A

1020 mm	40.16 in	52.0 kg
1250 mm segmented	49.21 in segmented	63.7 kg

42Cr: 900-1150 N/mm²

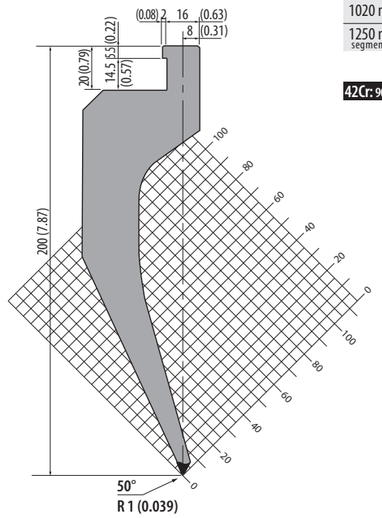

CP120.50.R1

1020 mm	40.16 in	17.0 kg
1250 mm segmented	49.21 in segmented	20.8 kg

C45: 560-710 N/mm²

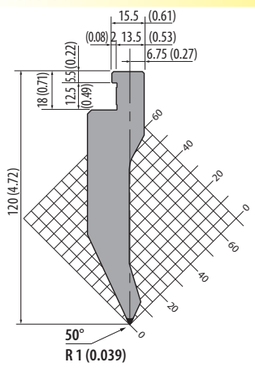

CP120.50.R1-A

1020 mm	40.16 in	31.0 kg
1250 mm segmented	49.21 in segmented	38.0 kg

42Cr: 900-1150 N/mm²

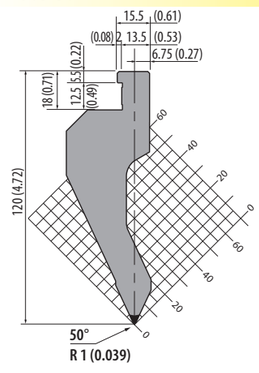

CP100.50.R1

1020 mm	40.16 in	13.0 kg
1250 mm segmented	49.21 in segmented	16.0 kg

42Cr: 900-1150 N/mm²



Bolted Adapters
see page 217

CP200.24.R1

1020 mm	40.16 in	22.0 kg
1250 mm segmented	49.21 in segmented	26.9 kg

42Cr: 900-1150 N/mm²

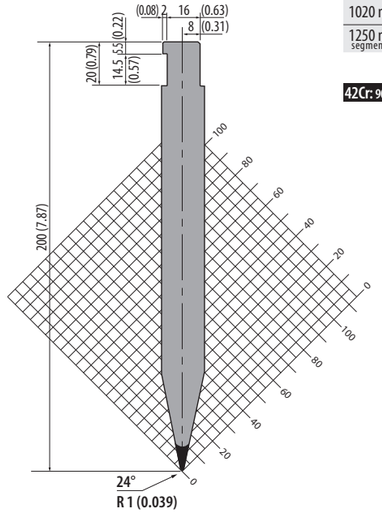

Article on stock
Please ask for delivery time!
1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)
Articles on stock – Please note that delivery time depends on your location.

M115.80.60

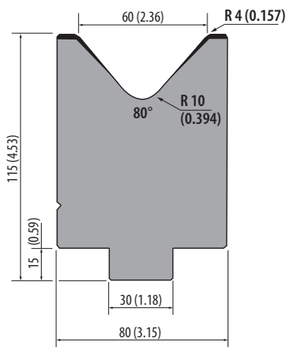

1020 mm	40.16 in	60.0 kg
1250 mm segmented	49.21 in segmented	73.6 kg

C45: 560-710 N/mm²

M115.80.80

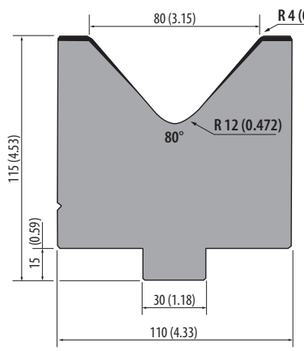

1020 mm	40.16 in	80.0 kg
1250 mm segmented	49.21 in segmented	98.0 kg

C45: 560-710 N/mm²

M115.50.16



1020 mm	40.16 in	26.5 kg
1250 mm segmented	49.21 in segmented	32.4 kg

C45: 560-710 N/mm²

M115.50.22



1020 mm	40.16 in	25.5 kg
1250 mm segmented	49.21 in segmented	31.2 kg

C45: 560-710 N/mm²

M115.50.30



1020 mm	40.16 in	34.5 kg
1250 mm segmented	49.21 in segmented	43.0 kg

C45: 560-710 N/mm²

M115.50.40



1020 mm	40.16 in	36.0 kg
1250 mm segmented	49.21 in segmented	44.0 kg

C45: 560-710 N/mm²

M115.50.50



1020 mm	40.16 in	45.5 kg
1250 mm segmented	49.21 in segmented	55.7 kg

C45: 560-710 N/mm²

M115.24.16



1020 mm	40.16 in	24.9 kg
1250 mm segmented	49.21 in segmented	31.0 kg

C45: 560-710 N/mm²

MC112.3050

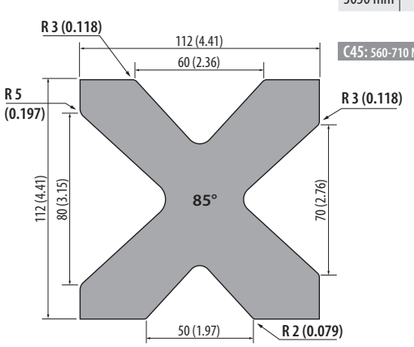

3050 mm	120.08 in	188.0 kg

C45: 560-710 N/mm²

MC80.2050 / MC80.3050



2050 mm	80.71 in	66.0 kg
3050 mm	120.08 in	98.0 kg

C45: 560-710 N/mm²

MC74.2050 / MC74.3050



2050 mm	80.71 in	67.0 kg
3050 mm	120.08 in	101.0 kg

C45: 560-710 N/mm²

	V1	V2	V3	V4	V5	V6	V7	V8	V9
V mm (in)	8 (0.31)	24 (0.94)	10 (0.39)	8 (0.31)	45 (1.77)	18 (0.71)	12 (0.47)	14 (0.55)	32 (1.26)
Angle	90°	85°	90°	90°	85°	85°	30°	85°	85°
R mm (in)	0.8 (0.031)	0.8 (0.031)	2.0 (0.079)	0.8 (0.031)	2.0 (0.079)	1.0 (0.039)	2.0 (0.079)	2.0 (0.079)	2.0 (0.079)

MC54.2050 / MC54.3050



2050 mm	80.71 in	35.6 kg
3050 mm	120.08 in	53.0 kg

C45: 560-710 N/mm²

	V1	V2	V3	V4	V5	V6	V7	V8	V9
V mm (in)	6 (0.24)	25 (0.98)	6 (0.24)	6 (0.24)	12 (0.47)	9 (0.35)	16 (0.63)	9 (0.35)	32 (1.26)
Angle	90°	85°	90°	30°	30°	90°	85°	90°	85°
R mm (in)	0.5 (0.020)	1.0 (0.039)	0.5 (0.020)	2.0 (0.079)	0.5 (0.020)	1.0 (0.039)	0.5 (0.020)	1.5 (0.059)	1.0 (0.039)

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Tool lengths, sectionings and horn types

Punches H11:



Punches H12:



Punches H21:



Dies H31, H41:



Punches Hämmerle-Bystronic

H11.010.0

600 kN/m max.



Model	Length		Weight
H11.010.01.01	100	3.94	0.17 kg
H11.010.02.01	50	1.97	0.09 kg
H11.010.02.02	55	2.17	0.09 kg
H11.010.02.03	60	2.36	0.10 kg
H11.010.02.04	65	2.56	0.11 kg
H11.010.02.05	70	2.76	0.12 kg
H11.010.02.06	75	2.95	0.13 kg
H11.010.02.07	80	3.15	0.14 kg
H11.010.02.08	85	3.35	0.14 kg
H11.010.02.09	90	3.54	0.15 kg
H11.010.02.10	95	3.74	0.16 kg
H11.010.04.01	75 DX	2.95 DX	0.12 kg
H11.010.04.02	85 DX	3.35 DX	0.14 kg
H11.010.04.03	95 DX	3.74 DX	0.15 kg
H11.010.04.04	105 DX	4.13 DX	0.17 kg
H11.010.04.05	115 DX	4.53 DX	0.19 kg
H11.010.04.06	80 SX	3.15 SX	0.13 kg
H11.010.05.01	75 SX	2.95 SX	0.12 kg
H11.010.05.02	85 SX	3.35 SX	0.14 kg
H11.010.05.03	95 SX	3.74 SX	0.15 kg
H11.010.05.04	105 SX	4.13 SX	0.17 kg
H11.010.05.05	115 SX	4.53 SX	0.19 kg
H11.010.05.06	80 DX	3.15 DX	0.13 kg

HRc 58-60

H11.007.0

1000 kN/m max.



Model	Length		Weight
H11.007.01.01	100	3.94	0.26 kg
H11.007.02.01	50	1.97	0.13 kg
H11.007.02.02	55	2.17	0.14 kg
H11.007.02.03	60	2.36	0.16 kg
H11.007.02.04	65	2.56	0.17 kg
H11.007.02.05	70	2.76	0.18 kg
H11.007.02.06	75	2.95	0.20 kg
H11.007.02.07	80	3.15	0.21 kg
H11.007.02.08	85	3.35	0.22 kg
H11.007.02.09	90	3.54	0.23 kg
H11.007.02.10	95	3.74	0.25 kg
H11.007.04.01	75 DX	2.95 DX	0.18 kg
H11.007.04.02	85 DX	3.35 DX	0.21 kg
H11.007.04.03	95 DX	3.74 DX	0.23 kg
H11.007.04.04	105 DX	4.13 DX	0.25 kg
H11.007.04.05	115 DX	4.53 DX	0.29 kg
H11.007.04.06	80 SX	3.15 SX	0.20 kg
H11.007.05.01	75 SX	2.95 SX	0.18 kg
H11.007.05.02	85 SX	3.35 SX	0.21 kg
H11.007.05.03	95 SX	3.74 SX	0.23 kg
H11.007.05.04	105 SX	4.13 SX	0.25 kg
H11.007.05.05	115 SX	4.53 SX	0.29 kg
H11.007.05.06	80 DX	3.15 DX	0.20 kg

HRc 58-60

ROLLERI® PROFESSIONAL BENDING

H11.002.0

1000 kN/m max.



Model	Length		Weight
H11.002.01.01	100	3.94	0.40 kg
H11.002.02.01	50	1.97	0.20 kg
H11.002.02.02	55	2.17	0.22 kg
H11.002.02.03	60	2.36	0.24 kg
H11.002.02.04	65	2.56	0.26 kg
H11.002.02.05	70	2.76	0.28 kg
H11.002.02.06	75	2.95	0.30 kg
H11.002.02.07	80	3.15	0.32 kg
H11.002.02.08	85	3.35	0.34 kg
H11.002.02.09	90	3.54	0.36 kg
H11.002.02.10	95	3.74	0.38 kg
H11.002.04.01	75 DX	2.95 DX	0.28 kg
H11.002.04.02	85 DX	3.35 DX	0.32 kg
H11.002.04.03	95 DX	3.74 DX	0.36 kg
H11.002.04.04	105 DX	4.13 DX	0.38 kg
H11.002.04.05	115 DX	4.53 DX	0.44 kg
H11.002.04.06	80 SX	3.15 SX	0.30 kg
H11.002.05.01	75 SX	2.95 SX	0.28 kg
H11.002.05.02	85 SX	3.35 SX	0.32 kg
H11.002.05.03	95 SX	3.74 SX	0.36 kg
H11.002.05.04	105 SX	4.13 SX	0.38 kg
H11.002.05.05	115 SX	4.53 SX	0.44 kg
H11.002.05.06	80 DX	3.15 DX	0.30 kg

HRc 58-60

H11.001.0

1000 kN/m max.



Model	Length		Weight
H11.001.01.01	100	3.94	0.40 kg
H11.001.02.01	50	1.97	0.20 kg
H11.001.02.02	55	2.17	0.22 kg
H11.001.02.03	60	2.36	0.24 kg
H11.001.02.04	65	2.56	0.26 kg
H11.001.02.05	70	2.76	0.28 kg
H11.001.02.06	75	2.95	0.30 kg
H11.001.02.07	80	3.15	0.32 kg
H11.001.02.08	85	3.35	0.34 kg
H11.001.02.09	90	3.54	0.36 kg
H11.001.02.10	95	3.74	0.38 kg
H11.001.04.01	75 DX	2.95 DX	0.28 kg
H11.001.04.02	85 DX	3.35 DX	0.32 kg
H11.001.04.03	95 DX	3.74 DX	0.36 kg
H11.001.04.04	105 DX	4.13 DX	0.38 kg
H11.001.04.05	115 DX	4.53 DX	0.44 kg
H11.001.04.06	80 SX	3.15 SX	0.30 kg
H11.001.05.01	75 SX	2.95 SX	0.28 kg
H11.001.05.02	85 SX	3.35 SX	0.32 kg
H11.001.05.03	95 SX	3.74 SX	0.36 kg
H11.001.05.04	105 SX	4.13 SX	0.38 kg
H11.001.05.05	115 SX	4.53 SX	0.44 kg
H11.001.05.06	80 DX	3.15 DX	0.30 kg

HRc 58-60

H11.008.0

1000 kN/m max.



Model	Length		Weight
H11.008.01.01	100	3.94	0.44 kg
H11.008.02.01	50	1.97	0.22 kg
H11.008.02.02	55	2.17	0.24 kg
H11.008.02.03	60	2.36	0.26 kg
H11.008.02.04	65	2.56	0.29 kg
H11.008.02.05	70	2.76	0.31 kg
H11.008.02.06	75	2.95	0.33 kg
H11.008.02.07	80	3.15	0.35 kg
H11.008.02.08	85	3.35	0.37 kg
H11.008.02.09	90	3.54	0.40 kg
H11.008.02.10	95	3.74	0.42 kg
H11.008.04.01	75 DX	2.95 DX	0.31 kg
H11.008.04.02	85 DX	3.35 DX	0.35 kg
H11.008.04.03	95 DX	3.74 DX	0.40 kg
H11.008.04.04	105 DX	4.13 DX	0.46 kg
H11.008.04.05	115 DX	4.53 DX	0.48 kg
H11.008.04.06	80 SX	3.15 SX	0.33 kg
H11.008.05.01	75 SX	2.95 SX	0.31 kg
H11.008.05.02	85 SX	3.35 SX	0.35 kg
H11.008.05.03	95 SX	3.74 SX	0.40 kg
H11.008.05.04	105 SX	4.13 SX	0.46 kg
H11.008.05.05	115 SX	4.53 SX	0.48 kg
H11.008.05.06	80 DX	3.15 DX	0.33 kg

HRc 58-60

H11.006.0

1000 kN/m max.



Model	Length		Weight
H11.006.01.01	100	3.94	0.44 kg
H11.006.02.01	50	1.97	0.23 kg
H11.006.02.02	55	2.17	0.25 kg
H11.006.02.03	60	2.36	0.27 kg
H11.006.02.04	65	2.56	0.29 kg
H11.006.02.05	70	2.76	0.32 kg
H11.006.02.06	75	2.95	0.34 kg
H11.006.02.07	80	3.15	0.36 kg
H11.006.02.08	85	3.35	0.38 kg
H11.006.02.09	90	3.54	0.41 kg
H11.006.02.10	95	3.74	0.43 kg
H11.006.04.01	75 DX	2.95 DX	0.32 kg
H11.006.04.02	85 DX	3.35 DX	0.36 kg
H11.006.04.03	95 DX	3.74 DX	0.41 kg
H11.006.04.04	105 DX	4.13 DX	0.44 kg
H11.006.04.05	115 DX	4.53 DX	0.50 kg
H11.006.04.06	80 SX	3.15 SX	0.34 kg
H11.006.05.01	75 SX	2.95 SX	0.32 kg
H11.006.05.02	85 SX	3.35 SX	0.36 kg
H11.006.05.03	95 SX	3.74 SX	0.41 kg
H11.006.05.04	105 SX	4.13 SX	0.44 kg
H11.006.05.05	115 SX	4.53 SX	0.50 kg
H11.006.05.06	80 DX	3.15 DX	0.34 kg

HRc 58-60

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

H11.034.0

1000 kN/m max.



Model	Length		Weight
H11.034.01.01	100	3.94	0.63 kg
H11.034.02.01	50	1.97	0.32 kg
H11.034.02.02	55	2.17	0.35 kg
H11.034.02.03	60	2.36	0.38 kg
H11.034.02.04	65	2.56	0.41 kg
H11.034.02.05	70	2.76	0.44 kg
H11.034.02.06	75	2.95	0.47 kg
H11.034.02.07	80	3.15	0.50 kg
H11.034.02.08	85	3.35	0.54 kg
H11.034.02.09	90	3.54	0.57 kg
H11.034.02.10	95	3.74	0.60 kg
H11.034.04.01	75 DX	2.95 DX	0.44 kg
H11.034.04.02	85 DX	3.35 DX	0.50 kg
H11.034.04.03	95 DX	3.74 DX	0.57 kg
H11.034.04.04	105 DX	4.13 DX	0.63 kg
H11.034.04.05	115 DX	4.53 DX	0.69 kg
H11.034.04.06	80 SX	3.15 SX	0.47 kg
H11.034.05.01	75 SX	2.95 SX	0.44 kg
H11.034.05.02	85 SX	3.35 SX	0.50 kg
H11.034.05.03	95 SX	3.74 SX	0.57 kg
H11.034.05.04	105 SX	4.13 SX	0.63 kg
H11.034.05.05	115 SX	4.53 SX	0.69 kg
H11.034.05.06	80 DX	3.15 DX	0.47 kg

HRc 58-60

H11.003.0

1000 kN/m max.

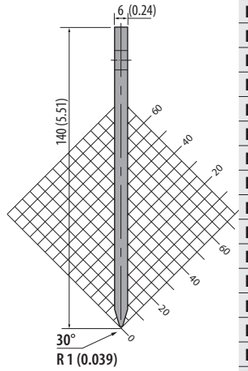

Model	Length		Weight
H11.003.01.01	100	3.94	0.63 kg
H11.003.02.01	50	1.97	0.32 kg
H11.003.02.02	55	2.17	0.35 kg
H11.003.02.03	60	2.36	0.38 kg
H11.003.02.04	65	2.56	0.41 kg
H11.003.02.05	70	2.76	0.44 kg
H11.003.02.06	75	2.95	0.47 kg
H11.003.02.07	80	3.15	0.50 kg
H11.003.02.08	85	3.35	0.54 kg
H11.003.02.09	90	3.54	0.57 kg
H11.003.02.10	95	3.74	0.60 kg
H11.003.04.01	75 DX	2.95 DX	0.44 kg
H11.003.04.02	85 DX	3.35 DX	0.50 kg
H11.003.04.03	95 DX	3.74 DX	0.57 kg
H11.003.04.04	105 DX	4.13 DX	0.63 kg
H11.003.04.05	115 DX	4.53 DX	0.69 kg
H11.003.04.06	80 SX	3.15 SX	0.47 kg
H11.003.05.01	75 SX	2.95 SX	0.44 kg
H11.003.05.02	85 SX	3.35 SX	0.50 kg
H11.003.05.03	95 SX	3.74 SX	0.57 kg
H11.003.05.04	105 SX	4.13 SX	0.63 kg
H11.003.05.05	115 SX	4.53 SX	0.69 kg
H11.003.05.06	80 DX	3.15 DX	0.47 kg

HRc 58-60

H11.005.0

1000 kN/m max.



Model	Length		Weight
H11.005.01.01	100	3.94	0.43 kg
H11.005.02.01	50	1.97	0.22 kg
H11.005.02.02	55	2.17	0.24 kg
H11.005.02.03	60	2.36	0.26 kg
H11.005.02.04	65	2.56	0.28 kg
H11.005.02.05	70	2.76	0.30 kg
H11.005.02.06	75	2.95	0.32 kg
H11.005.02.07	80	3.15	0.34 kg
H11.005.02.08	85	3.35	0.37 kg
H11.005.02.09	90	3.54	0.39 kg
H11.005.02.10	95	3.74	0.41 kg
H11.005.04.01	75 DX	2.95 DX	0.30 kg
H11.005.04.02	85 DX	3.35 DX	0.34 kg
H11.005.04.03	95 DX	3.74 DX	0.39 kg
H11.005.04.04	105 DX	4.13 DX	0.40 kg
H11.005.04.05	115 DX	4.53 DX	0.47 kg
H11.005.04.06	80 SX	3.15 SX	0.32 kg
H11.005.05.01	75 SX	2.95 SX	0.30 kg
H11.005.05.02	85 SX	3.35 SX	0.34 kg
H11.005.05.03	95 SX	3.74 SX	0.39 kg
H11.005.05.04	105 SX	4.13 SX	0.40 kg
H11.005.05.05	115 SX	4.53 SX	0.47 kg
H11.005.05.06	80 DX	3.15 DX	0.32 kg

HRc 58-60

H11.009.1

1000 kN/m max.



Model	Length		Weight
H11.009.10.01	100	3.94	1.20 kg
H11.009.12.01	50	1.97	0.60 kg
H11.009.12.02	55	2.17	0.66 kg
H11.009.12.03	60	2.36	0.72 kg
H11.009.12.04	65	2.56	0.78 kg
H11.009.12.05	70	2.76	0.84 kg
H11.009.12.06	75	2.95	0.90 kg
H11.009.12.07	80	3.15	0.96 kg
H11.009.12.08	85	3.35	1.02 kg
H11.009.12.09	90	3.54	1.08 kg
H11.009.12.10	95	3.74	1.14 kg
H11.009.14.01	75 DX	2.95 DX	0.84 kg
H11.009.14.02	85 DX	3.35 DX	0.96 kg
H11.009.14.03	95 DX	3.74 DX	1.08 kg
H11.009.14.04	105 DX	4.13 DX	1.21 kg
H11.009.14.05	115 DX	4.53 DX	1.32 kg
H11.009.14.06	80 SX	3.15 SX	0.90 kg
H11.009.15.01	75 SX	2.95 SX	0.84 kg
H11.009.15.02	85 SX	3.35 SX	0.96 kg
H11.009.15.03	95 SX	3.74 SX	1.08 kg
H11.009.15.04	105 SX	4.13 SX	1.21 kg
H11.009.15.05	115 SX	4.53 SX	1.32 kg
H11.009.15.06	80 DX	3.15 DX	0.90 kg

HRc 58-60

H14.021.0

1000 kN/m max.



Model	Length		Weight
H14.021.01.01	100	3.94	1.09 kg
H14.021.02.01	50	1.97	0.55 kg
H14.021.02.02	55	2.17	0.60 kg
H14.021.02.03	60	2.36	0.65 kg
H14.021.02.04	65	2.56	0.71 kg
H14.021.02.05	70	2.76	0.76 kg
H14.021.02.06	75	2.95	0.82 kg
H14.021.02.07	80	3.15	0.87 kg
H14.021.02.08	85	3.35	0.93 kg
H14.021.02.09	90	3.54	0.98 kg
H14.021.02.10	95	3.74	1.04 kg

HRc 58-60

H11.033.1

1000 kN/m max.



Model	Length		Weight
H11.033.11.01	100	3.94	0.46 kg
H11.033.12.01	50	1.97	0.23 kg
H11.033.12.02	55	2.17	0.25 kg
H11.033.12.03	60	2.36	0.28 kg
H11.033.12.04	65	2.56	0.30 kg
H11.033.12.05	70	2.76	0.32 kg
H11.033.12.06	75	2.95	0.35 kg
H11.033.12.07	80	3.15	0.37 kg
H11.033.12.08	85	3.35	0.39 kg
H11.033.12.09	90	3.54	0.41 kg
H11.033.12.10	95	3.74	0.44 kg
H11.033.14.01	75 DX	2.95 DX	0.32 kg
H11.033.14.02	85 DX	3.35 DX	0.37 kg
H11.033.14.03	95 DX	3.74 DX	0.41 kg
H11.033.14.04	105 DX	4.13 DX	0.44 kg
H11.033.14.05	115 DX	4.53 DX	0.51 kg
H11.033.14.06	80 SX	3.15 SX	0.35 kg
H11.033.15.01	75 SX	2.95 SX	0.32 kg
H11.033.15.02	85 SX	3.35 SX	0.37 kg
H11.033.15.03	95 SX	3.74 SX	0.41 kg
H11.033.15.04	105 SX	4.13 SX	0.44 kg
H11.033.15.05	115 SX	4.53 SX	0.51 kg
H11.033.15.06	80 DX	3.15 DX	0.35 kg

HRc 58-60

H11.035.0

1000 kN/m max.



Model	Length		Weight
H11.035.01.01	100	3.94	0.63 kg
H11.035.02.01	50	1.97	0.32 kg
H11.035.02.02	55	2.17	0.35 kg
H11.035.02.03	60	2.36	0.38 kg
H11.035.02.04	65	2.56	0.41 kg
H11.035.02.05	70	2.76	0.44 kg
H11.035.02.06	75	2.95	0.47 kg
H11.035.02.07	80	3.15	0.50 kg
H11.035.02.08	85	3.35	0.54 kg
H11.035.02.09	90	3.54	0.57 kg
H11.035.02.10	95	3.74	0.60 kg
H11.035.04.01	75 DX	2.95 DX	0.44 kg
H11.035.04.02	85 DX	3.35 DX	0.50 kg
H11.035.04.03	95 DX	3.74 DX	0.57 kg
H11.035.04.04	105 DX	4.13 DX	0.63 kg
H11.035.04.05	115 DX	4.53 DX	0.69 kg
H11.035.04.06	80 SX	3.15 SX	0.47 kg
H11.035.05.01	75 SX	2.95 SX	0.44 kg
H11.035.05.02	85 SX	3.35 SX	0.50 kg
H11.035.05.03	95 SX	3.74 SX	0.57 kg
H11.035.05.04	105 SX	4.13 SX	0.63 kg
H11.035.05.05	115 SX	4.53 SX	0.69 kg
H11.035.05.06	80 DX	3.15 DX	0.47 kg

HRc 58-60

H11.036.0

1000 kN/m max.



Model	Length		Weight
H11.036.01.01	100	3.94	0.74 kg
H11.036.02.01	50	1.97	0.37 kg
H11.036.02.02	55	2.17	0.41 kg
H11.036.02.03	60	2.36	0.44 kg
H11.036.02.04	65	2.56	0.48 kg
H11.036.02.05	70	2.76	0.52 kg
H11.036.02.06	75	2.95	0.56 kg
H11.036.02.07	80	3.15	0.59 kg
H11.036.02.08	85	3.35	0.63 kg
H11.036.02.09	90	3.54	0.67 kg
H11.036.02.10	95	3.74	0.70 kg
H11.036.04.01	75 DX	2.95 DX	0.52 kg
H11.036.04.02	85 DX	3.35 DX	0.59 kg
H11.036.04.03	95 DX	3.74 DX	0.67 kg
H11.036.04.04	105 DX	4.13 DX	0.74 kg
H11.036.04.05	115 DX	4.53 DX	0.81 kg
H11.036.04.06	80 SX	3.15 SX	0.56 kg
H11.036.05.01	75 SX	2.95 SX	0.52 kg
H11.036.05.02	85 SX	3.35 SX	0.59 kg
H11.036.05.03	95 SX	3.74 SX	0.67 kg
H11.036.05.04	105 SX	4.13 SX	0.74 kg
H11.036.05.05	115 SX	4.53 SX	0.81 kg
H11.036.05.06	80 DX	3.15 DX	0.56 kg

HRc 58-60

H12.014.0

975 kN/m max.

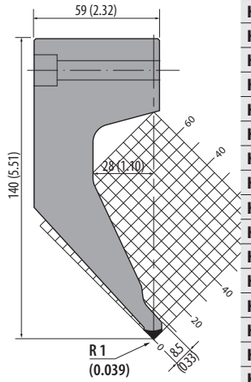

Model	Length		Weight
H12.014.01.01	100	3.94	3.36 kg
H12.014.02.01	50	1.97	1.68 kg
H12.014.02.02	55	2.17	1.85 kg
H12.014.02.03	60	2.36	2.02 kg
H12.014.02.04	65	2.56	2.18 kg
H12.014.02.05	70	2.76	2.35 kg
H12.014.02.06	75	2.95	2.52 kg
H12.014.02.07	80	3.15	2.69 kg
H12.014.02.08	85	3.35	2.86 kg
H12.014.02.09	90	3.54	3.02 kg
H12.014.02.10	95	3.74	3.19 kg
H12.014.04.01	75 DX	2.95 DX	2.35 kg
H12.014.04.02	85 DX	3.35 DX	2.69 kg
H12.014.04.03	95 DX	3.74 DX	3.02 kg
H12.014.04.04	105 DX	4.13 DX	3.03 kg
H12.014.04.05	115 DX	4.53 DX	3.70 kg
H12.014.04.06	80 SX	3.15 SX	2.52 kg
H12.014.05.01	75 SX	2.95 SX	2.35 kg
H12.014.05.02	85 SX	3.35 SX	2.69 kg
H12.014.05.03	95 SX	3.74 SX	3.02 kg
H12.014.05.04	105 SX	4.13 SX	3.03 kg
H12.014.05.05	115 SX	4.53 SX	3.70 kg
H12.014.05.06	80 DX	3.15 DX	2.52 kg

42Cr: 900-1150 N/mm²

H12.052.0

975 kN/m max.

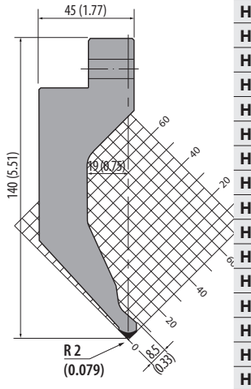

Model	Length		Weight
H12.052.01.01	100	3.94	2.63 kg
H12.052.02.01	50	1.97	1.32 kg
H12.052.02.02	55	2.17	1.45 kg
H12.052.02.03	60	2.36	1.58 kg
H12.052.02.04	65	2.56	1.71 kg
H12.052.02.05	70	2.76	1.84 kg
H12.052.02.06	75	2.95	1.97 kg
H12.052.02.07	80	3.15	2.10 kg
H12.052.02.08	85	3.35	2.24 kg
H12.052.02.09	90	3.54	2.37 kg
H12.052.02.10	95	3.74	2.50 kg
H12.052.04.01	75 DX	2.95 DX	1.84 kg
H12.052.04.02	85 DX	3.35 DX	2.10 kg
H12.052.04.03	95 DX	3.74 DX	2.37 kg
H12.052.04.04	105 DX	4.13 DX	2.50 kg
H12.052.04.05	115 DX	4.53 DX	2.89 kg
H12.052.04.06	80 SX	3.15 SX	1.97 kg
H12.052.05.01	75 SX	2.95 SX	1.84 kg
H12.052.05.02	85 SX	3.35 SX	2.10 kg
H12.052.05.03	95 SX	3.74 SX	2.37 kg
H12.052.05.04	105 SX	4.13 SX	2.50 kg
H12.052.05.05	115 SX	4.53 SX	2.89 kg
H12.052.05.06	80 DX	3.15 DX	1.97 kg

42Cr: 900-1150 N/mm²

H12.053.0

975 kN/m max.

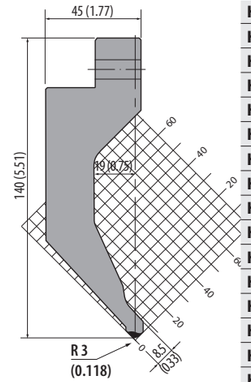

Model	Length		Weight
H12.053.01.01	100	3.94	2.65 kg
H12.053.02.01	50	1.97	1.33 kg
H12.053.02.02	55	2.17	1.46 kg
H12.053.02.03	60	2.36	1.59 kg
H12.053.02.04	65	2.56	1.72 kg
H12.053.02.05	70	2.76	1.86 kg
H12.053.02.06	75	2.95	1.99 kg
H12.053.02.07	80	3.15	2.12 kg
H12.053.02.08	85	3.35	2.25 kg
H12.053.02.09	90	3.54	2.39 kg
H12.053.02.10	95	3.74	2.52 kg
H12.053.04.01	75 DX	2.95 DX	1.86 kg
H12.053.04.02	85 DX	3.35 DX	2.12 kg
H12.053.04.03	95 DX	3.74 DX	2.39 kg
H12.053.04.04	105 DX	4.13 DX	2.60 kg
H12.053.04.05	115 DX	4.53 DX	2.92 kg
H12.053.04.06	80 SX	3.15 SX	1.99 kg
H12.053.05.01	75 SX	2.95 SX	1.86 kg
H12.053.05.02	85 SX	3.35 SX	2.12 kg
H12.053.05.03	95 SX	3.74 SX	2.39 kg
H12.053.05.04	105 SX	4.13 SX	2.60 kg
H12.053.05.05	115 SX	4.53 SX	2.92 kg
H12.053.05.06	80 DX	3.15 DX	1.99 kg

42Cr: 900-1150 N/mm²

H12.019.0

975 kN/m max.

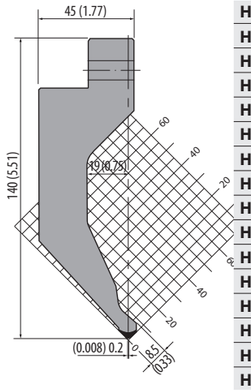

Model	Length		Weight
H12.019.01.01	100	3.94	2.60 kg
H12.019.02.01	50	1.97	1.30 kg
H12.019.02.02	55	2.17	1.43 kg
H12.019.02.03	60	2.36	1.56 kg
H12.019.02.04	65	2.56	1.69 kg
H12.019.02.05	70	2.76	1.82 kg
H12.019.02.06	75	2.95	1.95 kg
H12.019.02.07	80	3.15	2.08 kg
H12.019.02.08	85	3.35	2.21 kg
H12.019.02.09	90	3.54	2.34 kg
H12.019.02.10	95	3.74	2.47 kg
H12.019.04.01	75 DX	2.95 DX	1.82 kg
H12.019.04.02	85 DX	3.35 DX	2.08 kg
H12.019.04.03	95 DX	3.74 DX	2.34 kg
H12.019.04.04	105 DX	4.13 DX	2.46 kg
H12.019.04.05	115 DX	4.53 DX	2.86 kg
H12.019.04.06	80 SX	3.15 SX	1.95 kg
H12.019.05.01	75 SX	2.95 SX	1.82 kg
H12.019.05.02	85 SX	3.35 SX	2.08 kg
H12.019.05.03	95 SX	3.74 SX	2.34 kg
H12.019.05.04	105 SX	4.13 SX	2.46 kg
H12.019.05.05	115 SX	4.53 SX	2.86 kg
H12.019.05.06	80 DX	3.15 DX	1.95 kg

42Cr: 900-1150 N/mm²

H12.015.0

975 kN/m max.

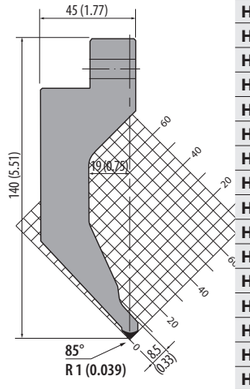

Model	Length		Weight
H12.015.01.01	100	3.94	2.63 kg
H12.015.02.01	50	1.97	1.32 kg
H12.015.02.02	55	2.17	1.45 kg
H12.015.02.03	60	2.36	1.58 kg
H12.015.02.04	65	2.56	1.71 kg
H12.015.02.05	70	2.76	1.84 kg
H12.015.02.06	75	2.95	1.97 kg
H12.015.02.07	80	3.15	2.10 kg
H12.015.02.08	85	3.35	2.24 kg
H12.015.02.09	90	3.54	2.37 kg
H12.015.02.10	95	3.74	2.50 kg
H12.015.04.01	75 DX	2.95 DX	1.84 kg
H12.015.04.02	85 DX	3.35 DX	2.10 kg
H12.015.04.03	95 DX	3.74 DX	2.37 kg
H12.015.04.04	105 DX	4.13 DX	2.30 kg
H12.015.04.05	115 DX	4.53 DX	2.89 kg
H12.015.04.06	80 SX	3.15 SX	1.97 kg
H12.015.05.01	75 SX	2.95 SX	1.84 kg
H12.015.05.02	85 SX	3.35 SX	2.10 kg
H12.015.05.03	95 SX	3.74 SX	2.37 kg
H12.015.05.04	105 SX	4.13 SX	2.30 kg
H12.015.05.05	115 SX	4.53 SX	2.89 kg
H12.015.05.06	80 DX	3.15 DX	1.97 kg

42Cr: 900-1150 N/mm²

H12.025.0

250 kN/m max.

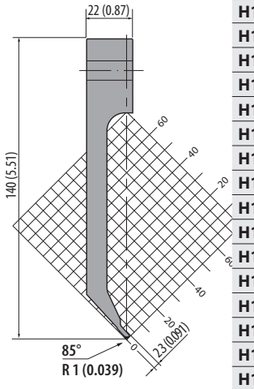

Model	Length		Weight
H12.025.01.01	100	3.94	1.36 kg
H12.025.02.01	50	1.97	0.68 kg
H12.025.02.02	55	2.17	0.75 kg
H12.025.02.03	60	2.36	0.82 kg
H12.025.02.04	65	2.56	0.88 kg
H12.025.02.05	70	2.76	0.95 kg
H12.025.02.06	75	2.95	1.02 kg
H12.025.02.07	80	3.15	1.09 kg
H12.025.02.08	85	3.35	1.16 kg
H12.025.02.09	90	3.54	1.22 kg
H12.025.02.10	95	3.74	1.29 kg
H12.025.04.01	75 DX	2.95 DX	0.95 kg
H12.025.04.02	85 DX	3.35 DX	1.09 kg
H12.025.04.03	95 DX	3.74 DX	1.22 kg
H12.025.04.04	105 DX	4.13 DX	1.35 kg
H12.025.04.05	115 DX	4.53 DX	1.50 kg
H12.025.04.06	80 SX	3.15 SX	1.02 kg
H12.025.05.01	75 SX	2.95 SX	0.95 kg
H12.025.05.02	85 SX	3.35 SX	1.09 kg
H12.025.05.03	95 SX	3.74 SX	1.22 kg
H12.025.05.04	105 SX	4.13 SX	1.35 kg
H12.025.05.05	115 SX	4.53 SX	1.50 kg
H12.025.05.06	80 DX	3.15 DX	1.02 kg

42Cr: 900-1150 N/mm²

H12.017.0

750 kN/m max.

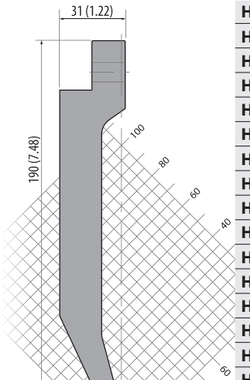

Model	Length		Weight
H12.017.01.01	100	3.94	2.76 kg
H12.017.02.01	50	1.97	1.38 kg
H12.017.02.02	55	2.17	1.52 kg
H12.017.02.03	60	2.36	1.66 kg
H12.017.02.04	65	2.56	1.79 kg
H12.017.02.05	70	2.76	1.93 kg
H12.017.02.06	75	2.95	2.07 kg
H12.017.02.07	80	3.15	2.21 kg
H12.017.02.08	85	3.35	2.35 kg
H12.017.02.09	90	3.54	2.48 kg
H12.017.02.10	95	3.74	2.62 kg
H12.017.04.01	75 DX	2.95 DX	1.93 kg
H12.017.04.02	85 DX	3.35 DX	2.21 kg
H12.017.04.03	95 DX	3.74 DX	2.48 kg
H12.017.04.04	105 DX	4.13 DX	3.03 kg
H12.017.04.05	115 DX	4.53 DX	3.04 kg
H12.017.04.06	80 SX	3.15 SX	2.07 kg
H12.017.05.01	75 SX	2.95 SX	1.93 kg
H12.017.05.02	85 SX	3.35 SX	2.21 kg
H12.017.05.03	95 SX	3.74 SX	2.48 kg
H12.017.05.04	105 SX	4.13 SX	3.03 kg
H12.017.05.05	115 SX	4.53 SX	3.04 kg
H12.017.05.06	80 DX	3.15 DX	2.07 kg

42Cr: 900-1150 N/mm²

H12.065.0

1000 kN/m max.

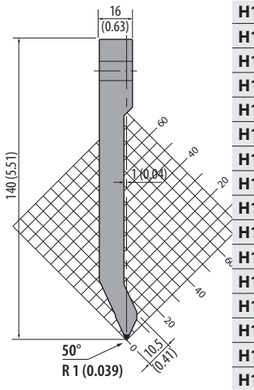

Model	Length		Weight
H12.065.01.01	100	3.94	1.36 kg
H12.065.02.01	50	1.97	0.68 kg
H12.065.02.02	55	2.17	0.75 kg
H12.065.02.03	60	2.36	0.82 kg
H12.065.02.04	65	2.56	0.88 kg
H12.065.02.05	70	2.76	0.95 kg
H12.065.02.06	75	2.95	1.02 kg
H12.065.02.07	80	3.15	1.09 kg
H12.065.02.08	85	3.35	1.16 kg
H12.065.02.09	90	3.54	1.22 kg
H12.065.02.10	95	3.74	1.29 kg
H12.065.04.01	75 DX	2.95 DX	0.95 kg
H12.065.04.02	85 DX	3.35 DX	1.09 kg
H12.065.04.03	95 DX	3.74 DX	1.22 kg
H12.065.04.04	105 DX	4.13 DX	1.35 kg
H12.065.04.05	115 DX	4.53 DX	1.50 kg
H12.065.04.06	80 SX	3.15 SX	1.02 kg
H12.065.05.01	75 SX	2.95 SX	0.95 kg
H12.065.05.02	85 SX	3.35 SX	1.09 kg
H12.065.05.03	95 SX	3.74 SX	1.22 kg
H12.065.05.04	105 SX	4.13 SX	1.35 kg
H12.065.05.05	115 SX	4.53 SX	1.50 kg
H12.065.05.06	80 DX	3.15 DX	1.02 kg

42Cr: 900-1150 N/mm²

Punch holders Hämmerle-Bystronic

H21.003.0

1000 kN/m max.



Model	Length		Weight
H21.003.01.01	100	3.94	1.18 kg
H21.003.01.03	200	7.87	2.36 kg
H21.003.02.01	50	1.97	0.59 kg
H21.003.02.02	55	2.17	0.65 kg
H21.003.02.03	60	2.36	0.71 kg
H21.003.02.04	65	2.56	0.77 kg
H21.003.02.05	70	2.76	0.83 kg
H21.003.02.06	75	2.95	0.89 kg
H21.003.02.07	80	3.15	0.94 kg
H21.003.02.08	85	3.35	1.00 kg
H21.003.02.09	90	3.54	1.06 kg
H21.003.02.10	95	3.74	1.12 kg
H21.003.04.01	75 DX	2.95 DX	0.83 kg
H21.003.04.02	85 DX	3.35 DX	0.94 kg
H21.003.04.03	95 DX	3.74 DX	1.06 kg
H21.003.04.04	105 DX	4.13 DX	1.15 kg
H21.003.04.05	115 DX	4.53 DX	1.30 kg
H21.003.04.06	80 SX	3.15 SX	0.89 kg
H21.003.05.01	75 SX	2.95 SX	0.83 kg
H21.003.05.02	85 SX	3.35 SX	0.94 kg
H21.003.05.03	95 SX	3.74 SX	1.06 kg
H21.003.05.04	105 SX	4.13 SX	1.12 kg
H21.003.05.05	115 SX	4.53 SX	1.30 kg
H21.003.05.06	80 DX	3.15 DX	0.89 kg

C45: 560-710 N/mm²

H21.002.0

1000 kN/m max.



Model	Length		Weight
H21.002.01.01	100	3.94	2.44 kg
H21.002.01.03	200	7.87	4.88 kg
H21.002.02.01	50	1.97	1.22 kg
H21.002.02.02	55	2.17	1.34 kg
H21.002.02.03	60	2.36	1.46 kg
H21.002.02.04	65	2.56	1.59 kg
H21.002.02.05	70	2.76	1.71 kg
H21.002.02.06	75	2.95	1.83 kg
H21.002.02.07	80	3.15	1.95 kg
H21.002.02.08	85	3.35	2.07 kg
H21.002.02.09	90	3.54	2.20 kg
H21.002.02.10	95	3.74	2.32 kg
H21.002.04.01	75 DX	2.95 DX	1.71 kg
H21.002.04.02	85 DX	3.35 DX	1.95 kg
H21.002.04.03	95 DX	3.74 DX	2.20 kg
H21.002.04.04	105 DX	4.13 DX	2.40 kg
H21.002.04.05	115 DX	4.53 DX	2.68 kg
H21.002.04.06	80 SX	3.15 SX	1.83 kg
H21.002.05.01	75 SX	2.95 SX	1.70 kg
H21.002.05.02	85 SX	3.35 SX	1.95 kg
H21.002.05.03	95 SX	3.74 SX	2.20 kg
H21.002.05.04	105 SX	4.13 SX	2.40 kg
H21.002.05.05	115 SX	4.53 SX	2.68 kg
H21.002.05.06	80 DX	3.15 DX	1.83 kg

C45: 560-710 N/mm²

H21.005.0

1000 kN/m max.



Model	Length		Weight
H21.005.01.01	100	3.94	5.06 kg
H21.005.01.03	200	7.87	10.12 kg
H21.005.02.01	50	1.97	2.53 kg
H21.005.02.02	55	2.17	2.78 kg
H21.005.02.03	60	2.36	3.04 kg
H21.005.02.04	65	2.56	3.29 kg
H21.005.02.05	70	2.76	3.54 kg
H21.005.02.06	75	2.95	3.80 kg
H21.005.02.07	80	3.15	4.05 kg
H21.005.02.08	85	3.35	4.30 kg
H21.005.02.09	90	3.54	4.55 kg
H21.005.02.10	95	3.74	4.81 kg
H21.005.04.01	75 DX	2.95 DX	3.54 kg
H21.005.04.02	85 DX	3.35 DX	4.05 kg
H21.005.04.03	95 DX	3.74 DX	4.55 kg
H21.005.04.04	105 DX	4.13 DX	5.00 kg
H21.005.04.05	115 DX	4.53 DX	5.57 kg
H21.005.04.06	80 SX	3.15 SX	3.80 kg
H21.005.05.01	75 SX	2.95 SX	3.54 kg
H21.005.05.02	85 SX	3.35 SX	4.05 kg
H21.005.05.03	95 SX	3.74 SX	4.55 kg
H21.005.05.04	105 SX	4.13 SX	5.00 kg
H21.005.05.05	115 SX	4.53 SX	5.57 kg
H21.005.05.06	80 DX	3.15 DX	3.80 kg

C45: 560-710 N/mm²

H21.010.0

1000 kN/m max.



Model	Length		Weight
H21.010.01.01	100	3.94	6.04 kg
H21.010.01.03	200	7.87	12.00 kg
H21.010.02.01	50	1.97	3.00 kg
H21.010.02.02	55	2.17	3.32 kg
H21.010.02.03	60	2.36	3.60 kg
H21.010.02.04	65	2.56	3.93 kg
H21.010.02.05	70	2.76	4.23 kg
H21.010.02.06	75	2.95	4.53 kg
H21.010.02.07	80	3.15	4.83 kg
H21.010.02.08	85	3.35	5.13 kg
H21.010.02.09	90	3.54	5.44 kg
H21.010.02.10	95	3.74	5.74 kg
H21.010.04.01	75 DX	2.95 DX	4.23 kg
H21.010.04.02	85 DX	3.35 DX	4.83 kg
H21.010.04.03	95 DX	3.74 DX	5.44 kg
H21.010.04.04	105 DX	4.13 DX	6.10 kg
H21.010.04.05	115 DX	4.53 DX	6.64 kg
H21.010.04.06	80 SX	3.15 SX	4.53 kg
H21.010.05.01	75 SX	2.95 SX	4.23 kg
H21.010.05.02	85 SX	3.35 SX	4.83 kg
H21.010.05.03	95 SX	3.74 SX	5.44 kg
H21.010.05.04	105 SX	4.13 SX	6.10 kg
H21.010.05.05	115 SX	4.53 SX	6.64 kg
H21.010.05.06	80 DX	3.15 DX	4.53 kg

C45: 560-710 N/mm²

Punch holders Hämmerle-Bystronic

ROLLERI® PROFESSIONAL BENDING

H21.004.0

1000 kN/m max.



Model	Length		Weight
H21.004.01.01	100	3.94	1.82 kg
H21.004.01.03	200	7.87	3.64 kg
H21.004.02.01	50	1.97	0.91 kg
H21.004.02.02	55	2.17	1.00 kg
H21.004.02.03	60	2.36	1.09 kg
H21.004.02.04	65	2.56	1.18 kg
H21.004.02.05	70	2.76	1.27 kg
H21.004.02.06	75	2.95	1.37 kg
H21.004.02.07	80	3.15	1.46 kg
H21.004.02.08	85	3.35	1.55 kg
H21.004.02.09	90	3.54	1.64 kg
H21.004.02.10	95	3.74	1.73 kg
H21.004.04.01	75 DX	2.95 DX	1.27 kg
H21.004.04.02	85 DX	3.35 DX	1.46 kg
H21.004.04.03	95 DX	3.74 DX	1.64 kg
H21.004.04.04	105 DX	4.13 DX	1.80 kg
H21.004.04.05	115 DX	4.53 DX	2.00 kg
H21.004.04.06	80 SX	3.15 SX	1.37 kg
H21.004.05.01	75 SX	2.95 SX	1.27 kg
H21.004.05.02	85 SX	3.35 SX	1.46 kg
H21.004.05.03	95 SX	3.74 SX	1.64 kg
H21.004.05.04	105 SX	4.13 SX	1.80 kg
H21.004.05.05	115 SX	4.53 SX	2.00 kg
H21.004.05.06	80 DX	3.15 DX	1.37 kg

C45: 560-710 N/mm²

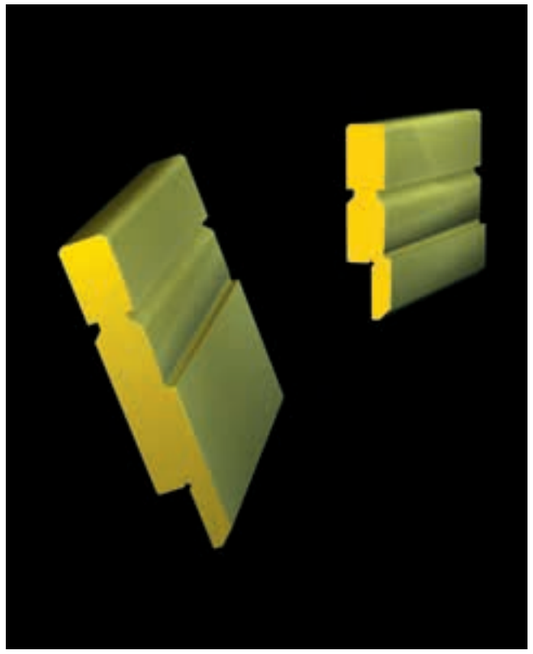

H22.006.0

600 kN/m max.

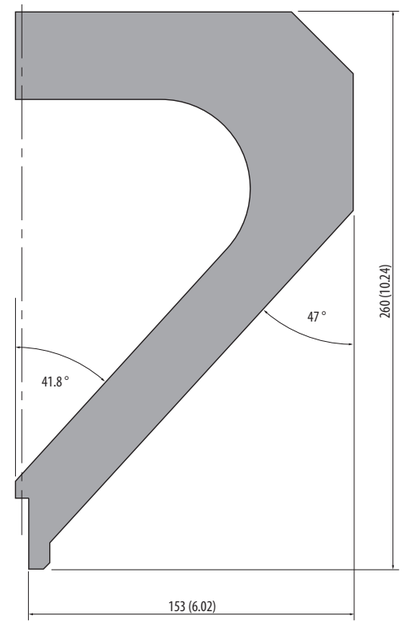

Model	Length		Weight
H22.006.01.01	100	3.94	10.3 kg
H22.006.02.01	50	1.97	5.15 kg
H22.006.02.02	55	2.17	5.67 kg
H22.006.02.03	60	2.36	6.18 kg
H22.006.02.04	65	2.56	6.70 kg
H22.006.02.05	70	2.76	7.21 kg
H22.006.02.06	75	2.95	7.73 kg
H22.006.02.07	80	3.15	8.24 kg
H22.006.02.08	85	3.35	8.76 kg
H22.006.02.09	90	3.54	9.27 kg
H22.006.02.10	95	3.74	9.79 kg

42Cr: 900-1150 N/mm²

RX

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

H22.013.0

1000 kN/m max.



Model	Length		Weight
H22.013.01.01	100	3.94	2.82 kg
H22.013.02.01	50	1.97	1.41 kg
H22.013.02.02	55	2.17	1.55 kg
H22.013.02.03	60	2.36	1.69 kg
H22.013.02.04	65	2.56	1.83 kg
H22.013.02.05	70	2.76	1.97 kg
H22.013.02.06	75	2.95	2.12 kg
H22.013.02.07	80	3.15	2.26 kg
H22.013.02.08	85	3.35	2.40 kg
H22.013.02.09	90	3.54	2.54 kg
H22.013.02.10	95	3.74	2.68 kg

C45: 560-710 N/mm²

H22.014.0

1000 kN/m max.

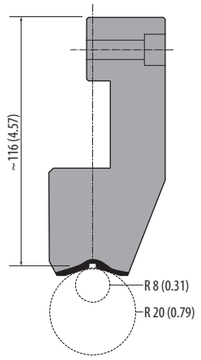

Model	Length		Weight
H22.014.01.01	100	3.94	3.06 kg
H22.014.02.01	50	1.97	1.53 kg
H22.014.02.02	55	2.17	1.68 kg
H22.014.02.03	60	2.36	1.83 kg
H22.014.02.04	65	2.56	1.98 kg
H22.014.02.05	70	2.76	2.14 kg
H22.014.02.06	75	2.95	2.29 kg
H22.014.02.07	80	3.15	2.44 kg
H22.014.02.08	85	3.35	2.59 kg
H22.014.02.09	90	3.54	2.75 kg
H22.014.02.10	95	3.74	2.90 kg

C45: 560-710 N/mm²

H22.015.0

1000 kN/m max.

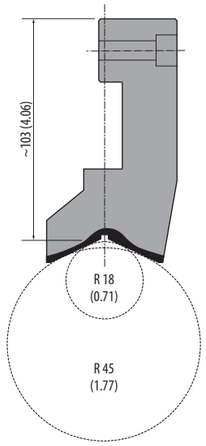

Model	Length		Weight
H22.015.01.01	100	3.94	3.28 kg
H22.015.02.01	50	1.97	1.64 kg
H22.015.02.02	55	2.17	1.80 kg
H22.015.02.03	60	2.36	1.97 kg
H22.015.02.04	65	2.56	2.13 kg
H22.015.02.05	70	2.76	2.30 kg
H22.015.02.06	75	2.95	2.46 kg
H22.015.02.07	80	3.15	2.62 kg
H22.015.02.08	85	3.35	2.79 kg
H22.015.02.09	90	3.54	2.95 kg
H22.015.02.10	95	3.74	3.12 kg

C45: 560-710 N/mm²

ROLLERI® PROFESSIONAL BENDING

H61.100.01 / H61.500.01

Model	Length		Weight
H61.100.01	100	3.94	0.63 kg
H61.500.01	500	19.68	3.15 kg

C45: 560-710 N/mm²

H61.100.02 / H61.500.02



Model	Length		Weight
H61.100.02	100	3.94	0.70 kg
H61.500.02	500	19.68	3.50 kg

C45: 560-710 N/mm²

H61.100.03 / H61.500.03



Model	Length	Price	Weight
H61.100.03	100	3.94	0.70 kg
H61.500.03	500	19.68	3.50 kg

C45: 560-710 N/mm²

H61.100.04 / H61.500.04

Model	Length		Weight
H61.100.04	100	3.94	0.63 kg
H61.500.04	500	19.68	3.15 kg

C45: 560-710 N/mm²

H61.100.05 / H61.500.05

Model	Length		Weight
H61.100.05	100	3.94	0.30 kg
H61.500.05	500	19.68	1.50 kg

C45: 560-710 N/mm²

H61.100.06 / H61.500.06

Model	Length		Weight
H61.100.06	100	3.94	0.63 kg
H61.500.06	500	19.68	3.15 kg

C45: 560-710 N/mm²

H61.100.07

Model	Length		Weight
H61.100.07	100	3.94	0.65 kg

C45: 560-710 N/mm²

H61.100.08 / H61.500.08



Model	Length		Weight
H61.100.08	100	3.94	0.70 kg
H61.500.08	500	19.68	3.50 kg

C45: 560-710 N/mm²

Rolleri Videos

find updated and helpful videos at:
www.rolleritools.com/videos/overview

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

H41.005.0

1000 kN/m max.



Model	Length		Weight
H41.005.01.01	100	3.94	0.94 kg
H41.005.02.01	50 SX	1.97 SX	0.71 kg
H41.005.02.02	55 DX	2.17 DX	0.71 kg
H41.005.02.03	60 DX	2.36 DX	0.75 kg
H41.005.02.04	65 DX	2.56 DX	0.75 kg
H41.005.02.05	70 DX	2.76 DX	0.75 kg
H41.005.02.06	75 DX	2.95 DX	0.85 kg
H41.005.02.07	80 DX	3.15 DX	0.85 kg
H41.005.02.08	85 DX	3.35 DX	0.85 kg
H41.005.02.09	90 DX	3.54 DX	0.94 kg
H41.005.02.10	95 DX	3.74 DX	0.94 kg
H41.005.03.01	50 DX	1.97 DX	0.71 kg
H41.005.03.02	55 SX	2.17 SX	0.71 kg
H41.005.03.03	60 SX	2.36 SX	0.75 kg
H41.005.03.04	65 SX	2.56 SX	0.75 kg
H41.005.03.05	70 SX	2.76 SX	0.75 kg
H41.005.03.06	75 SX	2.95 SX	0.85 kg
H41.005.03.07	80 SX	3.15 SX	0.85 kg
H41.005.03.08	85 SX	3.35 SX	0.85 kg
H41.005.03.09	90 SX	3.54 SX	0.94 kg
H41.005.03.10	95 SX	3.74 SX	0.94 kg

42Cr: 900-1150 N/mm²

H41.007.0

1000 kN/m max.



Model	Length		Weight
H41.007.01.01	100	3.94	1.12 kg
H41.007.02.01	50 SX	1.97 SX	0.84 kg
H41.007.02.02	55 DX	2.17 DX	0.84 kg
H41.007.02.03	60 DX	2.36 DX	0.90 kg
H41.007.02.04	65 DX	2.56 DX	0.90 kg
H41.007.02.05	70 DX	2.76 DX	0.90 kg
H41.007.02.06	75 DX	2.95 DX	1.01 kg
H41.007.02.07	80 DX	3.15 DX	1.01 kg
H41.007.02.08	85 DX	3.35 DX	1.01 kg
H41.007.02.09	90 DX	3.54 DX	1.12 kg
H41.007.02.10	95 DX	3.74 DX	1.12 kg
H41.007.03.01	50 DX	1.97 DX	0.84 kg
H41.007.03.02	55 SX	2.17 SX	0.84 kg
H41.007.03.03	60 SX	2.36 SX	0.90 kg
H41.007.03.04	65 SX	2.56 SX	0.90 kg
H41.007.03.05	70 SX	2.76 SX	0.90 kg
H41.007.03.06	75 SX	2.95 SX	1.01 kg
H41.007.03.07	80 SX	3.15 SX	1.01 kg
H41.007.03.08	85 SX	3.35 SX	1.01 kg
H41.007.03.09	90 SX	3.54 SX	1.12 kg
H41.007.03.10	95 SX	3.74 SX	1.12 kg

42Cr: 900-1150 N/mm²

H41.010.0

1000 kN/m max.

Model	Length		Weight
H41.010.01.01	100	3.94	1.22 kg
H41.010.02.01	50 SX	1.97 SX	0.92 kg
H41.010.02.02	55 DX	2.17 DX	0.92 kg
H41.010.02.03	60 DX	2.36 DX	0.98 kg
H41.010.02.04	65 DX	2.56 DX	0.98 kg
H41.010.02.05	70 DX	2.76 DX	0.98 kg
H41.010.02.06	75 DX	2.95 DX	1.10 kg
H41.010.02.07	80 DX	3.15 DX	1.10 kg
H41.010.02.08	85 DX	3.35 DX	1.10 kg
H41.010.02.09	90 DX	3.54 DX	1.22 kg
H41.010.02.10	95 DX	3.74 DX	1.22 kg
H41.010.03.01	50 DX	1.97 DX	0.92 kg
H41.010.03.02	55 SX	2.17 SX	0.92 kg
H41.010.03.03	60 SX	2.36 SX	0.98 kg
H41.010.03.04	65 SX	2.56 SX	0.98 kg
H41.010.03.05	70 SX	2.76 SX	0.98 kg
H41.010.03.06	75 SX	2.95 SX	1.10 kg
H41.010.03.07	80 SX	3.15 SX	1.10 kg
H41.010.03.08	85 SX	3.35 SX	1.10 kg
H41.010.03.09	90 SX	3.54 SX	1.22 kg
H41.010.03.10	95 SX	3.74 SX	1.22 kg

42Cr: 900-1150 N/mm²

H41.012.0

1000 kN/m max.

Model	Length		Weight
H41.012.01.01	100	3.94	1.20 kg
H41.012.02.01	50 SX	1.97 SX	0.90 kg
H41.012.02.02	55 DX	2.17 DX	0.90 kg
H41.012.02.03	60 DX	2.36 DX	0.96 kg
H41.012.02.04	65 DX	2.56 DX	0.96 kg
H41.012.02.05	70 DX	2.76 DX	0.96 kg
H41.012.02.06	75 DX	2.95 DX	1.08 kg
H41.012.02.07	80 DX	3.15 DX	1.08 kg
H41.012.02.08	85 DX	3.35 DX	1.08 kg
H41.012.02.09	90 DX	3.54 DX	1.20 kg
H41.012.02.10	95 DX	3.74 DX	1.20 kg
H41.012.03.01	50 DX	1.97 DX	0.90 kg
H41.012.03.02	55 SX	2.17 SX	0.90 kg
H41.012.03.03	60 SX	2.36 SX	0.96 kg
H41.012.03.04	65 SX	2.56 SX	0.96 kg
H41.012.03.05	70 SX	2.76 SX	0.96 kg
H41.012.03.06	75 SX	2.95 SX	1.08 kg
H41.012.03.07	80 SX	3.15 SX	1.08 kg
H41.012.03.08	85 SX	3.35 SX	1.08 kg
H41.012.03.09	90 SX	3.54 SX	1.20 kg
H41.012.03.10	95 SX	3.74 SX	1.20 kg

42Cr: 900-1150 N/mm²

H31.010.2

550 kN/m max.



Model	Length		Weight
H31.010.21.01	100	3.94	1.07 kg
H31.010.22.01	50 SX	1.97 SX	0.80 kg
H31.010.22.02	55 DX	2.17 DX	0.80 kg
H31.010.22.03	60 DX	2.36 DX	0.86 kg
H31.010.22.04	65 DX	2.56 DX	0.86 kg
H31.010.22.05	70 DX	2.76 DX	0.86 kg
H31.010.22.06	75 DX	2.95 DX	0.96 kg
H31.010.22.07	80 DX	3.15 DX	0.96 kg
H31.010.22.08	85 DX	3.35 DX	0.96 kg
H31.010.22.09	90 DX	3.54 DX	1.07 kg
H31.010.22.10	95 DX	3.74 DX	1.07 kg
H31.010.23.01	50 DX	1.97 DX	0.80 kg
H31.010.23.02	55 SX	2.17 SX	0.80 kg
H31.010.23.03	60 SX	2.36 SX	0.86 kg
H31.010.23.04	65 SX	2.56 SX	0.86 kg
H31.010.23.05	70 SX	2.76 SX	0.86 kg
H31.010.23.06	75 SX	2.95 SX	0.96 kg
H31.010.23.07	80 SX	3.15 SX	0.96 kg
H31.010.23.08	85 SX	3.35 SX	0.96 kg
H31.010.23.09	90 SX	3.54 SX	1.07 kg
H31.010.23.10	95 SX	3.74 SX	1.07 kg

42Cr: 900-1150 N/mm²

H31.032.1

1200 kN/m max.



Model	Length		Weight
H31.032.11.01	100	3.94	2.17 kg
H31.032.12.01	50 SX	1.97 SX	1.63 kg
H31.032.12.02	55 DX	2.17 DX	1.63 kg
H31.032.12.03	60 DX	2.36 DX	1.74 kg
H31.032.12.04	65 DX	2.56 DX	1.74 kg
H31.032.12.05	70 DX	2.76 DX	1.74 kg
H31.032.12.06	75 DX	2.95 DX	1.95 kg
H31.032.12.07	80 DX	3.15 DX	1.95 kg
H31.032.12.08	85 DX	3.35 DX	1.95 kg
H31.032.12.09	90 DX	3.54 DX	2.17 kg
H31.032.12.10	95 DX	3.74 DX	2.17 kg
H31.032.13.01	50 DX	1.97 DX	1.63 kg
H31.032.13.02	55 SX	2.17 SX	1.63 kg
H31.032.13.03	60 SX	2.36 SX	1.74 kg
H31.032.13.04	65 SX	2.56 SX	1.74 kg
H31.032.13.05	70 SX	2.76 SX	1.74 kg
H31.032.13.06	75 SX	2.95 SX	1.95 kg
H31.032.13.07	80 SX	3.15 SX	1.95 kg
H31.032.13.08	85 SX	3.35 SX	1.95 kg
H31.032.13.09	90 SX	3.54 SX	2.17 kg
H31.032.13.10	95 SX	3.74 SX	2.17 kg

C45: 560-710 N/mm²

H31.021.0

500 kN/m max.



Model	Length		Weight
H31.021.01.01	100	3.94	1.51 kg
H31.021.02.01	50 SX	1.97 SX	1.13 kg
H31.021.02.02	55 DX	2.17 DX	1.13 kg
H31.021.02.03	60 DX	2.36 DX	1.21 kg
H31.021.02.04	65 DX	2.56 DX	1.21 kg
H31.021.02.05	70 DX	2.76 DX	1.21 kg
H31.021.02.06	75 DX	2.95 DX	1.36 kg
H31.021.02.07	80 DX	3.15 DX	1.36 kg
H31.021.02.08	85 DX	3.35 DX	1.36 kg
H31.021.02.09	90 DX	3.54 DX	1.51 kg
H31.021.02.10	95 DX	3.74 DX	1.51 kg
H31.021.03.01	50 DX	1.97 DX	1.13 kg
H31.021.03.02	55 SX	2.17 SX	1.13 kg
H31.021.03.03	60 SX	2.36 SX	1.21 kg
H31.021.03.04	65 SX	2.56 SX	1.21 kg
H31.021.03.05	70 SX	2.76 SX	1.21 kg
H31.021.03.06	75 SX	2.95 SX	1.36 kg
H31.021.03.07	80 SX	3.15 SX	1.36 kg
H31.021.03.08	85 SX	3.35 SX	1.36 kg
H31.021.03.09	90 SX	3.54 SX	1.51 kg
H31.021.03.10	95 SX	3.74 SX	1.51 kg

C45: 560-710 N/mm²

H31.040.1

750 kN/m max.



Model	Length		Weight
H31.040.11.01	100	3.94	2.66 kg
H31.040.12.01	50 SX	1.97 SX	2.00 kg
H31.040.12.02	55 DX	2.17 DX	2.00 kg
H31.040.12.03	60 DX	2.36 DX	2.13 kg
H31.040.12.04	65 DX	2.56 DX	2.13 kg
H31.040.12.05	70 DX	2.76 DX	2.13 kg
H31.040.12.06	75 DX	2.95 DX	2.39 kg
H31.040.12.07	80 DX	3.15 DX	2.39 kg
H31.040.12.08	85 DX	3.35 DX	2.39 kg
H31.040.12.09	90 DX	3.54 DX	2.66 kg
H31.040.12.10	95 DX	3.74 DX	2.66 kg
H31.040.13.01	50 DX	1.97 DX	2.00 kg
H31.040.13.02	55 SX	2.17 SX	2.00 kg
H31.040.13.03	60 SX	2.36 SX	2.13 kg
H31.040.13.04	65 SX	2.56 SX	2.13 kg
H31.040.13.05	70 SX	2.76 SX	2.13 kg
H31.040.13.06	75 SX	2.95 SX	2.39 kg
H31.040.13.07	80 SX	3.15 SX	2.39 kg
H31.040.13.08	85 SX	3.35 SX	2.39 kg
H31.040.13.09	90 SX	3.54 SX	2.66 kg
H31.040.13.10	95 SX	3.74 SX	2.66 kg

C45: 560-710 N/mm²

H31.016.0

500 kN/m max.

Model	Length		Weight
H31.016.01.01	100	3.94	1.51 kg
H31.016.02.01	50 SX	1.97 SX	1.13 kg
H31.016.02.02	55 DX	2.17 DX	1.13 kg
H31.016.02.03	60 DX	2.36 DX	1.21 kg
H31.016.02.04	65 DX	2.56 DX	1.21 kg
H31.016.02.05	70 DX	2.76 DX	1.21 kg
H31.016.02.06	75 DX	2.95 DX	1.36 kg
H31.016.02.07	80 DX	3.15 DX	1.36 kg
H31.016.02.08	85 DX	3.35 DX	1.36 kg
H31.016.02.09	90 DX	3.54 DX	1.51 kg
H31.016.02.10	95 DX	3.74 DX	1.51 kg
H31.016.03.01	50 DX	1.97 DX	1.13 kg
H31.016.03.02	55 SX	2.17 SX	1.13 kg
H31.016.03.03	60 SX	2.36 SX	1.21 kg
H31.016.03.04	65 SX	2.56 SX	1.21 kg
H31.016.03.05	70 SX	2.76 SX	1.21 kg
H31.016.03.06	75 SX	2.95 SX	1.36 kg
H31.016.03.07	80 SX	3.15 SX	1.36 kg
H31.016.03.08	85 SX	3.35 SX	1.36 kg
H31.016.03.09	90 SX	3.54 SX	1.51 kg
H31.016.03.10	95 SX	3.74 SX	1.51 kg

C45: 560-710 N/mm²

H31.024.0

750 kN/m max.



Model	Length		Weight
H31.024.01.01	100	3.94	1.81 kg
H31.024.02.01	50 SX	1.97 SX	1.36 kg
H31.024.02.02	55 DX	2.17 DX	1.36 kg
H31.024.02.03	60 DX	2.36 DX	1.45 kg
H31.024.02.04	65 DX	2.56 DX	1.45 kg
H31.024.02.05	70 DX	2.76 DX	1.45 kg
H31.024.02.06	75 DX	2.95 DX	1.63 kg
H31.024.02.07	80 DX	3.15 DX	1.63 kg
H31.024.02.08	85 DX	3.35 DX	1.63 kg
H31.024.02.09	90 DX	3.54 DX	1.81 kg
H31.024.02.10	95 DX	3.74 DX	1.81 kg
H31.024.03.01	50 DX	1.97 DX	1.36 kg
H31.024.03.02	55 SX	2.17 SX	1.36 kg
H31.024.03.03	60 SX	2.36 SX	1.45 kg
H31.024.03.04	65 SX	2.56 SX	1.45 kg
H31.024.03.05	70 SX	2.76 SX	1.45 kg
H31.024.03.06	75 SX	2.95 SX	1.63 kg
H31.024.03.07	80 SX	3.15 SX	1.63 kg
H31.024.03.08	85 SX	3.35 SX	1.63 kg
H31.024.03.09	90 SX	3.54 SX	1.81 kg
H31.024.03.10	95 SX	3.74 SX	1.81 kg

C45: 560-710 N/mm²

H31.016.1

500 kN/m max.



Model	Length		Weight
H31.016.11.01	100	3.94	1.55 kg
H31.016.12.01	50 SX	1.97 SX	1.16 kg
H31.016.12.02	55 DX	2.17 DX	1.16 kg
H31.016.12.03	60 DX	2.36 DX	1.24 kg
H31.016.12.04	65 DX	2.56 DX	1.24 kg
H31.016.12.05	70 DX	2.76 DX	1.24 kg
H31.016.12.06	75 DX	2.95 DX	1.40 kg
H31.016.12.07	80 DX	3.15 DX	1.40 kg
H31.016.12.08	85 DX	3.35 DX	1.40 kg
H31.016.12.09	90 DX	3.54 DX	1.55 kg
H31.016.12.10	95 DX	3.74 DX	1.55 kg
H31.016.13.01	50 DX	1.97 DX	1.16 kg
H31.016.13.02	55 SX	2.17 SX	1.16 kg
H31.016.13.03	60 SX	2.36 SX	1.24 kg
H31.016.13.04	65 SX	2.56 SX	1.24 kg
H31.016.13.05	70 SX	2.76 SX	1.24 kg
H31.016.13.06	75 SX	2.95 SX	1.40 kg
H31.016.13.07	80 SX	3.15 SX	1.40 kg
H31.016.13.08	85 SX	3.35 SX	1.40 kg
H31.016.13.09	90 SX	3.54 SX	1.55 kg
H31.016.13.10	95 SX	3.74 SX	1.55 kg

C45: 560-710 N/mm²

H31.005.0

250 kN/m max.



Model	Length		Weight
H31.005.01.01	100	3.94	1.07 kg
H31.005.02.01	50 SX	1.97 SX	0.80 kg
H31.005.02.02	55 DX	2.17 DX	0.80 kg
H31.005.02.03	60 DX	2.36 DX	0.86 kg
H31.005.02.04	65 DX	2.56 DX	0.86 kg
H31.005.02.05	70 DX	2.76 DX	0.86 kg
H31.005.02.06	75 DX	2.95 DX	0.96 kg
H31.005.02.07	80 DX	3.15 DX	0.96 kg
H31.005.02.08	85 DX	3.35 DX	0.96 kg
H31.005.02.09	90 DX	3.54 DX	1.07 kg
H31.005.02.10	95 DX	3.74 DX	1.07 kg
H31.005.03.01	50 DX	1.97 DX	0.80 kg
H31.005.03.02	55 SX	2.17 SX	0.80 kg
H31.005.03.03	60 SX	2.36 SX	0.86 kg
H31.005.03.04	65 SX	2.56 SX	0.86 kg
H31.005.03.05	70 SX	2.76 SX	0.86 kg
H31.005.03.06	75 SX	2.95 SX	0.96 kg
H31.005.03.07	80 SX	3.15 SX	0.96 kg
H31.005.03.08	85 SX	3.35 SX	0.96 kg
H31.005.03.09	90 SX	3.54 SX	1.07 kg
H31.005.03.10	95 SX	3.74 SX	1.07 kg

42Cr: 900-1150 N/mm²

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

H31.007.0

500 kN/m max.



Model	Length		Weight
H31.007.01.01	100	3.94	1.24 kg
H31.007.02.01	50 SX	1.97 SX	0.93 kg
H31.007.02.02	55 DX	2.17 DX	0.93 kg
H31.007.02.03	60 DX	2.36 DX	0.99 kg
H31.007.02.04	65 DX	2.56 DX	0.99 kg
H31.007.02.05	70 DX	2.76 DX	0.99 kg
H31.007.02.06	75 DX	2.95 DX	1.12 kg
H31.007.02.07	80 DX	3.15 DX	1.12 kg
H31.007.02.08	85 DX	3.35 DX	1.12 kg
H31.007.02.09	90 DX	3.54 DX	1.24 kg
H31.007.02.10	95 DX	3.74 DX	1.24 kg
H31.007.03.01	50 DX	1.97 DX	0.93 kg
H31.007.03.02	55 SX	2.17 SX	0.93 kg
H31.007.03.03	60 SX	2.36 SX	0.99 kg
H31.007.03.04	65 SX	2.56 SX	0.99 kg
H31.007.03.05	70 SX	2.76 SX	0.99 kg
H31.007.03.06	75 SX	2.95 SX	1.12 kg
H31.007.03.07	80 SX	3.15 SX	1.12 kg
H31.007.03.08	85 SX	3.35 SX	1.12 kg
H31.007.03.09	90 SX	3.54 SX	1.24 kg
H31.007.03.10	95 SX	3.74 SX	1.24 kg

42Cr: 900-1150 N/mm²

H31.007.2

500 kN/m max.



Model	Length		Weight
H31.007.21.01	100	3.94	1.23 kg
H31.007.22.01	50 SX	1.97 SX	0.92 kg
H31.007.22.02	55 DX	2.17 DX	0.92 kg
H31.007.22.03	60 DX	2.36 DX	0.98 kg
H31.007.22.04	65 DX	2.56 DX	0.98 kg
H31.007.22.05	70 DX	2.76 DX	0.98 kg
H31.007.22.06	75 DX	2.95 DX	1.11 kg
H31.007.22.07	80 DX	3.15 DX	1.11 kg
H31.007.22.08	85 DX	3.35 DX	1.11 kg
H31.007.22.09	90 DX	3.54 DX	1.23 kg
H31.007.22.10	95 DX	3.74 DX	1.23 kg
H31.007.23.01	50 DX	1.97 DX	0.92 kg
H31.007.23.02	55 SX	2.17 SX	0.92 kg
H31.007.23.03	60 SX	2.36 SX	0.98 kg
H31.007.23.04	65 SX	2.56 SX	0.98 kg
H31.007.23.05	70 SX	2.76 SX	0.98 kg
H31.007.23.06	75 SX	2.95 SX	1.11 kg
H31.007.23.07	80 SX	3.15 SX	1.11 kg
H31.007.23.08	85 SX	3.35 SX	1.11 kg
H31.007.23.09	90 SX	3.54 SX	1.23 kg
H31.007.23.10	95 SX	3.74 SX	1.23 kg

42Cr: 900-1150 N/mm²

H31.013.0

500 kN/m max.

Model	Length		Weight
H31.013.01.01	100	3.94	1.77 kg
H31.013.02.01	50 SX	1.97 SX	1.33 kg
H31.013.02.02	55 DX	2.17 DX	1.33 kg
H31.013.02.03	60 DX	2.36 DX	1.42 kg
H31.013.02.04	65 DX	2.56 DX	1.42 kg
H31.013.02.05	70 DX	2.76 DX	1.42 kg
H31.013.02.06	75 DX	2.95 DX	1.59 kg
H31.013.02.07	80 DX	3.15 DX	1.59 kg
H31.013.02.08	85 DX	3.35 DX	1.59 kg
H31.013.02.09	90 DX	3.54 DX	1.77 kg
H31.013.02.10	95 DX	3.74 DX	1.77 kg
H31.013.03.01	50 DX	1.97 DX	1.33 kg
H31.013.03.02	55 SX	2.17 SX	1.33 kg
H31.013.03.03	60 SX	2.36 SX	1.42 kg
H31.013.03.04	65 SX	2.56 SX	1.42 kg
H31.013.03.05	70 SX	2.76 SX	1.42 kg
H31.013.03.06	75 SX	2.95 SX	1.59 kg
H31.013.03.07	80 SX	3.15 SX	1.59 kg
H31.013.03.08	85 SX	3.35 SX	1.59 kg
H31.013.03.09	90 SX	3.54 SX	1.77 kg
H31.013.03.10	95 SX	3.74 SX	1.77 kg

C45: 560-710 N/mm²

H31.012.0

500 kN/m max.

Model	Length		Weight
H31.012.01.01	100	3.94	1.76 kg
H31.012.02.01	50 SX	1.97 SX	1.32 kg
H31.012.02.02	55 DX	2.17 DX	1.32 kg
H31.012.02.03	60 DX	2.36 DX	1.41 kg
H31.012.02.04	65 DX	2.56 DX	1.41 kg
H31.012.02.05	70 DX	2.76 DX	1.41 kg
H31.012.02.06	75 DX	2.95 DX	1.58 kg
H31.012.02.07	80 DX	3.15 DX	1.58 kg
H31.012.02.08	85 DX	3.35 DX	1.58 kg
H31.012.02.09	90 DX	3.54 DX	1.76 kg
H31.012.02.10	95 DX	3.74 DX	1.76 kg
H31.012.03.01	50 DX	1.97 DX	1.32 kg
H31.012.03.02	55 SX	2.17 SX	1.32 kg
H31.012.03.03	60 SX	2.36 SX	1.41 kg
H31.012.03.04	65 SX	2.56 SX	1.41 kg
H31.012.03.05	70 SX	2.76 SX	1.41 kg
H31.012.03.06	75 SX	2.95 SX	1.58 kg
H31.012.03.07	80 SX	3.15 SX	1.58 kg
H31.012.03.08	85 SX	3.35 SX	1.58 kg
H31.012.03.09	90 SX	3.54 SX	1.76 kg
H31.012.03.10	95 SX	3.74 SX	1.76 kg

C45: 560-710 N/mm²

H31.006.0

350 kN/m max.

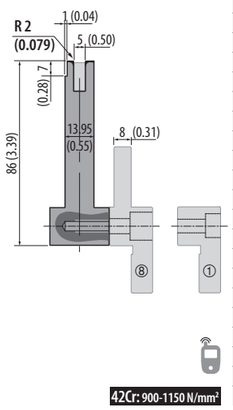

Model	Length		Weight
H31.006.01.01	100	3.94	1.08 kg
H31.006.02.01	50 SX	1.97 SX	0.81 kg
H31.006.02.02	55 DX	2.17 DX	0.81 kg
H31.006.02.03	60 DX	2.36 DX	0.86 kg
H31.006.02.04	65 DX	2.56 DX	0.86 kg
H31.006.02.05	70 DX	2.76 DX	0.86 kg
H31.006.02.06	75 DX	2.95 DX	0.97 kg
H31.006.02.07	80 DX	3.15 DX	0.97 kg
H31.006.02.08	85 DX	3.35 DX	0.97 kg
H31.006.02.09	90 DX	3.54 DX	1.08 kg
H31.006.02.10	95 DX	3.74 DX	1.08 kg
H31.006.03.01	50 DX	1.97 DX	0.81 kg
H31.006.03.02	55 SX	2.17 SX	0.81 kg
H31.006.03.03	60 SX	2.36 SX	0.86 kg
H31.006.03.04	65 SX	2.56 SX	0.86 kg
H31.006.03.05	70 SX	2.76 SX	0.86 kg
H31.006.03.06	75 SX	2.95 SX	0.97 kg
H31.006.03.07	80 SX	3.15 SX	0.97 kg
H31.006.03.08	85 SX	3.35 SX	0.97 kg
H31.006.03.09	90 SX	3.54 SX	1.08 kg
H31.006.03.10	95 SX	3.74 SX	1.08 kg

42Cr: 900-1150 N/mm²

H31.060.0

1500 kN/m max.

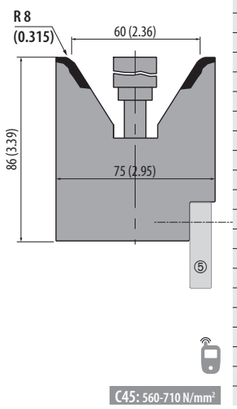

Model	Length		Weight
H31.060.01.01	100	3.94	3.76 kg
H31.060.02.01	50 SX	1.97 SX	2.82 kg
H31.060.02.02	55 DX	2.17 DX	2.82 kg
H31.060.02.03	60 DX	2.36 DX	3.01 kg
H31.060.02.04	65 DX	2.56 DX	3.01 kg
H31.060.02.05	70 DX	2.76 DX	3.01 kg
H31.060.02.06	75 DX	2.95 DX	3.38 kg
H31.060.02.07	80 DX	3.15 DX	3.38 kg
H31.060.02.08	85 DX	3.35 DX	3.38 kg
H31.060.02.09	90 DX	3.54 DX	3.76 kg
H31.060.02.10	95 DX	3.74 DX	3.76 kg
H31.060.03.01	50 DX	1.97 DX	2.82 kg
H31.060.03.02	55 SX	2.17 SX	2.82 kg
H31.060.03.03	60 SX	2.36 SX	3.01 kg
H31.060.03.04	65 SX	2.56 SX	3.01 kg
H31.060.03.05	70 SX	2.76 SX	3.01 kg
H31.060.03.06	75 SX	2.95 SX	3.38 kg
H31.060.03.07	80 SX	3.15 SX	3.38 kg
H31.060.03.08	85 SX	3.35 SX	3.38 kg
H31.060.03.09	90 SX	3.54 SX	3.76 kg
H31.060.03.10	95 SX	3.74 SX	3.76 kg

H31.090.01.01

1500 kN/m max.

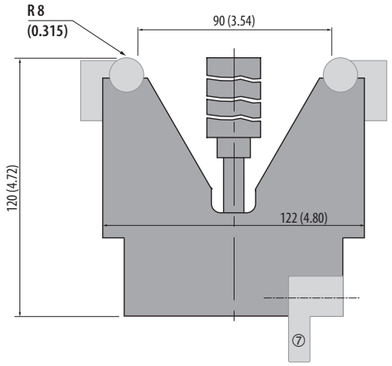

Model	Length		Weight
H31.090.01.01	100	3.94	8.15 kg

C45: 560-710 N/mm²

H31.110.01.01

1500 kN/m max.

Model	Length		Weight
H31.110.01.01	100	3.94	8.83 kg

C45: 560-710 N/mm²

7 RX

ROLLERI®

ROLLERI **DIES ROLLA-V**

Content Explanation	190 - 191
Model 1	192
Model 2	193
Model 2.5	193
Model 3	194
Model 4	194
Adjustable Dies	195
Hemming- and Joggle Tools	195

Compatibility

- **RVP Dies (Models 1, 2, 3)** are **compatible** with press brake machines (60 mm / 2.36 in die holder) from: ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Darley, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, LFK, MVD, Newton, Prima Power, Promecam, Rico, Safan, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei, Ysd, etc.
- **RVS Dies (Models 1, 2, 3)** are **compatible** with press brake machines (14 mm / 0.55 in pins) from: Amada Single V style
- **RVT Dies (Models 1, 2, 3)** are **compatible** with press brake machines (12.7 mm / 0.50 in / 13 mm / 0.51 in pins) from: Bystronic, Hämmerle, Beyeler, Edwards, Safan, SMD, Trumpf
- **RVT90 Dies (Models 1, 2, 3)** are **compatible** with press brakes machines (12.7 mm / 0.50 in pins) from: LVD
- **RVM Dies (Models 2.5, 3, 4)** are **compatible** with all press brake machines (various die holders)
- all dies are compatible on other press brakes machines with the means of adapter-systems or customized die holders.

Our Advantages – Your Convenience

- high precision grounded
- Interchangability guaranteed
- exact Parallelism
- avoiding bending marks on the sheet metals
- minimum borders bending mark free
- no tool contamination throughout the bending of galvanized sheet metal or aluminum
- extremely short flanges
- less tool exchange
- ideal for diagonal or tapered edges

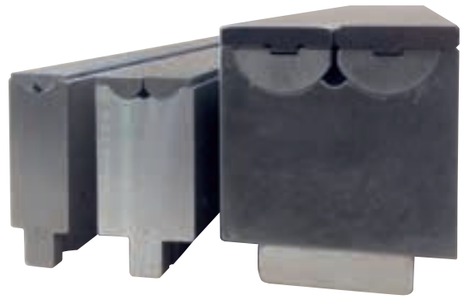

Material

The raw material is obtained from qualified suppliers which compose the chemical formulas according to international standards. Therefore, guaranteeing high resilience and tensile strength.

	Model	Material Type	Hardness of the material and the tool body	Hardness of the operating surfaces after induction hardening
Body	1 / 2 / 2.5 / 3 / 4	42CrMo4	1100-1200 N/mm²	50 - 55 HRC
Inserts	1	Toolox 44	1450 N/mm²	through hardened 44 HRC
Inserts	2 / 2.5 / 3 / 4	Toolox 33	1100 N/mm²	55 - 58 HRC

- Specifications for the maximum press force kN/m are indicated as such, **1 t = 10 kN**.

	Equivalent V size mm (in)	Material Thickness mm (in)		min. outside flange mm (in)		needed press force (kN)	max. tool load (kN/m)	min. bending angle
Model 1 Max. recommended thickness =1.5 mm (0.06 in) (2.0 mm / 0.08 in possible)	8 (0.31)	0.70	(0.03)	3.0	(0.12)	60	1000	40°
		1.10	(0.04)	3.9	(0.15)	110	1000	35°
		1.50	(0.06)	4.2	(0.17)	260	1000	35°
Model 2 Max. recommended thickness =3.0 mm (0.12 in) (4.0 mm / 0.15 in possible)	15 (0.59)	2.00	(0.08)	8.5	(0.33)	200	1500	59°
		3.00	(0.12)	9.3	(0.37)	460	1500	46°
		3.20	(0.13)	9.3	(0.37)	550	1500	47°
Model 2.5 Max. recommended thickness =5.0 mm (0.20 in) (6.35 mm / 0.24 in possible)	28 (1.10)	3.00	(0.12)	18.7	(0.74)	230	2000	67°
		4.00	(0.16)	18.7	(0.74)	450	2000	60°
		5.00	(0.20)	18.7	(0.74)	770	2000	57°
		6.00	(0.24)	18.7	(0.74)	1200	2000	51°
Model 3 Max. recommended thickness =6.3 mm (0.25 in) (8.0 mm / 0.31 in possible)	38 (1.50)	4.00	(0.16)	22.5	(0.89)	270	2500	47°
		6.00	(0.24)	22.5	(0.89)	800	2500	50°

Tool lengths and sectioning

Standard

Segmented tools are delivered in complete sets. Single pieces are also available!

More lengths and sectionings are possible upon request.

500 mm (19.68 in)

200 mm (7.87 in)

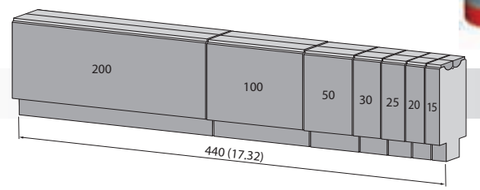

Model 1, 440 mm (17.32 in) segmented
(7 segments)

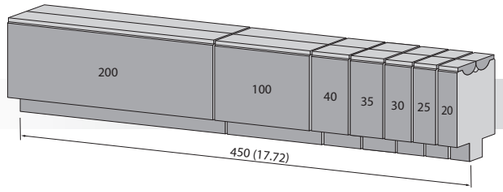

Model 2, 450 mm (17.72 in) segmented
(7 segments)

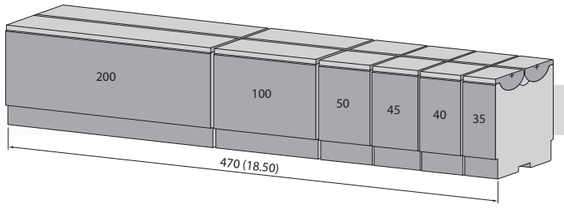

Model 2.5, 470 mm (18.50 in) segmented
(6 segments)

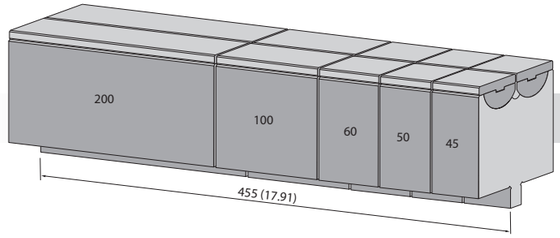

Model 3, 455 mm (17.91 in) segmented
(5 segments)

Model 1

RVP60-1

1000 kN/m max.

NEW



500 mm	16.68 in	6.9 kg
440 mm segmented	17.32 in segmented	6.1 kg

42Cr: 1100-1200 N/mm²

on stock

RVS80-1

1000 kN/m max.

NEW



500 mm	16.68 in	6.3 kg
440 mm segmented	17.32 in segmented	5.8 kg

42Cr: 1100-1200 N/mm²

on stock

RVT55-1

1000 kN/m max.

NEW



500 mm	16.68 in	5.5 kg
440 mm segmented	17.32 in segmented	5.0 kg

42Cr: 1100-1200 N/mm²

on stock

RVT90-1

1000 kN/m max.

NEW



500 mm	16.68 in	8.5 kg
440 mm segmented	17.32 in segmented	7.8 kg

42Cr: 1100-1200 N/mm²

on stock

RVT100-1

1000 kN/m max.

NEW



500 mm	16.68 in	9.4 kg
440 mm segmented	17.32 in segmented	8.6 kg

42Cr: 1100-1200 N/mm²

on stock

Ideal for thick material!

Making the impossible, possible ...

ROLLERI® PROFESSIONAL BENDING

Model 2

RVP65-2

1500 kN/m max.

NEW



500 mm	16.68 in	7.9 kg
450 mm segmented	17.72 in segmented	7.4 kg

42Cr: 1100-1200 N/mm²

on stock

RVS80-2

1500 kN/m max.

NEW



500 mm	16.68 in	8.3 kg
450 mm segmented	17.72 in segmented	7.8 kg

42Cr: 1100-1200 N/mm²

on stock

RVT60-2

1500 kN/m max.

NEW



500 mm	16.68 in	7.9 kg
450 mm segmented	17.72 in segmented	7.4 kg

42Cr: 1100-1200 N/mm²

on stock

RVT90-2

1500 kN/m max.

NEW



500 mm	16.68 in	11.3 kg
450 mm segmented	17.72 in segmented	10.6 kg

42Cr: 1100-1200 N/mm²

on stock

RVT100-2

1500 kN/m max.

NEW



500 mm	16.68 in	12.4 kg
450 mm segmented	17.72 in segmented	11.7 kg

42Cr: 1100-1200 N/mm²

on stock

Model 2.5

RVM2.5

2000 kN/m max.

NEW



500 mm	16.68 in	22.0 kg
470 mm segmented	18.50 in segmented	21.0 kg

42Cr: 1100-1200 N/mm²

on stock

Rolleri Videos

Use and application of Rolla-V dies

www.rolleritools.com/videos/rolla-v

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Model 3

RVP100-3

2500 kN/m max.

NEW



500 mm	16.68 in	28.8 kg
455 mm segmented	17.91 in segmented	26.2 kg

42Cr: 1100-1200 N/mm²

on stock

RVM70-3

2500 kN/m max.

NEW



500 mm	16.68 in	20.6 kg
455 mm segmented	17.91 in segmented	18.7 kg

42Cr: 1100-1200 N/mm²

on stock

Possible Die Holders:
- 60 mm (2.36 in)
- 13 mm (0.51 in) pin
- 12.7 mm (0.50 in) pin
- 12.8 mm (0.50 in) offset pin

RVT100-3

2500 kN/m max.

NEW



500 mm	16.68 in	30.9 kg
455 mm segmented	17.91 in segmented	28.5 kg

42Cr: 1100-1200 N/mm²

on stock

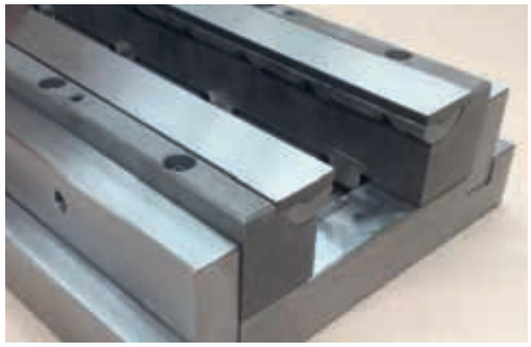

Model 4

Our Advantages – Your Convenience

The **model 4 tools** and the **adjustable dies** are for bending thick material and large radii. Material specifications vary greatly, therefore no specific data can be given.

- Minimum borders are highly dependant on the squareness of the component.
- Enlargement and hole distortion will be greatly reduced, however will be influenced depending on the type of material
- Radius bending is strongly influenced by the elastic return of specific material and flange-size.

For advice please contact us!

RVM90-4

3000 kN/m max.

NEW

500 mm	16.68 in	56.6 kg
200 mm	7.87 in	22.7 kg

42Cr: 1100-1200 N/mm²

on stock

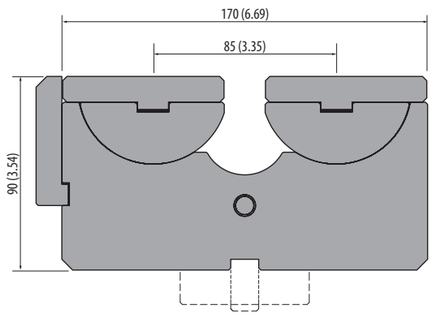

Possible Die Holders:
- 60 mm (2.36 in)
- 13 mm (0.51 in) pin
- 12.7 mm (0.50 in) pin
- 12.8 mm (0.50 in) offset pin

Adjustable Dies

ROLLERI® PROFESSIONAL BENDING

Our advantages – Your Convenience

- bending possible up to the thickness of 30 mm (1.18 in)
- inserts hardened
- no bending marks
- adjustable openings
  RVPV3 = 39-94 mm (1.54-3.70 in)
  RVHD3 = 39-118 mm (1.54-4.65 in)
  RVPV4 = 69-180 mm (2.72-7.09 in)
- bends laser-cut sheet metal without damaging the tool
- exact inner radius

RVPV3

2500 kN/m max.

NEW

42Cr: 1100-1200 N/mm²

on stock

500 mm	16.68 in	50.0 kg
200 mm	7.87 in	20.0 kg



RVHD3

3500 kN/m max.

NEW

42Cr: 1100-1200 N/mm²

on stock

500 mm	16.68 in	98.0 kg
200 mm	7.87 in	38.1 kg

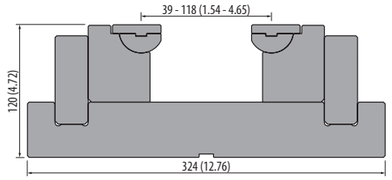

RVHD4

4000 kN/m max.

NEW

42Cr: 1100-1200 N/mm²

on stock

500 mm	16.68 in	200.0 kg
200 mm	7.87 in	80.0 kg

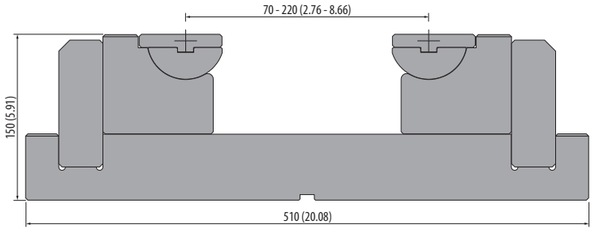



- V-Bending
- flat inserts



- Radius-Bending
- flat inserts



- Conical Bending
- flat inserts



- Radius-Overbending
- concave inserts



- U-Bending
- V-inserts

Hemming- and Z-Tools

Hemming Tool

NEW

per piece	Price upon request

Production according to your specifications

42Cr: 1100-1200 N/mm²



Joggle Tool

NEW

per piece	Price upon request

Production according to your specifications

42Cr: 1100-1200 N/mm²



on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROLLERI®

ROLLERI **CLAMPING SYSTEMS**

Content Explanation	198
Intermediates	199
Clamps	200 - 201
ROL100-System for Punches Rolleri Type R1	202 - 203
ROL1-System for Punches Rolleri Type R1	204 - 205
ROL4-System for Punches Rolleri Type R1	205
W-ROL PN-System for Punches Rolleri Type R2	206
ROL3-System for Punches Rolleri Type R3 and RX	207
ROL2-System for Dies Rolleri Type R1	208 - 209
Movable Die Clamps for Dies Rolleri Type R1	209

Content Explanation

Standard-Clamping

horizontal

- for **Punches Rolleri Type R1**
- made of: Tensioning device + intermediate
- dual sided clamping (KDS-System)
- **horizontal tool exchange**
- see pages 199-201

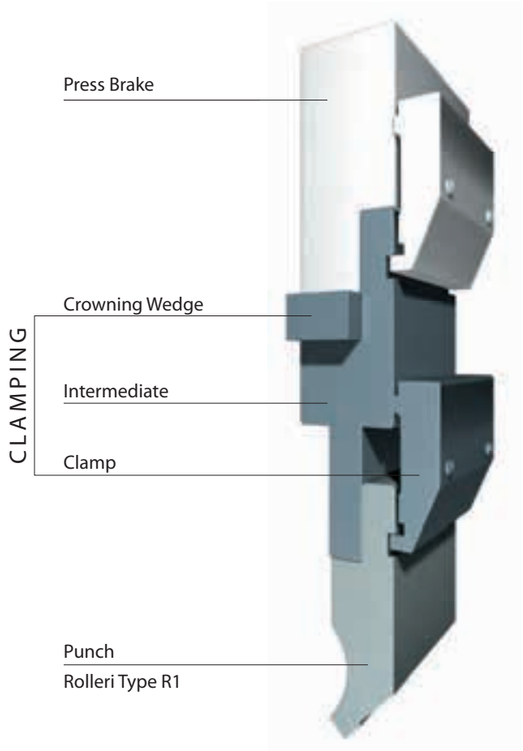

ROL100 Clamping

NEW

vertical

- for **Punches Rolleri Type R1**
- **vertical tool exchange**
- can be used **without modifying** Punches Rolleri Type R1
- safety guard
- including selectable intermediates
- manual and pneumatic models available
- see pages 202-203

ROL1 Clamping

vertical

- for **Punches Rolleri Type R1**
- **vertical tool exchange**
- **modification necessary:** Punches Rolleri Type R1 are equipped with spring-loaded balls
- safety guard
- including selectable intermediates
- manual, pneumatic and hydraulic models available
- dual sided clamping (KDS-System)
- see pages 204-205

ROL4 Clamping

horizontal

- for **Punches Rolleri Type R1**
- **horizontal tool exchange**
- can be used **without modifying** Punches Rolleri Type R1
- safety guard
- including selectable intermediates
- manual and hydraulic models available
- dual sided clamping integrated
- see pages 205

W-ROL PN Clamping

vertical horizontal

- for **Punches Rolleri Type R2**
- **vertical tool exchange** with ROL1-System and QuickLock-System
- Punches with Safety-Pins are inserted **horizontal**
- safety guard
- pneumatic model available only
- see page 206

ROL3 Clamping

vertical horizontal

- for **Punches Rolleri Type R3/RX**
- **vertical or horizontal tool exchange**
- custom manufacturing
- safety guard
- hydraulic model available only
- see page 207

ROL2 Clamping

- for **Dies Rolleri Type R1**
- manual, pneumatic and hydraulic models available
- see pages 208-209

Movable Die Clamps

- for **Dies Rolleri Type R1**
- manual model available only
- see page 209

ROLLERI® PROFESSIONAL BENDING

AD4

1000 kN/m max.

150 mm	5.91 in	1.8 kg



without wedge crowning

C45: 560-710 N/mm²

on stock

Punch extension

INT100 FISSO

1000 kN/m max.

150 mm	5.91 in	4.0 kg

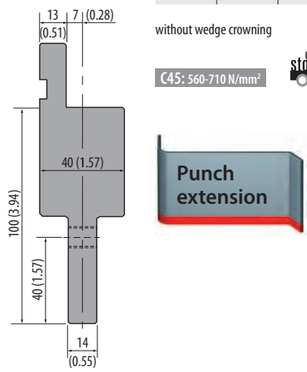

without wedge crowning

C45: 560-710 N/mm²

on stock

Punch extension

INT100

1000 kN/m max.

150 mm	5.91 in	3.5 kg

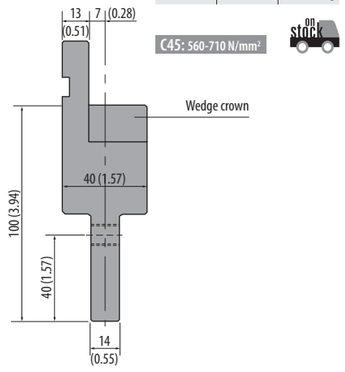

C45: 560-710 N/mm²

on stock

INT120-40

1000 kN/m max.

150 mm	5.91 in	5.2 kg

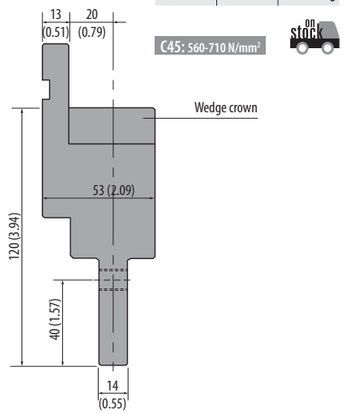

C45: 560-710 N/mm²

on stock

INT120

1000 kN/m max.

150 mm	5.91 in	4.5 kg

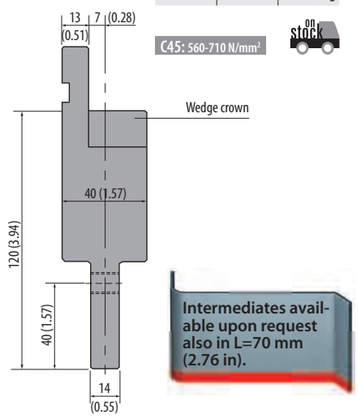

C45: 560-710 N/mm²

on stock

Intermediates available upon request also in L=70 mm (2.76 in).

INT150-40

1000 kN/m max.

150 mm	5.91 in	8.0 kg

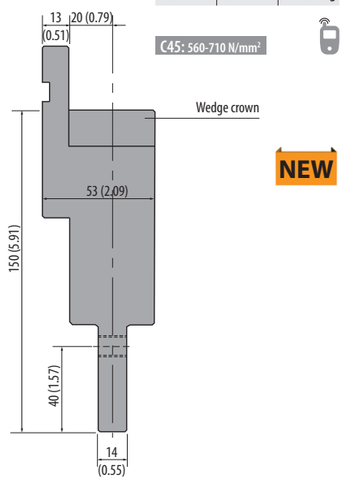

C45: 560-710 N/mm²

NEW

INT150

1000 kN/m max.

150 mm	5.91 in	5.9 kg

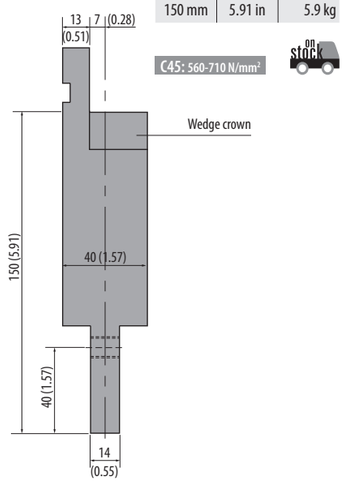

C45: 560-710 N/mm²

on stock

INT120-40-HD

1600 kN/m max.

150 mm	5.91 in	5.2 kg

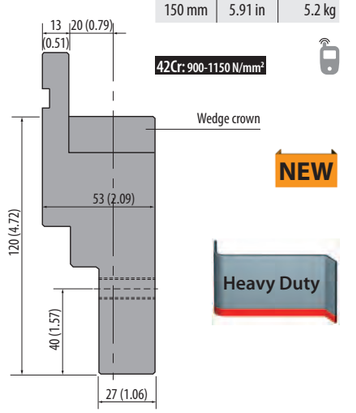

42Cr: 900-1150 N/mm²

NEW

Heavy Duty

INT120-HD

1600 kN/m max.

150 mm	5.91 in	4.5 kg

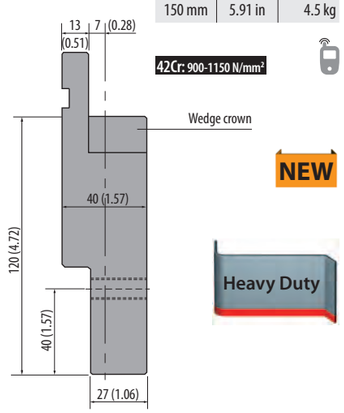

42Cr: 900-1150 N/mm²

NEW

Heavy Duty

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Our Advantages – Your Convenience

- **Rapid Clamping Systems** allow a fast horizontal tool exchange
- **Plastic Pressure Strip** improves the clamping especially with short tool pieces.

needed clamps	Length of press brake
4 pieces	835 mm (32.87 in)
6 pieces	1250 mm (49.21 in)
11 pieces	2100 mm (82.68 in)
14 pieces	2600 mm (102.36 in)
16 pieces	3100 mm (122.05 in)
21 pieces	4100 mm (161.42 in)

ST50 / ST50R / STG50

ST50	0.70 kg
ST50R	0.50 kg
STG50	0.70 kg

L=150 mm (5.91 in)

Fe37: 370-470 N/mm²

on stock

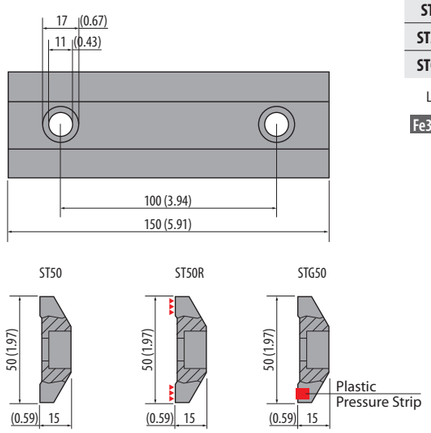

ST60 / ST60R / STG60

ST60	0.80 kg
ST60R	0.85 kg
STG60	0.80 kg

L=150 mm (5.91 in)

Fe37: 370-470 N/mm²

on stock

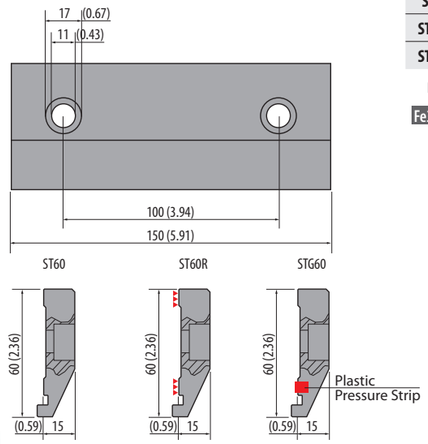

Compatible Intermediates on page 199

STL60 / STL60R / STLG60

STL60	1.00 kg
STL60R	0.80 kg
STLG60	1.00 kg

L=150 mm (5.91 in)

Fe37: 370-470 N/mm²

on stock

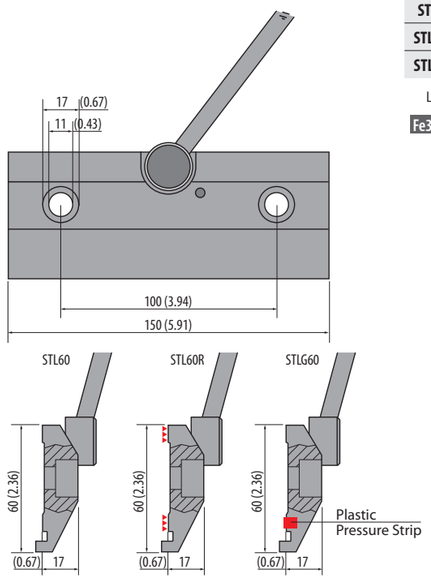

STX60 / STX60R / STXG60

STX60	0.85 kg
STX60R	0.50 kg
STXG60	1.00 kg

L=150 mm (5.91 in)

Fe37: 370-470 N/mm²

on stock

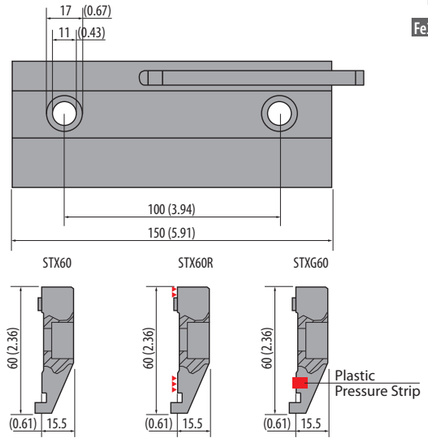

KDS

per piece 0.5 kg

includes a tensioning device without intermediates

Fe37: 370-470 N/mm²

on stock

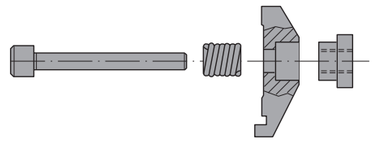

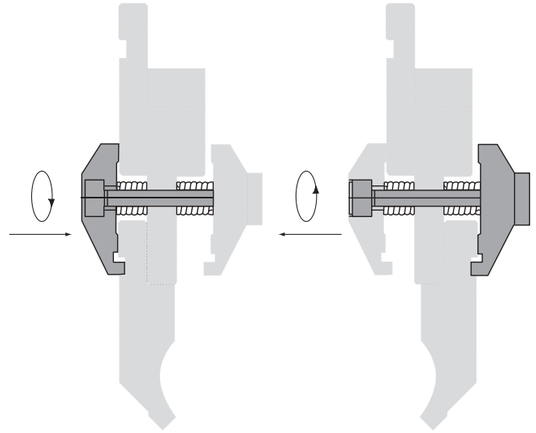

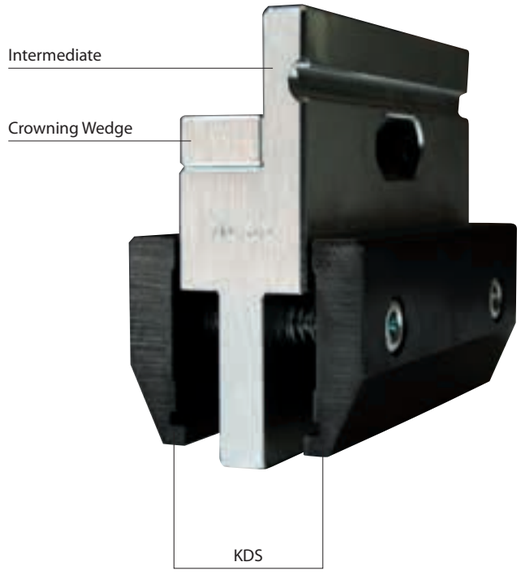

ROL1 CLAMP3 – manual – hydraulic – pneumatic

Compatible for Standard Punches Rolleri Type R1

horizontal

Model	with Intermediate
ROL1 CLAMP3 manual	INT100
	INT120
	INT150
	INT100 FISSO
	INT120-40

ROL1 CLAMP3 manual
without Intermediate

horizontal

Model	with Intermediate
ROL1 CLAMP3 hydraulic	INT100
	INT120
	INT150
	INT100 FISSO
	INT120-40

horizontal

Model	with Intermediate
ROL1 CLAMP3 pneumatic	INT120
	INT150

on stock L=150 mm (5.91 in)
horizontal tool exchange
including selectable intermediates

Rolleri Videos

Application of Clamping System ROL1 CLAMP3: **www.rolleritools.com/videos/rol1-clamp3**

9

… the newest innovation from our Research and Development Department

- fast **vertical** tool exchange for all Punches Rolleri Type R1
- can be used without modifying Punches Rolleri Type R1
- safe and fast tool exchange
- significant savings on your setup costs
- no falling out of tools
- available in manual and pneumatic models
- Mounting:
  Simply from the bottom into the housing, tighten – DONE!
- Disassembly:
  Untighten, gently lift tool and remove downwards.
- Easy to mount on your press brake.
  A conversion of the press brake is not necessary.
- For Press Brake Machines and Punches Rolleri Type R1:
  (ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Darley, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, LFK, MVD, Newton, Prima Power, Promecam, Rico, Safan, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei, Ysd, etc.)

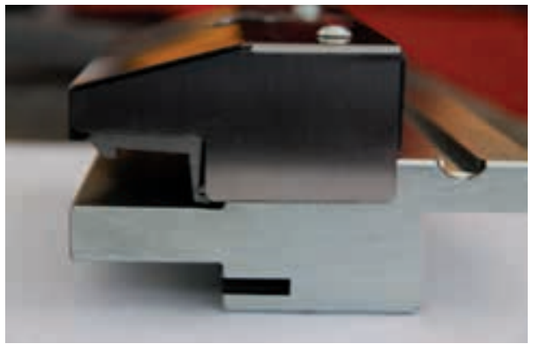

Articles on stock – Please note that delivery time varies according to your location.

R1 ROLLERI CLAMPING SYSTEMS
ROL100-System for Punches Rolleri Type R1

ROLLERI® PROFESSIONAL BENDING

ROL100 – manual

NEW

Model	with Intermediate
ROL100 manual	INT100
	INT120
	INT150
	INT100 FISSO

vertical

L=150 mm (5.91 in)
vertical tool exchange
including selectable intermediates

on stock

The ROL100-System is suited for Standard-Punches. There are no modifications necessary!

ROL100 – pneumatic

NEW

Model	with Intermediate
ROL100 pneumatic	INT100
	INT120
	INT150
	INT100 FISSO

vertical

L=150 mm (5.91 in)
vertical tool exchange
including selectable intermediates

on stock

Pneumatic connection

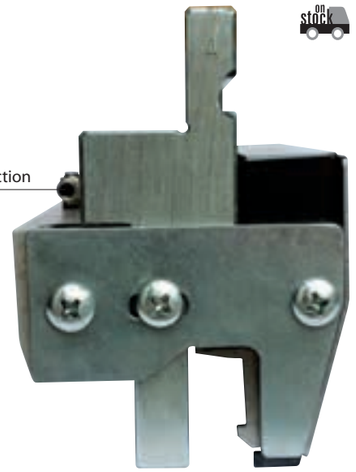

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROL1-System for Punches Rolleri Type R1

In order to use the ROL1 System, the punches are modified and equipped with spring-loaded balls.

ROL1 can be used on all press brakes with standard tang intermediates of Rolleri Type R1.

Our Advantages – Your Convenience

- **vertical clamping** of tools is possible on press brakes thanks to a row of **spring-loaded balls** which are also used as **safety guards** to prevent the falling out of tools.
- complete mechanic functioning fast clamping system for press brake machines.
- Productivity and Versatility of the press brake machines will be increased.
- Significant **reduction in the set-up times** when changing tools

The system was designed on a press brake machine setup, that allows a maximal distance of 70 mm from the correlating clamping systems (upper and lower). The minimal number of spring-loaded balls in the clamping system should be considered, if the distance is larger than 70 mm. The minimal amount of spring-loaded balls,depends on the weight and the length of each tool.

ROL1 CLAMP1 – manual

Model	with Intermediate	
ROL1 CLAMP1	INT100	L=150 mm (5.91 in) vertical tool exchange **including selectable intermediates**
	INT120	
	INT150	
	INT100 FISSO	
	INT120-40	

vertical — on stock

ROL1 CLAMP1
without Intermediate

ROL1 PN CLAMP1 – pneumatic

Model	with Intermediate	
ROL1 PN CLAMP1	INT120	L=150 mm (5.91 in) vertical tool exchange **including selectable intermediates**
	INT150	

vertical — on stock

Mounting example

Rolleri Videos

Application of Clamping Systems ROL1 CLAMP1: **www.rolleritools.com/videos/rol1-clamp1**

ROL1-System for Punches Rolleri Type R1

ROLLERI® PROFESSIONAL BENDING

ROL1 HYD CLAMP1 – hydraulic

Model	with Intermediate	
ROL1 HYD CLAMP1	INT100	L=150 mm (5.91 in) vertical tool exchange **including selectable intermediates**
	INT120	
	INT150	
	INT100 FISSO	
	INT120-40	

vertical — on stock

ROL1 KDS

Model	with Intermediate			
ROL1 KDS	INT100	with Clamp1	with Clamp3	L=150 mm vertical tool exchange **including selectable intermediates**
	INT120			
	INT150			
	INT100 FISSO	vertical	horizontal	
	INT120-40			

on stock

Detailed information about intermediates on page 199

ROL4-System for Punches Rolleri Type R1

ROL4 – manual

Model	with Intermediate	
ROL4 manual	INT100	L=150 mm (5.91 in) horizontal tool exchange **including selectable intermediates integrated KDS-System**
	INT120	
	INT150	
	INT100 FISSO	

horizontal — on stock

ROL4 – hydraulic

Model	with Intermediate	
ROL4 hydraulic	INT100	L=150 mm (5.91 in) horizontal tool exchange **including selectable intermediates integrated KDS-System**
	INT120	
	INT150	
	INT100 FISSO	
	INT120-40	

horizontal — on stock

The ROL4-System is suitable for Standard-Punches Rolleri Type R1. There are no modifications necessary!

Rolleri Videos

Application of hydraulic clamping ROL4 **www.rolleritools.com/videos/rol4-hydraulic-clamping**

9

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

R2 ROLLERI CLAMPING SYSTEMS

W-ROL PN for Punches Rolleri Type R2

W-ROL PN – pneumatic

515 mm	20.28 in	26.8 kg/m

vertical

Our Advantages – Your Convenience

- vertical tool exchange of punches with:
  - ROL1-System
  - QuickLock-System
- Horizontal tool exchange of punches with safety pins
- significanly more efficient bending productivity

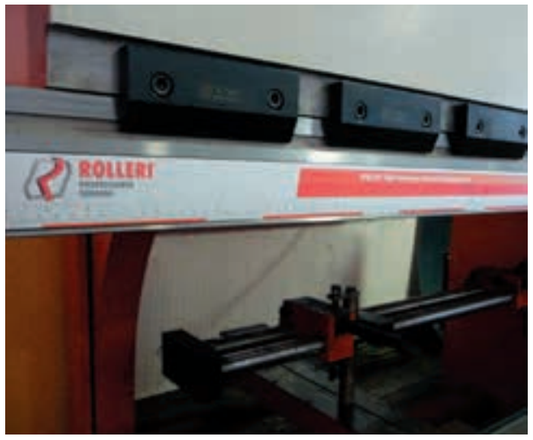

R3/RX ROLLERI CLAMPING SYSTEMS

ROL3-System for Punches Rolleri Type R3 and RX

ROLLERI® PROFESSIONAL BENDING

ROL3 HYD – hydraulic

500 mm	19.68 in

vertical horizontal

Our Advantages – Your Convenience

- can be used on press brake machines with different tang types
- custom manufacturing possible upon request
- significantly more efficient bending productivity

Equip your press brake with our ROL3 system in order to use the advantages of a hydraulic clamping system!

Examples of ROL3 with various systems

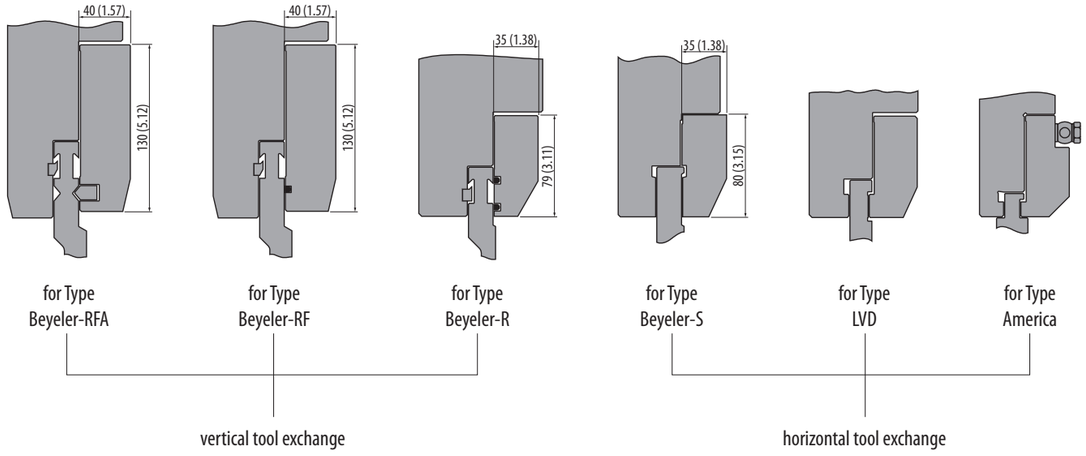

9

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Explanations

The **ROL2 System** is a system which is used to secure the die into place. It is made up of a special bar (known as **ROL2 CLAMP1**, L=500 mm / 19.68 in), which is operated through a centralized lever.

The **ROL2 System** has a built in spring mechanism and the clamp plates **ROL2 CLAMP1** are positioned in the inner lining of the system, which can be opened or tightened for the die to be perfectly secured.

A special rubber insert inside the clamp plates grants the best positioning for the tools. The press force of the clamp plates is evenly distribuited along the complete length. Therefore short tools are also securely fastened.

At a press brake of 3 meters (118.11 in), for example; all dies are secured with 6 simple hand movements.

Application

- **Directly on the die holder with 60 mm / 2.36 in width**
  - use of existing holes for the standard clamp plates (hole distance 100 mm / 3.94 in)
  - alternatively modifications of the existing threaded holes necessary
  - system is compatible for press brakes with automatic cowing tables
- **Directly on the die holder with 90 mm / 3.54 in width**
  - use of existing holes for the standard clamp plates (hole distance 100 mm / 3.94 in)
  - altertively modifications of the existing threaded holes necessary
  - for the use of dies Rolleri Type R1, two 15 mm / 0.59 in wide inserts are mounted and ground (securing with pins)
  - with rubber corners, the use of short tools is possible and are perfectly secured.
- **With Die Holder on the Die Rail**
  - 60 x 55 mm / 2.36 x 2.167 in die holder, ground and induction hardened.

Our Advantages – Your Convenience

- fast exchange of tools
- very time saving
- reduced production costs
- significantly increased profitability
- improved competitiveness

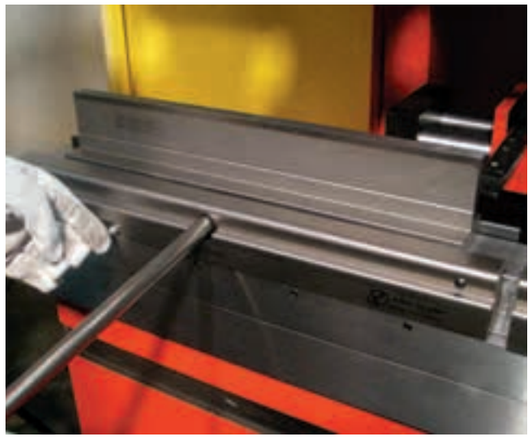

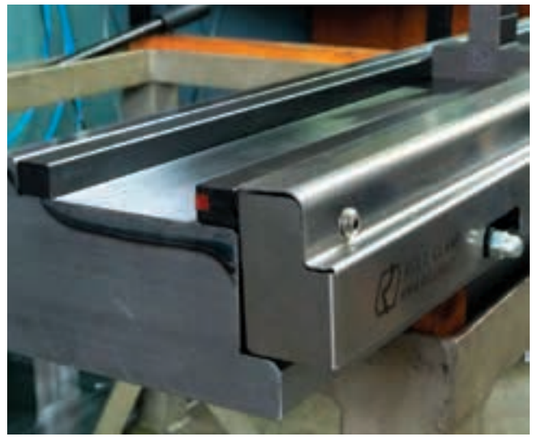

ROLLERI® PROFESSIONAL BENDING

ROL2 – manual

Clamp incl. Die holder			only Clamp		
table: 60 mm	2.36 in	38.0 kg	table: 60 mm	2.36 in	4.0 kg
table: 90 mm	3.54 in	58.0 kg	table: 90 mm	3.54 in	4.5 kg

L=1075 mm (42.32 in) L=500 mm (19.68 in)

ROL2 – hydraulic

Clamp incl. Die holder			only Clamp		
table: 60 mm	2.36 in	23.0 kg	table: 60 mm	2.36 in	5.0 kg
table: 90 mm	3.54 in	31.7 kg	table: 90 mm	3.54 in	5.5 kg

L=1075 mm (42.32 in) L=500 mm (19.68 in)

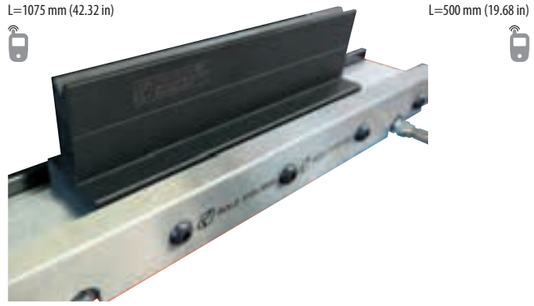

ROL2 – pneumatic

Clamp incl. Die holder			only Clamp		
table: 60 mm	2.36 in	23.0 kg	table: 60 mm	2.36 in	5.0 kg
table: 90 mm	3.54 in	31.7 kg	table: 90 mm	3.54 in	5.5 kg

L=1075 mm (42.32 in) L=500 mm (19.68 in)

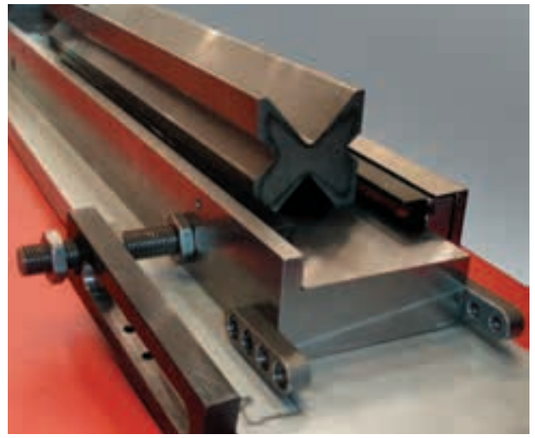

Movable Die Clamps for Dies Rolleri Type R1

Our Advantages – Your Convenience

- lowerable clamping plate
- significantly easier exchange of tools, due the possibility of removing the tool by sliding it out and not lifting the tool.

Rolleri Videos

movable die holders ST50-S:
www.rolleritools.com/videos/movable-die-holders

ST50-S

per piece 0.70 kg

Fe37: 370-470 N/mm² on stock

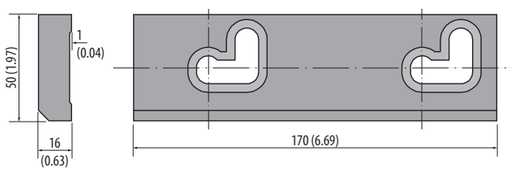

ROLLERI®

ROLLERI **ADAPTERS**

Punch Adapters	212 - 215
Bolted Adapters	216 - 217
Die Adapter Rails	218
Die Adapters	219 - 221
Modification: Wedge Bar / Tail	221

Punch Adapters

AD11

1000 kN/m max.



150 mm	5.91 in	3.0 kg

Rolleri Type R2
→ Rolleri Type R1

C45: 560-710 N/mm²

AD22

1000 kN/m max.



150 mm	5.91 in	3.4 kg

Rolleri Type R3 Beyeler R
→ Rolleri Type R1

C45: 560-710 N/mm²

AD3

1000 kN/m max.



150 mm	5.91 in	3.3 kg

Rolleri Type R3 Beyeler S
→ Rolleri Type R1

C45: 560-710 N/mm²

AD10

1000 kN/m max.

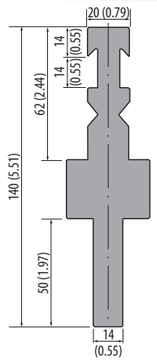

150 mm	5.91 in	3.4 kg

Rolleri Type R3 Beyeler RFA → Rolleri Type R1

C45: 560-710 N/mm²

AD1

1000 kN/m max.



Tang A: **AD1-A**		
150 mm	5.91 in	3.1 kg
Tang B: AD1-B		
150 mm	5.91 in	3.1 kg
Tang C: AD1-C		
150 mm	5.91 in	3.1 kg
Tang D: AD1-D		
150 mm	5.91 in	3.1 kg

Rolleri Type RX LVD
→ Rolleri Type R1

C45: 560-710 N/mm²

Tangs LVD

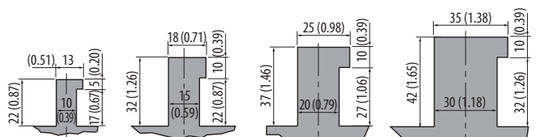

Tang A | Tang B | Tang C | Tang D



Punch Adapters

ROLLERI® PROFESSIONAL BENDING

AD13

1000 kN/m max.

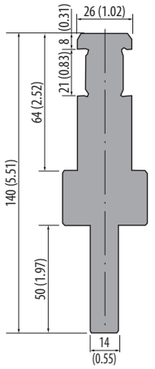

150 mm	5.91 in	3.0 kg

Rolleri Type RX EHT
→ Rolleri Type R1

C45: 560-710 N/mm²

AD14

1000 kN/m max.



150 mm	5.91 in	3.2 kg

Rolleri Type RX Gas-parini → Rolleri Type R1

C45: 560-710 N/mm²

AD15

1000 kN/m max.



150 mm	5.91 in	4.0 kg

Rolleri Type RX Ajial-Axial → Rolleri Type R1

C45: 560-710 N/mm²

AD16

1000 kN/m max.



5.9 inch	5.91 in	4.0 kg

Rolleri Type American
→ Rolleri Type R1

C45: 560-710 N/mm²

AD12

1000 kN/m max.



150 mm	5.91 in	1.5 kg

Rolleri Type RX Colgar
→ Rolleri Type R1

C45: 560-710 N/mm²

AD23

1000 kN/m max.

NEW

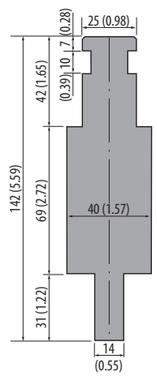

150 mm	5.91 in	5.0 kg

Rolleri Type RX Weinbrenner
→ Rolleri Type R1

C45: 560-710 N/mm²

10

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Punch Adapters

ADX

1000 kN/m max.



150 mm	5.91 in	3.5 kg

Type X
→ Rolleri Type R1

Producation according to your specifications

C45: 560-710 N/mm²

AD19-A

1000 kN/m max.

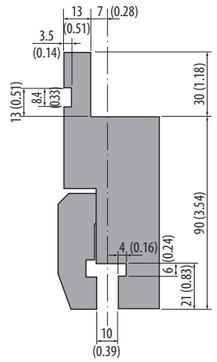

150 mm	5.91 in	6.0 kg

Rolleri Type R1
→ Rolleri Type RX LVD

C45: 560-710 N/mm²

on stock

ADX2

NEW

1000 kN/m max.



150 mm	5.91 in	4.0 kg

Type X
→ Rolleri Type R2

Producation according to your specifications

C45: 560-710 N/mm²

AD20

1000 kN/m max.



150 mm	5.91 in	4.0 kg

Rolleri Type R1
→ Rolleri Type R2

C45: 560-710 N/mm²

on stock

Pneumatic Adapters see page 206

AD20 LVD

NEW

1000 kN/m max.



C45: 560-710 N/mm²

Tang A: **AD20 LVD-A**		
150 mm	5.91 in	3.6 kg
Tang B: AD20 LVD-B		
150 mm	5.91 in	3.8 kg
Tang C: AD20 LVD-C		
150 mm	5.91 in	4.0 kg
Tang D: AD20 LVD-D		
150 mm	5.91 in	4.0 kg

Rolleri Type RX LVD
→ Rolleri Type R2

Tangs LVD

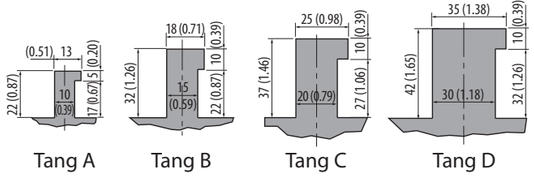

AD28

NEW

1000 kN/m max.



150 mm	5.91 in	5.0 kg

Rolleri Type RX EHT
→ Rolleri Type R2

C45: 560-710 N/mm²

AD29

NEW

1000 kN/m max.



150 mm	5.91 in	4.5 kg

Rolleri Type RX Weinbrenner
→ Rolleri Type R2

C45: 560-710 N/mm²

Rolleri Videos

Bolted Adapters AW, P. 216-217
www.rolleritools.com/videos/bolted-adapters

Punch Adapters

INT80-100

1000 kN/m max.



835 mm	32.87 in	25.0 kg
415 mm	16.34 in	12.5 kg

C45: 560-710 N/mm²

INT67-79

1000 kN/m max.



835 mm	32.87 in	20.5 kg
415 mm	16.34 in	10.0 kg

C45: 560-710 N/mm²

INT100-A / INT120-A

1000 kN/m max.

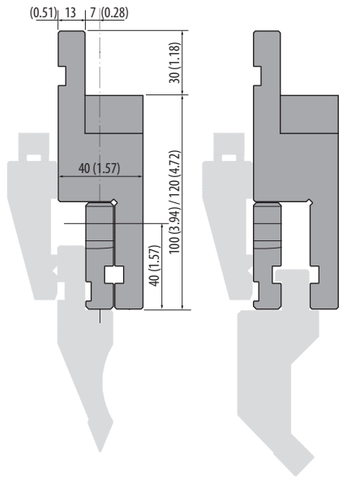

INT100-A		
150 mm	5.91 in	3.5 kg
INT120-A		
150 mm	5.91 in	5.2 kg

C45: 560-710 N/mm²

suitable Models:

- **Manual system** (ST60, STL60, STX60 etc.), see page 200
- **Fast Clamping** (ROL1 Clamp3), see page 201
- **Pneumatic system** only on **INT120-A** (ROL1 Clamp3 PN), see page 201
- **Hydraulic system** (ROL1 Clamp3 HYD), see page 201

horizontal

INT100-N (Newton)

1000 kN/m max.

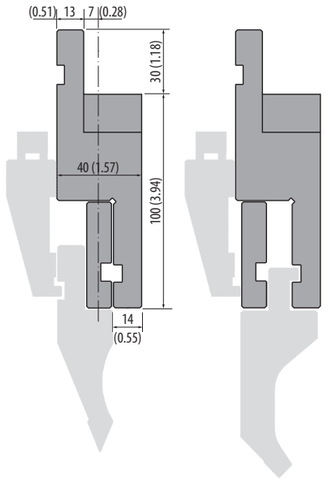

150 mm	5.91 in	3.5 kg

C45: 560-710 N/mm²

suitable Models:

- **Manual system** (ST60, STL60, STX60 etc.), see page 200
- **Fast Clamping** (ROL1 Clamp3), see page 201
- **Hydraulic system** (ROL1 Clamp3 HYD), see page 201

horizontal

INT120-40-A

1000 kN/m max.

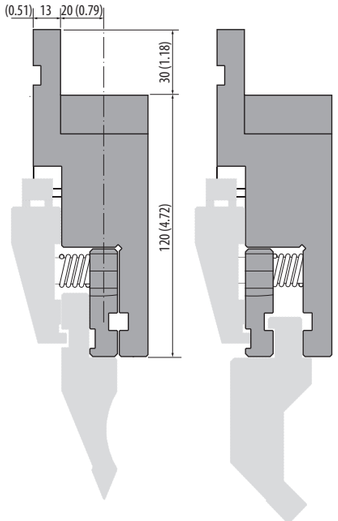

150 mm	5.91 in	6.0 kg

C45: 560-710 N/mm²

suitable Models:

- **Manual system** (ST60, STL60, STX60 etc.), see page 200
- **Fast Clamping** (ROL1 Clamp3), see page 201

horizontal

INT100-A (American)

1000 kN/m max.

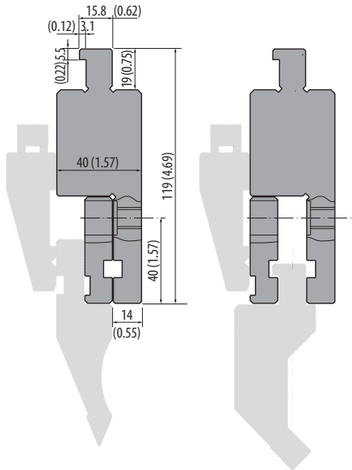

150 mm	5.91 in	3.5 kg

C45: 560-710 N/mm²

suitable Models:

- **Manual system** (ST60, STL60, STX60 etc.), see page 200
- **Fast Clamping** (ROL1 Clamp3), see page 201
- **Hydraulic system** (ROL1 Clamp3 HYD), see page 201

horizontal

10

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Bolted Adapters

AW11

1000 kN/m max.

NEW



835 mm	32.87 in	3.0 kg
415 mm	16.34 in	1.5 kg
805 mm segmented	31.69 in segmented	2.9 kg

Rolleri Type R2 → Rolleri Type R1

C45: 560-710 N/mm²

on stock

Do you prefer our QuickLock or ROL1-System? Contact us now!

AW3

1000 kN/m max.

NEW



835 mm	32.87 in	9.0 kg
415 mm	16.34 in	4.5 kg
805 mm segmented	31.69 in segmented	8.7 kg

Rolleri Type R3 Beyeler S → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW10

1000 kN/m max.

NEW



835 mm	32.87 in	10.0 kg
415 mm	16.34 in	5.0 kg
805 mm segmented	31.69 in segmented	9.6 kg

Rolleri Type R3 Beyeler RFA → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW12

1000 kN/m max.

NEW



835 mm	32.87 in	7.0 kg
415 mm	16.34 in	3.5 kg
805 mm segmented	31.69 in segmented	6.7 kg

Rolleri Type RX Colgar → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW1-A

1000 kN/m max.

NEW



835 mm	32.87 in	4.5 kg
415 mm	16.34 in	2.2 kg
805 mm segmented	31.69 in segmented	4.3 kg

Rolleri Type RX LVD A → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW1-B

1000 kN/m max.

NEW



835 mm	32.87 in	6.3 kg
415 mm	16.34 in	3.1 kg
805 mm segmented	31.69 in segmented	6.0 kg

Rolleri Type RX LVD B → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW1-C

1000 kN/m max.

NEW



835 mm	32.87 in	9.7 kg
415 mm	16.34 in	4.8 kg
805 mm segmented	31.69 in segmented	9.4 kg

Rolleri Type RX LVD C → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW1-D

1000 kN/m max.

NEW



835 mm	32.87 in	11.5 kg
415 mm	16.34 in	5.7 kg
805 mm segmented	31.69 in segmented	11.1 kg

Rolleri Type RX LVD D → Rolleri Type R1

C45: 560-710 N/mm²

on stock

Bolted Adapters

ROLLERI® PROFESSIONAL BENDING

AW13

1000 kN/m max.

NEW



835 mm	32.87 in	12.6 kg
415 mm	16.34 in	6.3 kg
805 mm segmented	31.69 in segmented	12.1 kg

Rolleri Type RX EHT → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW14

1000 kN/m max.

NEW



835 mm	32.87 in	8.0 kg
415 mm	16.34 in	4.0 kg
805 mm segmented	31.69 in segmented	7.7 kg

Rolleri Type RX Gas-parini → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AW15

1000 kN/m max.

NEW



835 mm	32.87 in	4.6 kg
415 mm	16.34 in	2.3 kg
805 mm segmented	31.69 in segmented	4.4 kg

Rolleri Type RX Ajial-Axial → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AWC16

1000 kN/m max.

NEW



835 mm	32.87 in	5.0 kg
415 mm	16.34 in	2.5 kg
805 mm segmented	31.69 in segmented	4.8 kg

Rolleri Type RX Colly → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AWC13.5

1000 kN/m max.

NEW



835 mm	32.87 in	4.8 kg
415 mm	16.34 in	2.4 kg
805 mm segmented	31.69 in segmented	4.6 kg

Rolleri Type RX Colly → Rolleri Type R1

C45: 560-710 N/mm²

on stock

AWX

1000 kN/m max.

NEW



835 mm	32.87 in	3.0 kg
415 mm	16.34 in	1.5 kg
805 mm segmented	31.69 in segmented	3.0 kg

Individual → Rolleri Type R1

C45: 560-710 N/mm²

INT35

1000 kN/m max.

NEW



835 mm	32.87 in	4.0 kg
525 mm	20.67 in	2.5 kg
805 mm segmented	31.69 in segmented	3.9 kg

C45: 560-710 N/mm²

INT35-A

1000 kN/m max.

NEW



835 mm	32.87 in	5.0 kg
415 mm	16.34 in	2.5 kg
805 mm segmented	31.69 in segmented	4.8 kg

C45: 560-710 N/mm²

10

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Die Adapter Rails

C 2000/S / C 2500/S / C 3000/S / C 4000/S

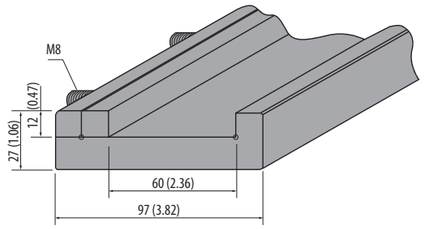

Model	Length (mm)	Length (in)	Weight
C 2000/S	2100	82.68	27.0 kg
C 2500/S	2600	102.36	34.0 kg
C 3000/S	3100	122.05	40.0 kg
C 4000/S	4100	161.42	53.0 kg

on stock

C45: 560-710 N/mm²

TC 2000/S / TC 2500/S / TC 3000/S / TC 4000/S

NEW

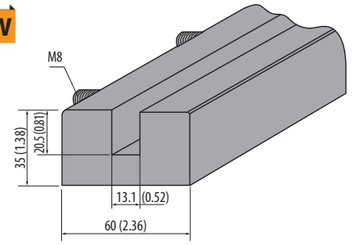

Model	Length (mm)	Length (in)	Weight
TC 2000/S	2100 mm	82.68	30.0 kg
TC 2500/S	2600 mm	102.36	37.0 kg
TC 3000/S	3100 mm	122.05	44.0 kg
TC 4000/S	4100 mm	161.42	59.0 kg

C45: 560-710 N/mm²

C 1050/R

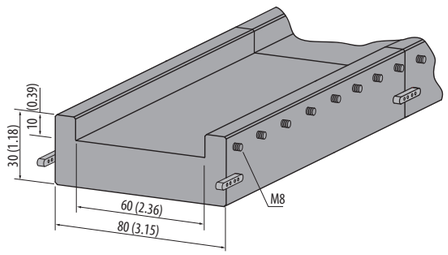

Model	Length (mm)	Length (in)	Weight
C 1050/R	1050	41.34	15.0 kg
C 1050/R/C	520	20.47	7.5 kg

on stock

C45: 560-710 N/mm²

C 1050/RS

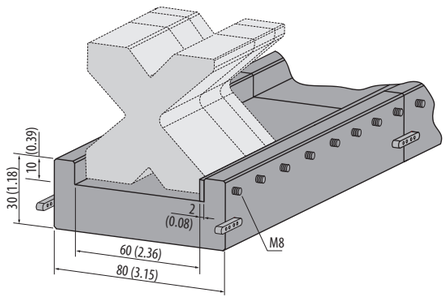

Model	Length (mm)	Length (in)	Weight
C 1050/RS	1050 mm	41.34	15.0 kg
C 1050/RS/C	520 mm	20.47	7.5 kg

on stock

C45: 560-710 N/mm²

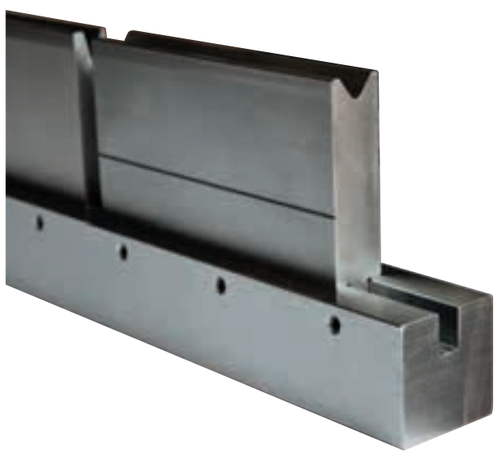

C 1050-90

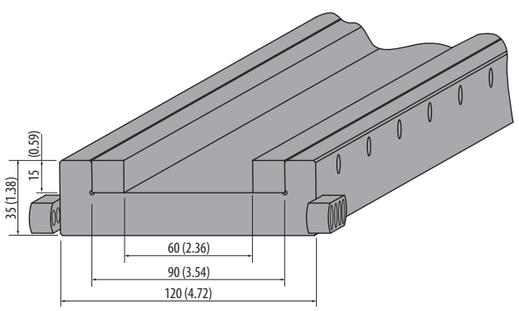

Model	Length (mm)	Length (in)	Weight
C 1050-90	1050	41.34	27.2 kg
C 1050-90/C	520	20.47	13.5 kg

on stock

C45: 560-710 N/mm²

Die Adapters

ROLLERI® PROFESSIONAL BENDING

AD6

1000 kN/m max.



1000 mm	39.37 in	12.0 kg
500 mm	19.68 in	6.0 kg

Rolleri Type R1
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

on stock

AD6 Example of Application



AD5

1000 kN/m max.



1000 mm	39.37 in	26.1 kg
500 mm	19.68 in	13.0 kg

Rolleri Type R1
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

on stock

AD5 Example of Application



AD7

1000 kN/m max.



835 mm	32.87 in	18.0 kg
415 mm	16.34 in	9.0 kg

Rolleri Type R2/R3
→ Rolleri Type R1

C45: 560-710 N/mm²

on stock

AD7 Example of Application



AD24

1000 kN/m max.

NEW



835 mm	32.87 in	28.5 kg
415 mm	16.34 in	14.2 kg

Rolleri Type RX EHT
→ Rolleri Type R1

C45: 560-710 N/mm²

AD24 Example of Application



on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

AD25

1000 kN/m max.

NEW



500 mm	19.68 in	7.5 kg

Rolleri Type RX EHT
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

AD25 Example of Application



AD9-12.7

1000 kN/m max.



835 mm	32.87 in	17.0 kg
415 mm	16.34 in	8.5 kg

Rolleri Type RX LVD
→ Rolleri Type R1

C45: 560-710 N/mm²

AD9-12.7 Example of Application



AD8-12.7

1000 kN/m max.



1000 mm	39.37 in	15.0 kg
500 mm	19.68 in	7.5 kg

Rolleri Type RX LVD
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

AD8-12.7 Example of Application



AD26

1000 kN/m max.

NEW



835 mm	32.87 in	23.0 kg
415 mm	16.34 in	11.4 kg

Rolleri Type RX Weinbrenner
→ Rolleri Type R1

C45: 560-710 N/mm²

AD26 Example of Application



ROLLERI® PROFESSIONAL BENDING

AD27

1000 kN/m max.

NEW



500 mm	19.68 in	4.5 kg

Rolleri Type RX Weinbrenner
→ Rolleri Type R2/R3

C45: 560-710 N/mm²

AD27 Example of Application



AD17

1000 kN/m max.



835 mm	32.87 in	18.0 kg
415 mm	16.34 in	9.0 kg

Type American
→ Rolleri Type R1

C45: 560-710 N/mm²

AD17 Example of Application



AD18

1000 kN/m max.



835 mm	32.87 in	18.0 kg
415 mm	16.34 in	9.0 kg

Type American
→ Rolleri Type R1

C45: 560-710 N/mm²

AD18 Example of Application



Modification: Wedge Bar / Tail

In order to use the dies Rolleri Type R1 on other press brake machines, a 10 mm (0.39 in) groove is milled to insert a ground wedge bar / tail into the die.

Wedge Bar / Tail (W x H)	System
13 x 30 mm (0.51 x 1.18 in)	Rolleri Type R2 and R3 (Bystronic-Beyeler/Safan/Trumpf etc.)
55 x 55 mm (2.17 x 2.17 in)	Rolleri Type RX EHT
12.7 x 29 mm (0.50 x 1.14 in)	Rolleri Type RX LVD
35 x 55 mm (1.38 x 2.17 in)	Rolleri Type RX Weinbrenner

Specific information and prizes are found in the Rolleri Service / Modifications Chapter (see page 252)

Mounting example

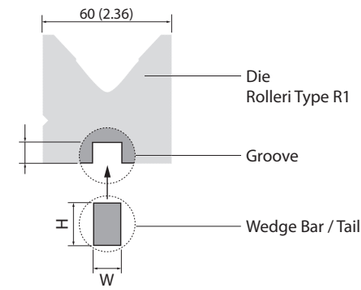

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROLLERI®

ROLLERI **MARK FREE BENDING**

Prevention of Bending Marks	224
Bending Foil Holder/Tensioner	224
Bending Foil	225
PU-Holder and PU-Upholstery	226 - 227
Synthetic Dies	228 - 229

Prevention of Bending Marks

One of the challenges of bending is to prevent the profile of having bending marks, such as; scratches and abrasions on the surface areas.

Especially of Profile made of:

- Stainless Steel
- Aluminium
- painted metal panels

It is often the case of a line building from the contact of the sheet metal with the die. This is the cause of friction of sheet metal on small radius.

In order to prevent this markings, the following solutions are possible:

- **Bending Foil**
- **PU-Upholstery**
- **Plastic Dies**
- **enlarged opening radius on special T-Dies**

Our Advantages – Your Convenience

- Prevention of scratches and abrasions on bent sheet metals
- No post-processing necessary, therefore time and cost saving
- No contamination of bended pieces
- increases the product quality
- easy handling

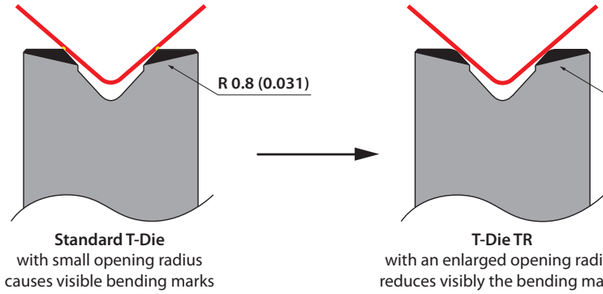

Standard T-Die
with small opening radius
causes visible bending marks

T-Die TR
with an enlarged opening radius
reduces visibly the bending marks

T-Dies (TR) with an enlarged opening radius for the prevention of bending marks
see pages 54-55, 60-61

Bending Foil - Holder / Tensioner

CT

per piece | 6.0 kg

on stock

ROLLERI® PROFESSIONAL BENDING

Bending Foil

Our Advantages – Your Convenience

- easy handling
- can be used flexibly
- Prevention of Bending Marks
- decrease of post-processing of bent parts
- no contamination of the material
- increased product quality

Bending Foil: Practical, easy and economic!

ROLFILM

on stock

Model	Thickness (mm)	Thickness (in)	Width (mm)	Width (in)	Length (m)	Length (in)
Rolfilm 3-0.4-100	0.4	0.016	100	3.94	3	118.11
Rolfilm 10-0.4-100	0.4	0.016	100	3.94	10	393.70
Rolfilm 20-0.4-100	0.4	0.016	100	3.94	20	787.40
Rolfilm 30-0.4-100	0.4	0.016	100	3.94	30	1181.10
Rolfilm 3-0.4-150	0.4	0.016	150	5.91	3	118.11
Rolfilm 10-0.4-150	0.4	0.016	150	5.91	10	393.70
Rolfilm 20-0.4-150	0.4	0.016	150	5.91	20	787.40
Rolfilm 30-0.4-150	0.4	0.016	150	5.91	30	1181.10
Rolfilm 3-0.6-150	0.6	0.024	150	5.91	3	118.11
Rolfilm 10-0.6-150	0.6	0.024	150	5.91	10	393.70
Rolfilm 20-0.6-150	0.6	0.024	150	5.91	20	787.40
Rolfilm 30-0.6-150	0.6	0.024	150	5.91	30	1181.10
Rolfilm 3-0.6-200	0.6	0.024	200	7.87	3	118.11
Rolfilm 10-0.6-200	0.6	0.024	200	7.87	10	393.70
Rolfilm 20-0.6-200	0.6	0.024	200	7.87	20	787.40
Rolfilm 30-0.6-200	0.6	0.024	200	7.87	30	1181.10
Rolfilm 3-2-150	2.0	0.079	150	5.91	3	118.11
Rolfilm 10-2-150	2.0	0.079	150	5.91	10	393.70
Rolfilm 20-2-150	2.0	0.079	150	5.91	20	787.40
Rolfilm 30-2-150	2.0	0.079	150	5.91	30	1181.10

Rolleri Videos

mark free bending:
www.rolleritools.com/videos/mark-free-bending

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

MPG25



835 mm	32.87 in	18.5 kg
415 mm	16.34 in	9.2 kg

C45: 560-710 N/mm²

MPG50



835 mm	32.87 in	44.0 kg
415 mm	16.34 in	22.0 kg

C45: 560-710 N/mm²

GM 25x25



835 mm	32.87 in	0.6 kg
415 mm	16.34 in	0.3 kg

polyurethane

GM 50x50



835 mm	32.87 in	2.5 kg
415 mm	16.34 in	1.2 kg

polyurethane

GMF 25x25x10



835 mm	32.87 in	0.6 kg
415 mm	16.34 in	0.3 kg

polyurethane

GMF 50x50x25



835 mm	32.87 in	2.5 kg
415 mm	16.34 in	1.2 kg

polyurethane

PSTCON

cover plate

C45: 560-710 N/mm²

Model	A (mm)	A (in)	R (mm)	R (in)	Weight
PSTCON25	58	2.28	58	2.28	1.2 kg
PSTCON50	108	4.25	75	2.95	0.6 kg
PSTCON75	123	4.84	80	3.15	0.8 kg
PSTCON100	153	6.02	80	3.15	1.0 kg

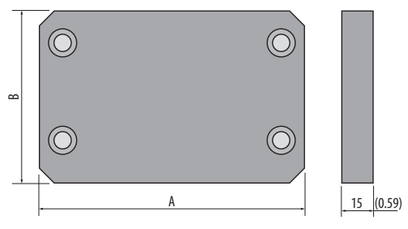

Mounting example

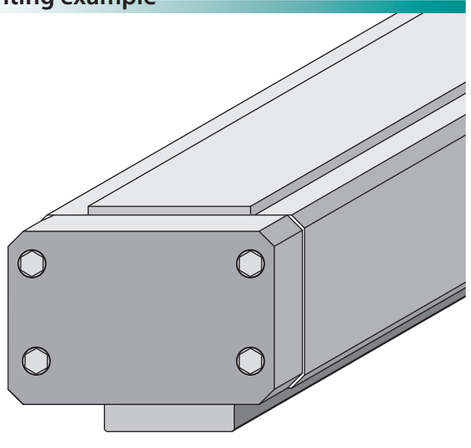

ROLLERI® PROFESSIONAL BENDING

MPG75



835 mm	32.87 in	46.0 kg
415 mm	16.34 in	22.5 kg

C45: 560-710 N/mm²

Mounting example

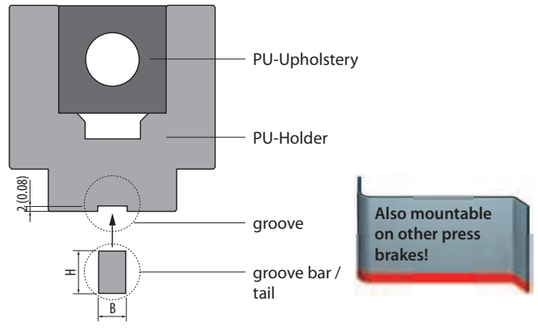

GM 75x50



835 mm	32.87 in	3.5 kg
415 mm	16.34 in	1.7 kg

polyurethane

GMF 75x50x20



835 mm	32.87 in	3.5 kg
415 mm	16.34 in	1.7 kg

polyurethane

MPG100

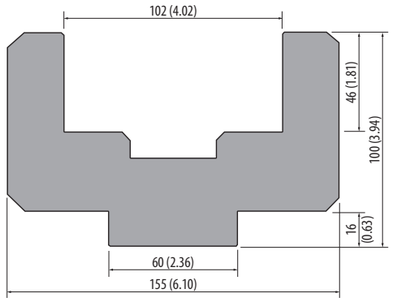

835 mm	32.87 in	55.0 kg
415 mm	16.34 in	27.5 kg

C45: 560-710 N/mm²

PU-Upholstery are suitable for radius- and U-profile bendings, etc.

GM 100x50



835 mm	32.87 in	5.0 kg
415 mm	16.34 in	2.5 kg

polyurethane

GMF 100x50x20



835 mm	32.87 in	3.0 kg
415 mm	16.34 in	2.2 kg

polyurethane

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Our Advantages – Your Convenience

- easy Handling
- faster and easier exchange of plastic dies
- prevention of bending marks
- decrease of post-processing of bent pieces
- no contamination of the materials
- increased product quality

Mounting example

Synthetic dies will be adjusted into the housing and secured with bolted screws.

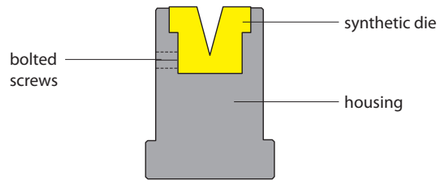

TN80.14

1000 kN/m max.

835 mm	32.87 in	15.0 kg
415 mm	16.34 in	7.5 kg

Rolleri Type R1

C45: 560-710 N/mm²



INS14...

200 kN/m max.

835 mm	32.87 in	0.30 kg
415 mm	16.34 in	0.15 kg



Model	α	V (mm)	V (in)
INS14.06.88	88°	6	0.24
INS14.08.88	88°	8	0.31
INS14.10.88	88°	10	0.39
INS14.06.60	60°	6	0.24
INS14.08.60	60°	8	0.31
INS14.10.60	60°	10	0.39

Model	α	V (mm)	V (in)
INS14.06.45	45°	6	0.24
INS14.08.45	45°	8	0.31
INS14.10.45	45°	10	0.39
INS14.06.30	30°	6	0.24
INS14.08.30	30°	8	0.31

TN80.20

1000 kN/m max.

835 mm	32.87 in	19.0 kg
415 mm	16.34 in	9.5 kg

Rolleri Type R1

C45: 560-710 N/mm²



INS20...

200 kN/m max.

835 mm	32.87 in	0.40 kg
415 mm	16.34 in	0.20 kg



Model	α	V (mm)	V (in)
INS20.06.88	88°	6	0.24
INS20.08.88	88°	8	0.31
INS20.10.88	88°	10	0.39
INS20.12.88	88°	12	0.47
INS20.16.88	88°	16	0.63
INS20.06.60	60°	6	0.24
INS20.08.60	60°	8	0.31
INS20.10.60	60°	10	0.39
INS20.12.60	60°	12	0.47
INS20.16.60	60°	16	0.63

Model	α	V (mm)	V (in)
INS20.06.45	45°	6	0.24
INS20.08.45	45°	8	0.31
INS20.10.45	45°	10	0.39
INS20.12.45	45°	12	0.47
INS20.06.30	30°	6	0.24
INS20.08.30	30°	8	0.31
INS20.10.30	30°	10	0.39

ROLLERI® PROFESSIONAL BENDING

TN80.30

1000 kN/m max.

835 mm	32.87 in	25.0 kg
415 mm	16.34 in	12.5 kg

Rolleri Type R1

C45: 560-710 N/mm²



INS30...

200 kN/m max.

835 mm	32.87 in	0.50 kg
415 mm	16.34 in	0.25 kg



Model	α	V (mm)	V (in)
INS30.06.88	88°	6	0.24
INS30.08.88	88°	8	0.31
INS30.10.88	88°	10	0.39
INS30.12.88	88°	12	0.47
INS30.16.88	88°	16	0.63
INS30.20.88	88°	20	0.79
INS30.25.88	88°	25	0.47
INS30.06.60	60°	6	0.24
INS30.08.60	60°	8	0.31
INS30.10.60	60°	10	0.39
INS30.12.60	60°	12	0.47
INS30.16.60	60°	16	0.63
INS30.20.60	60°	20	0.79

Model	α	V (mm)	V (in)
INS30.06.45	45°	6	0.24
INS30.08.45	45°	8	0.31
INS30.10.45	45°	10	0.39
INS30.12.45	45°	12	0.47
INS30.16.45	45°	16	0.63
INS30.20.45	45°	20	0.79
INS30.06.30	30°	6	0.24
INS30.08.30	30°	8	0.31
INS30.10.30	30°	10	0.39
INS30.12.30	30°	12	0.47
INS30.16.30	30°	16	0.63

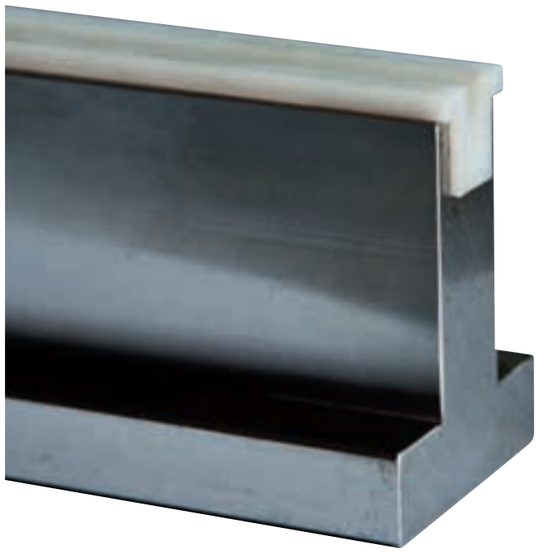

Articles on stock – Please note that delivery time varies according to your location.

TMN95.20

1000 kN/m max.

835 mm	32.87 in	12.0 kg
415 mm	16.34 in	6.0 kg

Rolleri Type R2/R3

C45: 560-710 N/mm²



INS20...

200 kN/m max.

835 mm	32.87 in	0.40 kg
415 mm	16.34 in	0.20 kg



Model	α	V (mm)	V (in)
INS20.06.88	88°	6	0.24
INS20.08.88	88°	8	0.31
INS20.10.88	88°	10	0.39
INS20.12.88	88°	12	0.47
INS20.16.88	88°	16	0.63
INS20.06.60	60°	6	0.24
INS20.08.60	60°	8	0.31
INS20.10.60	60°	10	0.39
INS20.12.60	60°	12	0.47
INS20.16.60	60°	16	0.63

Model	α	V (mm)	V (in)
INS20.06.45	45°	6	0.24
INS20.08.45	45°	8	0.31
INS20.10.45	45°	10	0.39
INS20.12.45	45°	12	0.47
INS20.06.30	30°	6	0.24
INS20.08.30	30°	8	0.31
INS20.10.30	30°	10	0.39

Article on stock
Please ask for delivery time!
1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)
Articles on stock – Please note that delivery time depends on your location.

ROLLERI®

ROLLERI **SPECIAL** AND **HEAVY DUTY TOOLS**

Explanation of Special Tools	232
Explanation of Heavy Duty Tools	233
Heavy Duty Tools	234 - 235
Examples of Special Tools	236 - 238
Dies with Rollers	239 - 241
ROL6-System	242
Panelling Tools	242
BLACKFIRE	243

Special Solutions

Our Advantages – Your Convenience

- in-house construction and production (no reseller or dealer)
- competent consulting
- client specific developments
- tracking of every tool possible, with a unique serial number on every article after the quality control check
- precision grinding (tolerance of +/-0.01mm)
- guaranteed tool reproduction
- exact parallelism
- bending tests upon request

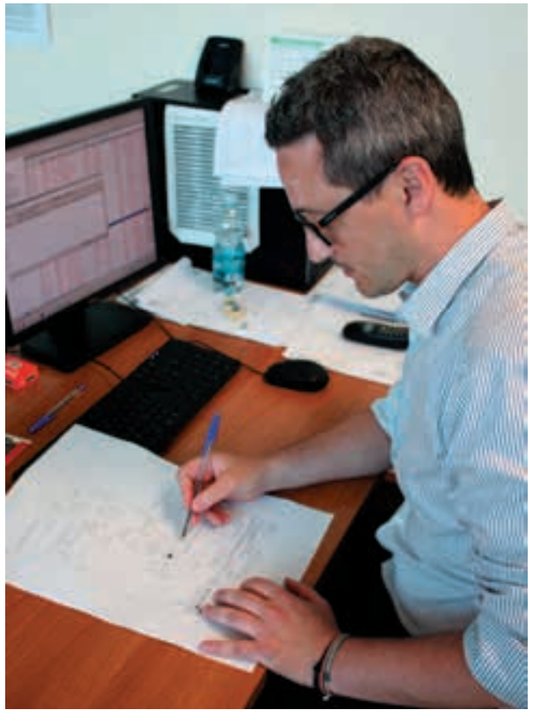

Special Tooling for:

- Z-Profiles
- Hat-Profiles
- Trapezoidal Profiles
- Pressed contours
- Foldings
- Hinges
- Radii
- Beads
- Special Profiles
- etc.

Material

The raw material is obtained from qualified suppliers which compose the chemical formulas according to international standards. Therefore, guaranteeing high resilience and tensile strength.

Material Type	Mechanical resistance of the material and the tool body	Hardness of the material and the tool body	Hardness of the operating surfaces after induction hardening
42CrMo4	900-1150 N/mm²	29.1 - 36.9 HRC	54 - 60 HRC
C45	560-710 N/mm²	12 - 15.5 HRC	54 - 60 HRC
1.2767	830 N/mm²	22 - 25 HRC	54 - 60 HRC

- Specifications for the maximum press force kN/m are indicated as such, **1 t = 10 kN**.

Solutions for heavy tasks

Our Advantages – Your Convenience

The bending of materials with extreme high resistance, (Hardox, Weldox, etc.), has developed into an important task.

The Heavy Duty tools of Rolleri are built and finished for these challenges.

Tools that have a press force up to 4000 kN/m, offer you many production possibility.

Our many years of experience in the area of special and heavy duty tooling, along with our own developing department, guarantee you functional and economic solutions in the bending sector.

From the compatible tang to the punch onto the compatible die; we manufacture everything in our own production facilities.

Take advantage of the direct contact to the manufacturer and the benefits which come along with it.

Contact us now!

We are here to help you!

RHD.300

NEW

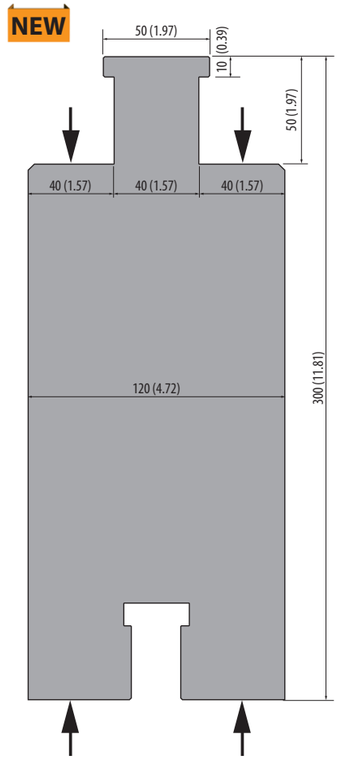

RHD.300-250		
500 mm	19.68 in	122.0 kg

2500 kN/m max.
42Cr: 900-1150 N/mm²

RHD.300-400		
500 mm	19.68 in	122.0 kg

4000 kN/m max.
1.2767: 830 N/mm²

RHD.300 HYD

NEW

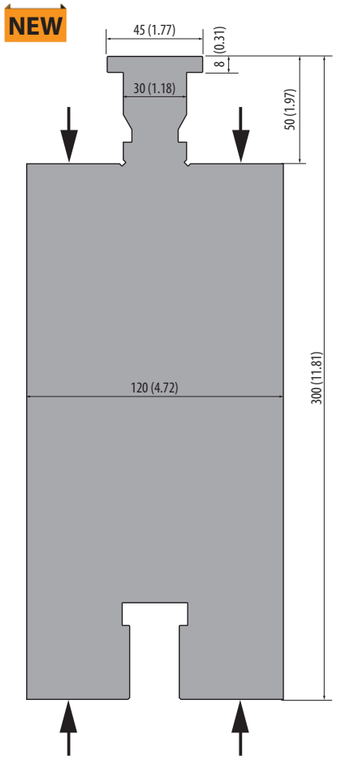

RHD.300-250 HYD		
500 mm	19.68 in	120.0 kg

2500 kN/m max.
42Cr: 900-1150 N/mm²

RHD.300-400 HYD		
500 mm	19.68 in	120.0 kg

4000 kN/m max.
1.2767: 830 N/mm²

RHDP.60

NEW

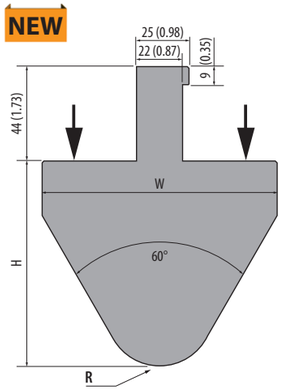

500 mm	19.68 in

2500 kN/m max.

Model	H (mm)	H (in)	W (mm)	W (in)	R (mm)	R (in)
RHDP.60.20-250	96	3.78	110	4.33	20	0.79
RHDP.60.25-250	96	3.78	110	4.33	25	0.98
RHDP.60.30-250	96	3.78	110	4.33	30	1.18
RHDP.60.40-250	96	3.78	110	4.33	40	1.57
RHDP.60.50-250	96	3.78	110	4.33	50	1.97
RHDP.60.60-250	96	3.78	110	4.33	60	2.36
RHDP.60.70-250	86	3.39	140	5.51	70	2.76
RHDP.60.80-250	86	3.39	150	5.91	80	3.15
RHDP.60.90-250	86	3.39	165	6.50	90	3.54
RHDP.60.100-250	86	3.39	185	7.28	100	3.94

42Cr: 900-1150 N/mm²

4000 kN/m max.

Model	H (mm)	H (in)	W (mm)	W (in)	R (mm)	R (in)
RHDP.60.20-400	96	3.78	110	4.33	20	0.79
RHDP.60.25-400	96	3.78	110	4.33	25	0.98
RHDP.60.30-400	96	3.78	110	4.33	30	1.18
RHDP.60.40-400	96	3.78	110	4.33	40	1.57
RHDP.60.50-400	96	3.78	110	4.33	50	1.97
RHDP.60.60-400	96	3.78	110	4.33	60	2.36
RHDP.60.70-400	86	3.39	140	5.51	70	2.76
RHDP.60.80-400	86	3.39	150	5.91	80	3.15
RHDP.60.90-400	86	3.39	165	6.50	90	3.54
RHDP.60.100-400	86	3.39	185	7.28	100	3.94

1.2767: 830 N/mm²

ROLLERI® PROFESSIONAL BENDING

RHD.500-200

2000 kN/m max.

150 mm	19.68 in	253.0 kg

NEW

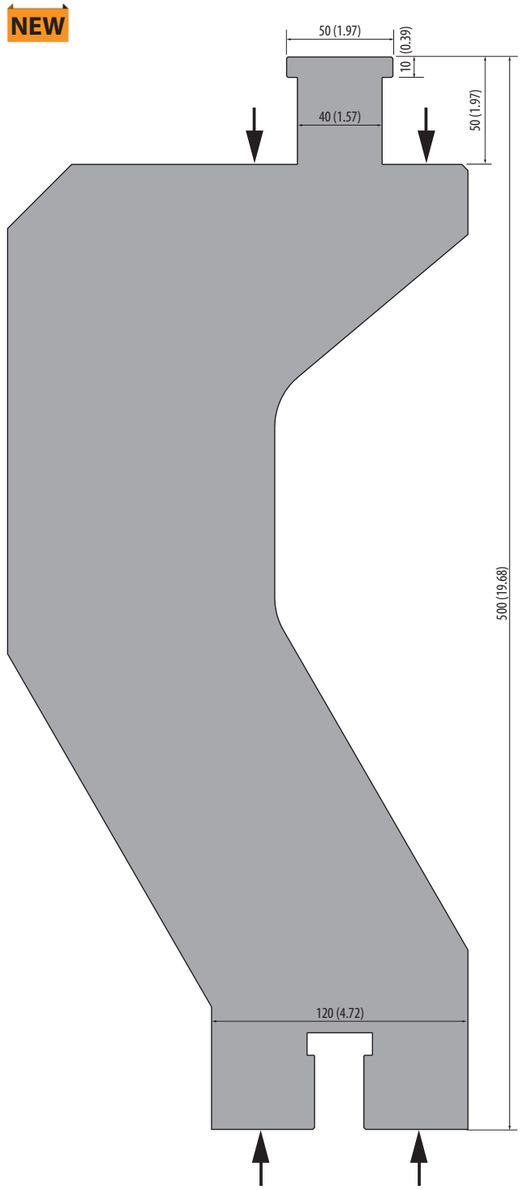

42Cr: 900-1150 N/mm²

More Tools for Heavy Duty operations can be found on pages 156-158

Tool examples

SPE1

Hat-Profiles



SPE2

Z-Profiles





SPE3

Trapezoidal Profiles





SPE4





SPE5

Hinges





SPE6





SPE7



SPE-X



ROLLERI® PROFESSIONAL BENDING

SPE9

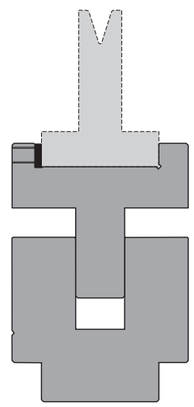

SPE-P1



SPE-P2



SPE-P3



SPE-P4

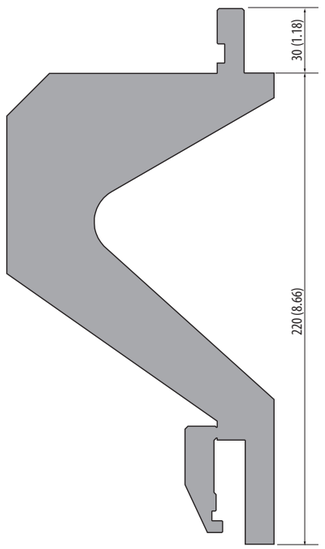

Front- and Hemming Tool (Foldings)

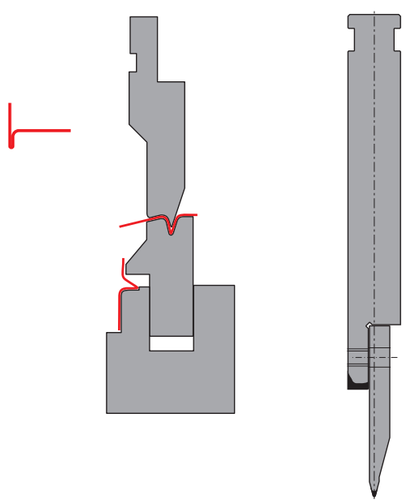

12

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Tool examples

Radii

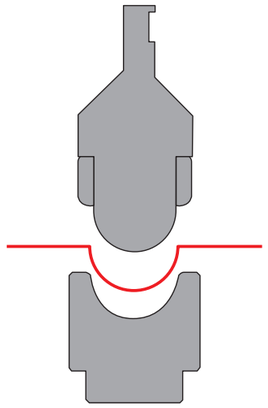

Pressing

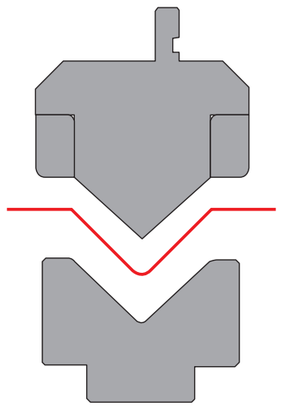

Special Profiles

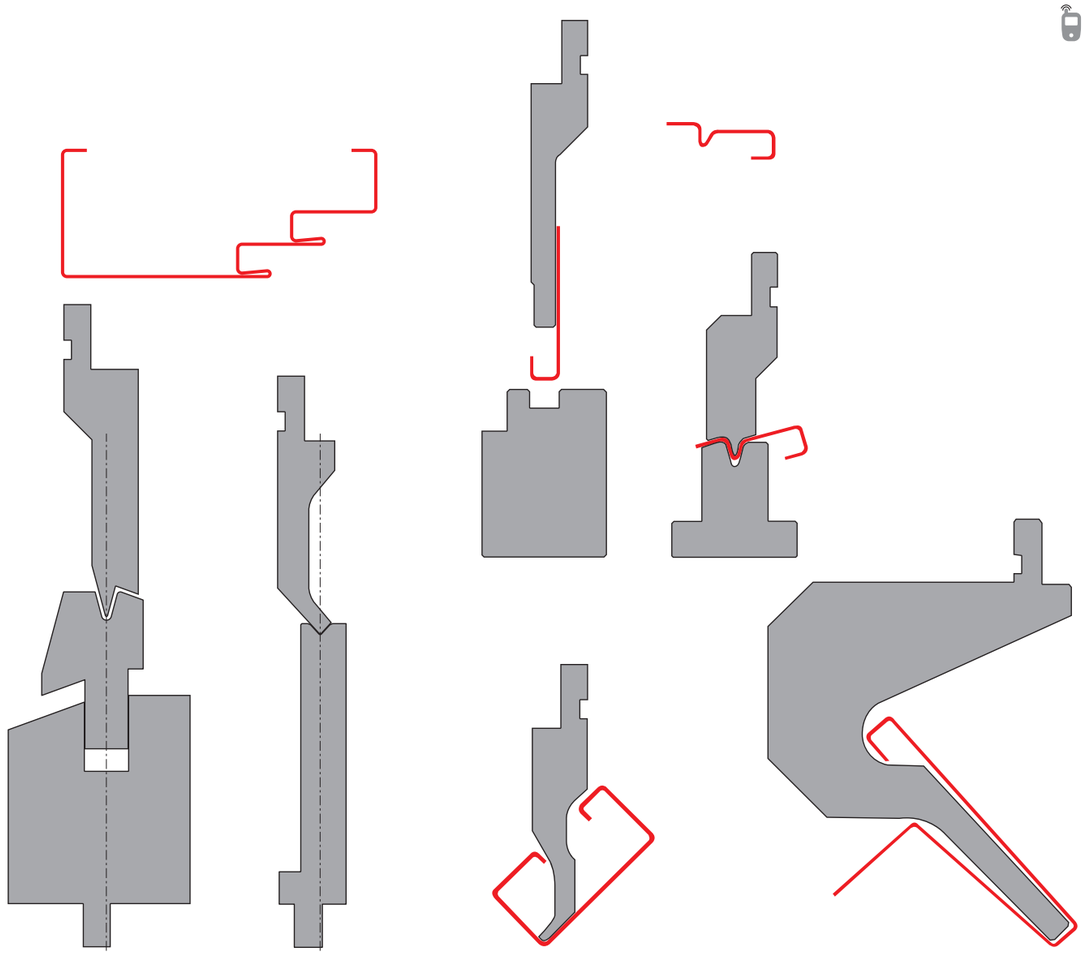

ROLLERI® PROFESSIONAL BENDING

Dies with Rollers

MR90



Rollen: C53.60-62 HRC
42Cr: 900-1150 N/mm²

Model	V (mm)	V (in)	B (mm)	B (in)	C (mm)	C (in)	Length (mm)	Length (in)	Weight (kg)
MR90.20.78	20	0.79	45	1.77	6	0.24	835	32.87	15.0
MR90.24.78	24	0.94	49	1.93	6	0.24	835	32.87	17.0
MR90.30.78	30	1.18	60	2.36	8	0.31	835	32.87	21.0
MR90.40.78	40	1.57	70	2.76	8	0.31	835	32.87	24.0
MR90.50.78	50	1.97	84	3.31	10	0.39	835	32.87	28.0
MR90.60.78	60	2.36	94	3.70	10	0.39	835	32.87	31.0
MR90.70.78	70	2.76	104	4.09	10	0.39	835	32.87	35.0

MR130



Rollen: C53.60-62 HRC
42Cr: 900-1150 N/mm²

Model	V (mm)	V (in)	B (mm)	B (in)	C (mm)	C (in)	Length (mm)	Length (in)	Weight (kg)
MR130.20.78	20	0.79	45	1.77	6	0.24	835	32.87	22.0
MR130.24.78	24	0.94	49	1.93	6	0.24	835	32.87	25.0
MR130.30.78	30	1.18	60	2.36	8	0.31	835	32.87	28.0
MR130.40.78	40	1.57	70	2.76	8	0.31	835	32.87	34.0
MR130.50.78	50	1.97	84	3.31	10	0.39	835	32.87	40.0
MR130.60.78	60	2.36	94	3.70	10	0.39	835	32.87	45.0
MR130.75.78	75	2.95	118	4.65	16	0.63	835	32.87	50.0
MR130.80.78	80	3.15	123	4.84	16	0.63	835	32.87	55.0
MR130.90.78	90	3.54	133	5.24	16	0.63	835	32.87	60.0
MR130.100.78	100	3.94	143	5.63	16	0.63	835	32.87	65.0
MR130.120.78	120	4.72	163	6.42	16	0.63	835	32.87	70.0

A10



A11



A13



Our Advantages – Your Convenience

- increase in wear resistence through rollers
- induction hardened rollers (approx. 60 HRc)
- decrease in bending marks
- decrease in press force
- easy and economic exchange of rollers

AD MR60

NEW



98 mm	3.86 in

Adapter for Rolleri Type R1

C45: 560-710 N/mm²

AD MR13

NEW

98 mm	3.86 in

Adapter for Rolleri Type R2/R3

C45: 560-710 N/mm²

AD MR55

NEW



98 mm	3.86 in

Adapter for Rolleri Type RX EHT

C45: 560-710 N/mm²

AD MR35

NEW



98 mm	3.86 in

Adapter for Rolleri Type RX Weinbrenner

C45: 560-710 N/mm²

AD MR12.7

NEW



98 mm	3.86 in

Adapter for Rolleri Type RX LVD

C45: 560-710 N/mm²

MR170.200.80

2000 kN/m max.

NEW

100 mm	3.94 in	19.0 kg

42Cr: 900-1150 N/mm²

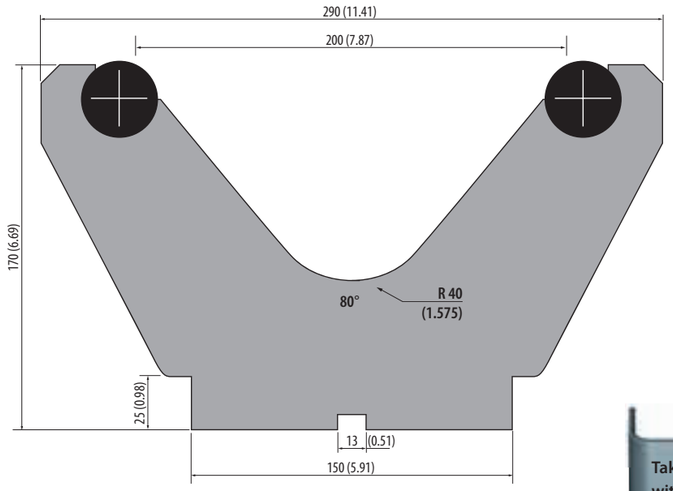

Take advantage of our dies with rollers with means of groove bars/tails to use on other press brake machines.

ROLLERI® PROFESSIONAL BENDING

MR200.250.80

2000 kN/m max.

NEW

100 mm	3.94 in	28.0 kg

42Cr: 900-1150 N/mm²

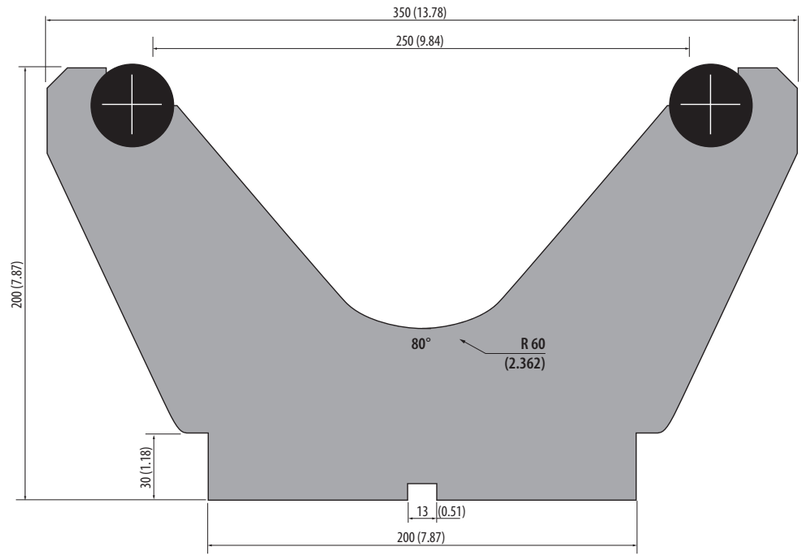

MR250.320.80

2000 kN/m max.

NEW

100 mm	3.94 in	42.0 kg

42Cr: 900-1150 N/mm²

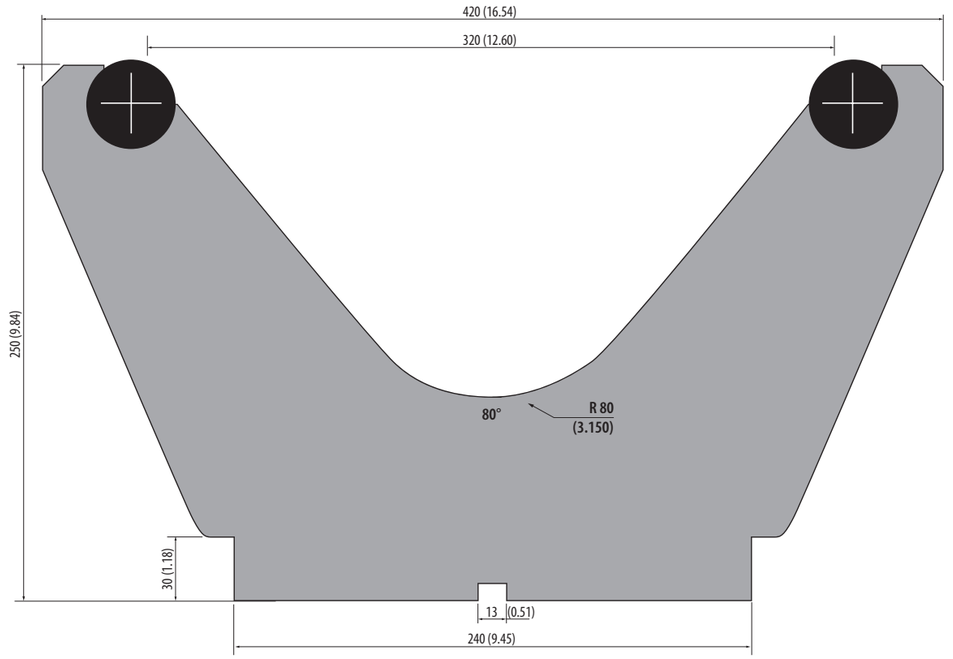

12

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROL6-System

Our Advantages – Your Convenience

- various V-Openings: 40-360 mm (1.57-14.17 in)
- Instructions:
  - secured manually with steering wheel
  - driven by gear motor or
  - CNC-system

While using the manual version, the opening is set in place by a turn of the stearing wheel, or with a gear reduction which is attached to the die.

The automatic version, on the other hand, is operated by a control panel. The standard system does not come with the CNC-Connection for the press brake. It is available upon request at an additional cost.

The base of the ROL6-system is 720 mm (28.35 in) wide, but can also be fitted onto narrow designed tables. There is a adapter available in order to secure the system onto a table with a width of 400 mm (15.75 in). The inserts in the opening radius are exchangeable. The standard version comes with an opening radius of R=10 mm (0.39 in).

Die weight: approx. 1 ton/m

ROL6

42Cr: 900-1150 N/mm²

bending angle	kN/m max.
0°	6000
90°	6000
60°	4000

Rolleri Videos

Application of various dies ROL6:
www.rolleritools.com/videos/rol6

Panelling Tools

Our Advantages – Your Convenience

- in-house construction (no reseller or dealer)
- production according to your specifications
- tracking of every tool possible, with a unique serial number on every article after the quality control check.
- precision grinding (tolerance of +/-0.01 mm)
- exact parallelism
- use of the best materials, guaranteed high resistance and tensile strength

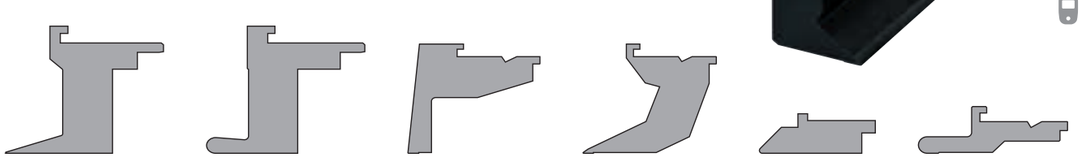

BLACKFIRE

The Unique Coating

Rolleri BLACKFIRE is a particular coating of your tools which defines itself by its increased corrosion resistence and special design.

The chemical treatment permanently solves the problem of oxidation.

The top surface of the metals changes through the phosphate process. It builds phosphate-like crystals, that attach themselves chemically on the substance. This improves the durability of the surface against corrosion.

Your equipment will have a long-term lifecycle left unchanged. The glossy black color of BLACKFIRE is compatible with the new technology and that allows a unique and esthetic look which connects well with the advantages of it.

You can have the BLACKFIRE treatment on all standard tools with a surcharge of 30%.

Please note that the delivery times vary by a BLACKFIRE Treatment.

Our Advantages – Your Convenience

- no corrosion
- better gliding by the exchange of tools
- appealing design
- long-life cycle

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROLLERI®

ROLLERI **SERVICES / MODIFICATIONS**

Our Production Department	246 - 247
Modified Tangs	248 - 249
Special Sectioning	250
Horn Pieces	250
Modifying the V-Opening	250
Radius and Angle Modification	251
Grooves for Dies	251
Grooves and Groove Bars/Tails for Dies	252
Gaps and Windows	253

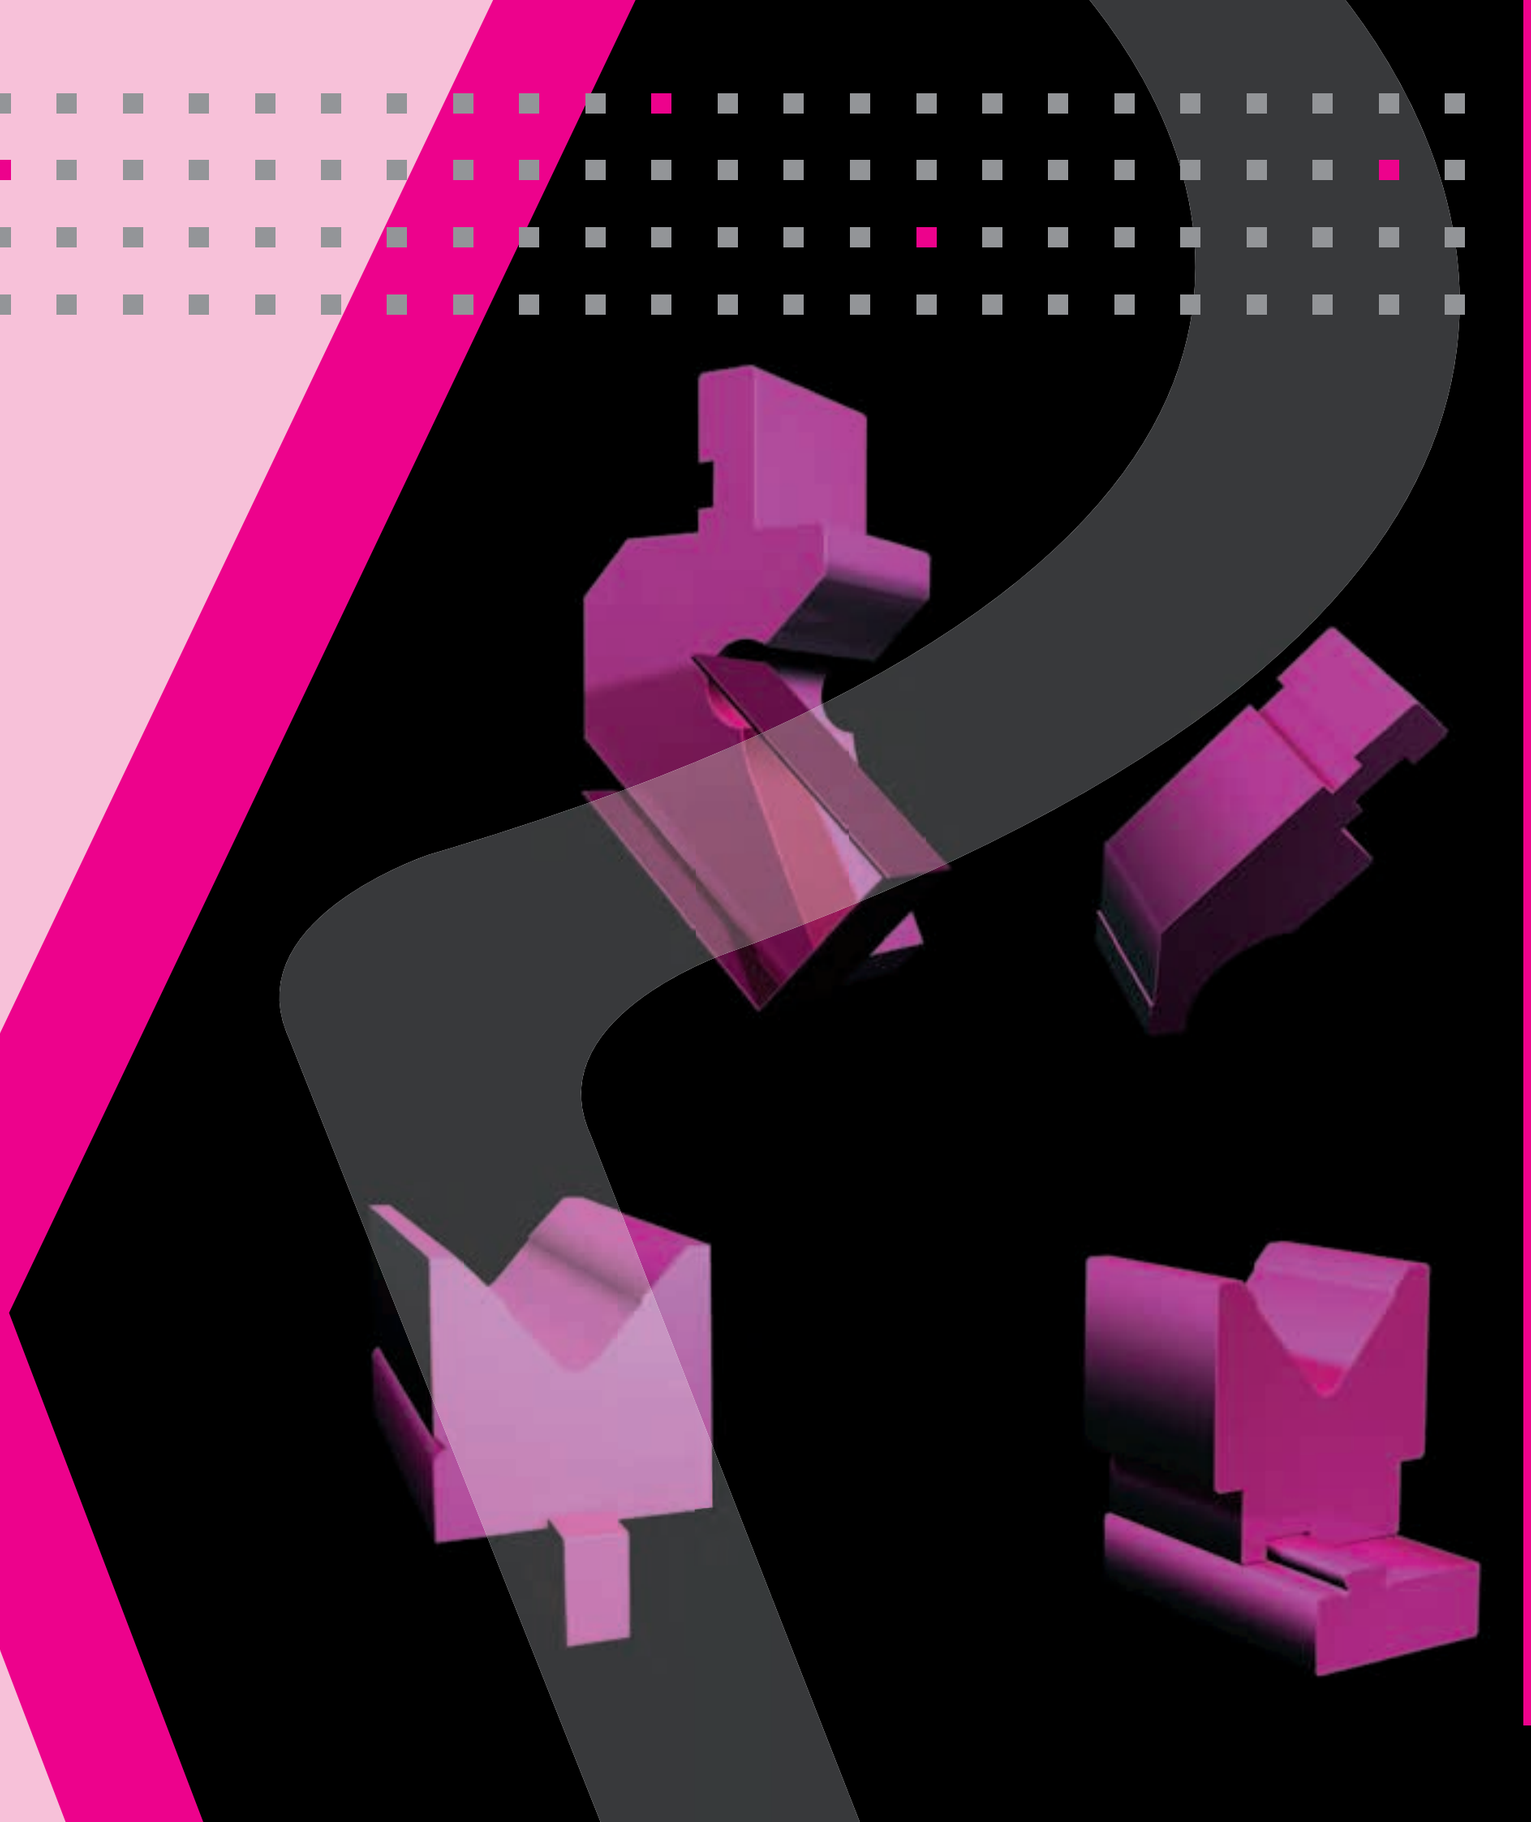

Our Machine Park

Our comprehensive machinery with state-of-the-art technology ensures you the highest quality in tools.

In addition to the manufactured standard and special tools, we perform all modifications individually according to your requirements.

Take advantage the modifications to reduce costs and increase the productivity of your existing tools!

CNC-Milling

With our state-of-the-art milling centers we can do your modification requests fast, precise and with high-quality.

Swivel milling heads with high swivel range allows flexible and universal production.

This is where, grooves, gaps, and openings are created.

CNC-Profile Grinding

Our CNC-Professional grinding machines guarantee, highest precision ground (tolerance of +/-0.01 mm), accurate parallelism and repeatability.

Here you can also retrofit induction hardened and core hardened tool pieces. Radius and angle modifications are percisely grounded after your measurements.

Hardening

The surface areas of the tools are exposed to the highest mechanical stress. Due to the fact that, the whole press force of the press brake machine is focused on small surface of the sheet metal. Therefore the stress is very high on these surfaces. During the bending process of the sheet metal, friction occurs.

For more resistance strength the hardening of the surfaces can be increased. The depth of the hardening must be at least 3 mm to avoid deformations. We use the electromagnetic technique also known as induction hardening to the best quality for your money's worth.

Quality Control and Laser Marking

After the laser marking, tracking of every tool is possible with a unique serial number on every article. Therefore the tracking of your tools is guaranteed and a new productions with the exact same meausrements (angle, radius, hardening, etc.) is possible. This step is happens after quality control.

Individual markings are upon request possible.

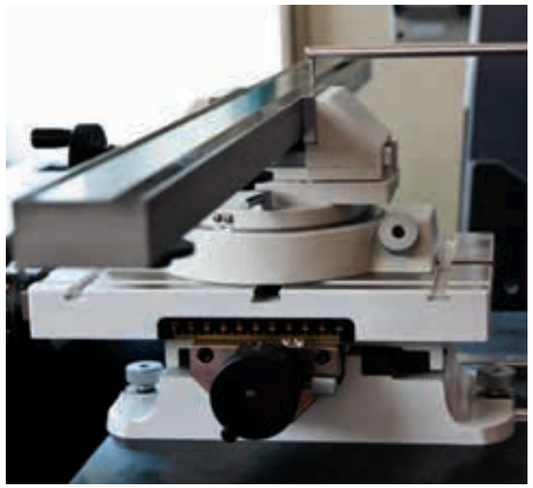

EDM Wire

By using EDM wire, hardened and very tough material can be retrofitted. The process is operated based on a CAD-system which can also process high dimensions such as special shapes.

Modified Tangs

- Rolleri Punches Type R1, R2, and R3 can be used on other press brake machines by modifying the tang.
- Precision ground (Tolerance of +/-0.01 mm)
- exact parallelism
- fast, economic, percise

Standard Rolleri Type R1



Fast delivery on these items guaranteed. Please note that delivery terms vary according to your location.

OT

Modification for:
- for Amada fast clamping system



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A1

Groove in addition to 8.4 x 3.5 mm (0.33 x 0.14 in) groove for:
- pneumatic clamping system



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A6

Groove in addition to 8.4 x 3.5 mm (0.33 x 0.14 in) groove for:
- Rolleri Type R3
- Bystronic-Beyeler Euro
- Safan



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A7

Groove in addition to 8.4 x 3.5 mm (0.33 x 0.14 in) groove and shortened tang for:
- Rolleri Type R3
- Bystronic-Beyeler Euro
- Safan



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A8

Groove Bar/Tail for:
- hydraulic clamping system Gasparini



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A41

older clamping system



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A42

older clamping system



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A43

Groove with steel bar for:
- segmented punches



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

ROLLERI® PROFESSIONAL BENDING

Standard Rolleri Type R2



Modification examples Type R2

production according to your specifications



production according to your specifications



Take advantage of your existing tools with means of modifications.

Standard Rolleri Type R3



Modification examples Type R3

production according to your specifications



production according to your specifications



13

Special Sectioning

- Individual sectioning of your punches and dies
- fast, economic, percise

Pro separation cutting causes a decrease in length of approx. 5 mm

Special Sectioning of Punches

Example of punches
production according to your specifications

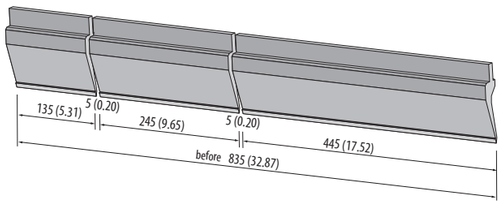

Special Sectioning of Dies

Example of Dies
production according to your specifications

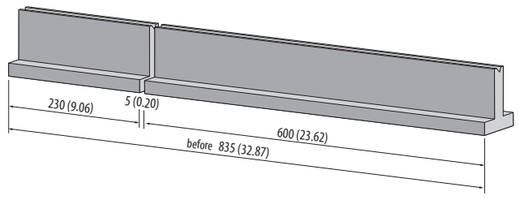

Horn Pieces

- individual horn pieces on punches and dies
- on one or both sides
- fast, economic, percise

Horn Pieces for Punches

Punch example
production according to your specifications

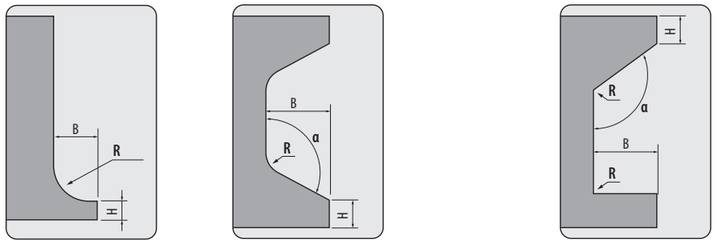

Horn Pieces for Dies

Die example
production according to your specifications

Modifying the V-Opening

- individual modification for dies
- fast, economic, percise

Modifying the V-Opening

Example
production according to your specifications



Give us a call for more information!

ROLLERI® PROFESSIONAL BENDING

Radius and Angle Modifications

- Individual modifications of your punches and dies
- fast, economic, percise

Radius Modifications for Punches

Radii modification Punch example
production according to your specifications



Radius Modifications for Dies

Opening Radius modification die example
production according to your specifications



Angle Modification Punches

Angle modification punch example
production according to your specifications



Angle Modification Dies

Angle modification die example
production according to your specifications



Grooves for Dies

- Milling of grooves for use on other press brake systems
- fast, economic, percise

Delivery within 3 business days. Upon concorrdance even faster!

Mounting example

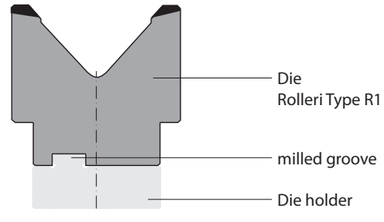

A28

Groove for die holder



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A29

groove production according to your specifications



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

13

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Grooves und Groove Bars/Tails for Dies

- For milling of the groove and the insert of a ground groove bar/tail the exact measurement is needed to use on other press brake systems
- fast, economic, percise

Mounting example



A30

Groove Bars/Tails:
13 x 30 mm (0.51 x 1.18 in) for
- Rolleri Type R2
- Rolleri Type R3



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A31

Groove Bars/Tails:
12 x 29 mm (0.47 x 1.14 in) for
- Rolleri Type RX LVD



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A32

Groove Bars/Tails:
12.7 x 29 mm (0.50 x 1.14 in) for
- Rolleri Type RX LVD



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A44

Groove Bars/Tails:
55 x 55 mm (2.17 x 2.17 in) for
- Rolleri Type RX EHT



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

A45

Groove Bars/Tails:
35 x 55 mm (1.38 x 2.17 in) for
- Rolleri Type RX Weinbrenner



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

AX

individual Groove Bars/Tails
for other systems



835 mm	32.87 in
415 mm	16.34 in
805 mm segmented	31.69 in segmented

Gaps and Windows

- The retrofitting of the tool edges of long parts, short U-profiles and similar
- fast, economic, percise

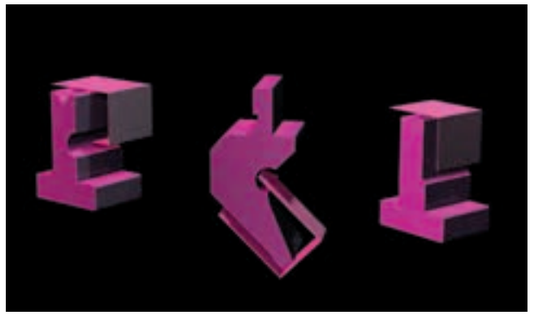

Gaps on Punches

Example Punches
production according to your specifications

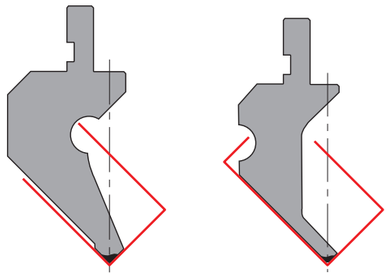

Gaps on Dies

Example Dies
production according to your specifications

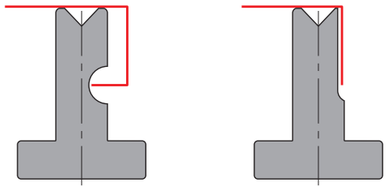

Windows for Punches

Example Punches
production according to your specifications

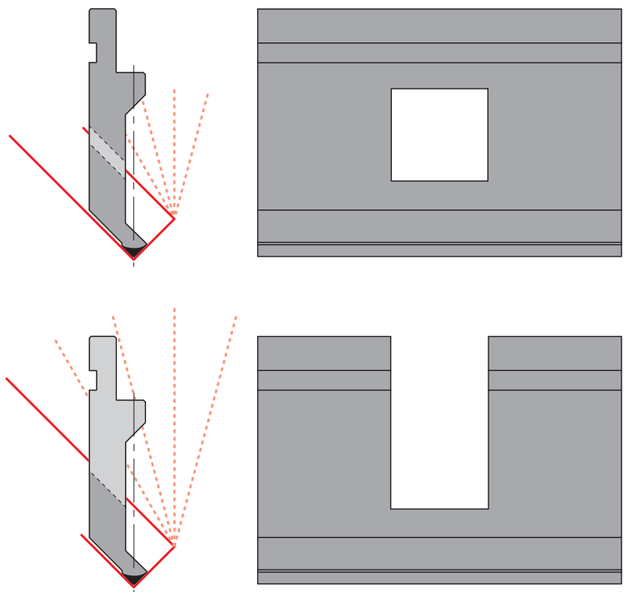

13

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROLLERI®

ROLLERI **SHEAR BLADES** AND **ACCESSORIES**

Tooling Cabinets	256 - 257
Tool Trolley	258
Bending Box	258
Squaring Arms	259
Supporting Arms	260
Back Gauge	260
Shear Blades	260 - 261

Our Advantages – Your Convenience

- Protection against contamination and damage
- Faster access
- Robust construction
- Clear and tidy storage
- Cabinet doors specially designed for lift trucks and truck
- Adjustable height, zinc-plated shelves

Rolleri Videos

Tool storage demonstration at:
www.rolleritools.com/videos/tooling-cabinets

ARM 835-4

for max. tool length = 835 mm (32.87 in)

850 x 1240 x 1050 (W x H x D)
33.46 x 48.82 x 41.34 (W x H x D)

for Tools Rolleri Type R1
approx. 20 m (787.40 in)
Storage capacity

Equipment	
4 Drawers	vertical, on wheels (see CS-1)
16 Shelves	for type R1 with 13 mm (0.51 in) tangs (see shelves UC-13-1)
4 Shelves	for type R1 with 13 mm (0.51 in) tangs (see shelves UL-13-3)
Weight	271.0 kg

ARM 835-5

for max. tool length = 835 mm (32.87 in)

1040 x 1240 x 1050 (W x H x D)
40.94 x 48.82 x 41.34 (W x H x D)

for Tools Rolleri Type R1
approx. 25 m (984.25 in)
Storage capacity

Equipment	
5 Drawers	vertical, on wheels (see CS-1)
20 Shelves	for type R1 with 13 mm (0.51 in) tangs (see shelves UC-13-1)
5 Shelves	for type R1 with 13 mm (0.51 in) tangs (see shelves UL-13-3)
Weight	350.0 kg

ARM 1060-4 / -CV

for max. tool length = 1060 mm (41.73 in)

850 x 1240 x 1360 (W x H x D)
33.46 x 48.82 x 53.54 (W x H x D)

for Tools Rolleri Type R2/R3
approx. 26 m / 39 m (1023.62 in / 1535.43 in) Storage capacity

Equipment **ARM 1060-4**	
4 Drawers	vertical, on wheels (see CS-2)
16 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UC-20-2)
4 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UL-20-4)
Weight	340.0 kg

Equipment **ARM 1060-4-CV**	
4 Drawers	vertical, on wheels (see CS-2), incl. 2 Drawers with separators (see CV)
20 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UC-20-1)
10 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UL-20-4)
Weight	351.0 kg

ARM 1060-5 / -CV

for max. tool length = 1060 mm (41.73 in)

1040 x 1240 x 1360 (W x H x D)
40.94 x 48.82 x 53.54 (W x H x D)

for Tools Rolleri Type R2/R3
approx. 32.5 m / 52 m (1279.52 in / 2047.24 in) Storage capacity

Equipment **ARM 1060-5**	
5 Drawers	vertical, on wheels (see CS-2)
20 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UC-20-2)
5 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UL-20-4)
Weight	400.0 kg

Equipment **ARM 1060-5-CV**	
5 Drawers	vertical, on wheels (see CS-2), incl. 3 Drawers with separators (see CV)
30 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UC-20-1)
10 Shelves	for type R2/R3 with 20 mm (0.79 in) tangs (see shelves UL-20-4)
Weight	490.0 kg

ROLLERI® PROFESSIONAL BENDING

ARM 1060-4-T / -CV

for max. tool length = 1060 mm (41.73 in)

850 x 1240 x 1360 (W x H x D)
33.46 x 48.82 x 53.54 (W x H x D)

for tools Rolleri Type R2/R3
approx. 20.8 m / 31.2 m (818.89 in / 1228.34 in) Storage capacity

Equipment **ARM 1060-4-T**	
4 Drawers	vertical, on wheels (see CS-2)
8 Shelves	for type R2/R3 with 13 mm (0.51 in) tangs (see shelves UL-13-4)
8 Shelves	for type R2/R3 (see shelves UT-4)
Weight	383.0 kg

Equipment **ARM 1060-4-T-CV**	
4 Drawers	vertical, on wheels (see CS-2), incl. 2 Drawers with separators (see CV)
16 Shelves	for type R2/R3 with 13 mm (0.51 in) tangs (see shelves UC-13-1)
8 Shelves	for type R2/R3 (see shelves UT-4)
Weight	360.0 kg

ARM 1060-5-T / -CV

for max. tool length = 1060 mm (41.73 in)

1040 x 1240 x 1360 (W x H x D)
40.94 x 48.82 x 53.54 (W x H x D)

for tools Rolleri Type R2/R3
approx. 26 m / 41.6 m (1023.62 in / 1637.79 in) Storage capacity

Equipment **ARM 1060-5-T**	
5 Drawers	vertical, on wheels (see CS-2)
10 Shelves	for type R2/R3 with 13 mm (0.51 in) tangs (see shelves UL-13-4)
10 Shelves	for type R2/R3 (see shelves UT-4)
Weight	447.0 kg

Equipment **ARM 1060-5-T-CV**	
5 Drawers	vertical, on wheels (see CS-2), incl. 3 Drawers with separators (see CV)
24 Shelves	for type R2/R3 with 13 mm (0.51 in) tangs (see shelves UC-13-1)
8 Shelves	for type R2/R3 (see shelves UT-4)
Weight	500.0 kg

UC-Shelves



Model	L mm (in)	A mm (in)	B mm (in)	Weight
UC-13-1	125 (4.92)	13 (0.51)	76 (2.99)	0.5 kg
UC-13-2	250 (9.84)	13 (0.51)	232 (9.13)	1.0 kg
UC-20-1	125 (4.92)	20 (0.79)	76 (2.99)	0.5 kg
UC-20-2	250 (9.84)	20 (0.79)	232 (9.13)	1.0 kg

2 pieces

UL-Shelves



Model	L mm (in)	B mm (in)	Weight
UL-13-1	270 (10.63)	13 (0.51)	1.2 kg
UL-13-2	580 (22.83)	13 (0.51)	2.5 kg
UL-13-3	1050 (41.34)	13 (0.51)	4.6 kg
UL-13-4	1360 (53.54)	13 (0.51)	6.0 kg
UL-20-1	270 (10.63)	20 (0.79)	1.4 kg
UL-20-2	580 (22.83)	20 (0.79)	3.2 kg
UL-20-3	1050 (41.34)	20 (0.79)	5.8 kg
UL-20-4	1360 (53.54)	20 (0.79)	7.5 kg

UT-Shelves

Model	L (mm)	L (in)	Weight
UT-1	270	10.63	1.4 kg
UT-2	580	22.83	3.2 kg
UT-3	1050	41.34	5.8 kg
UT-4	1360	53.54	7.5 kg

enough room for punches with safety pins

UV-Shelves

Model	L (mm)	L (in)	Weight
UV-1	270	10.63	1.0 kg
UV-2	580	22.83	2.0 kg
UV-3	1050	41.34	4.3 kg
UV-4	1360	53.54	5.5 kg

CS-Drawers

Model	T mm (in)	L mm (in)	Weight
CS-1	1050 (41.34)	856 (33.70)	22.0 kg
CS-2	1360 (53.54)	1166 (45.91)	25.0 kg

CV-Dividers



Model	T mm (in)	A mm (in)	B mm (in)	Weight
CV-1	1050 (41.34)	580 (22.83)	270 (10.63)	7.0 kg
CV-2	1360 (53.54)	580 (22.83)	580 (22.83)	7.0 kg

on stock Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Tool Trolley

■ Our Advantages – Your Convenience

- faster access
- robust construction
- clear and tidy storage
- visibility of tools

Tool Trolleys

Model	Content	Tool System	Weight
A Trolley	30 Shelves	**for R1 tools**	108.0 kg
T Trolley	21 Shelves	**for R2 tools**	175.0 kg
B Trolley	21 Shelves	**for R3 tools**	135.0 kg

Rolleri Videos

Secure storage and mobility:
www.rolleritools.com/videos/tool-trolley

Bending Box

Bending Box

per piece | 1.6 kg

Squaring Arms

■ Our Advantages – Your Convenience

- easy and fast securing
- percise and flexible adjustability
- adjustable angle stop
- mountable on all dies
- ideal for long, and thin sheet metals

Rolleri Videos

Magnetic Squaring Arms :
www.rolleritools.com/videos/squaring-arms

MSA – magnetic

MSA.D	**(right)**	per piece	1.4 kg
MSA.S	**(left)**	per piece	1.4 kg

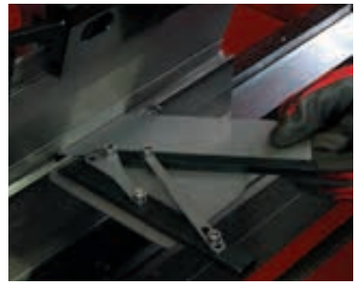

AS

per piece | 3.5 kg

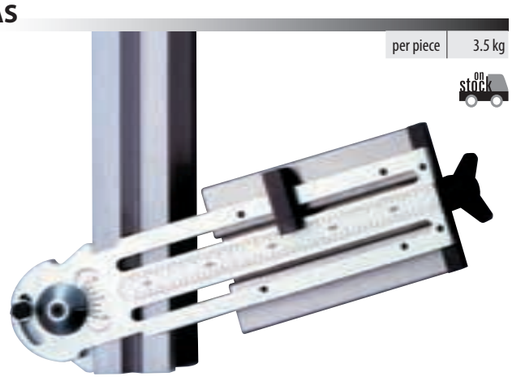

Give us a call for more information!

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

ROLLERI ACCESSORIES

Supporting Arms and Back Gauge

RIF-Supporting Arm

Model	Length mm (in)		Weight
RIF500	500	(19.68)	7.0 kg
RIF1000	1000	(39.37)	12.0 kg
RIF1500	1500	(59.05)	17.0 kg

- for secure support for high volume sheet metals
- greater surface guarantees a trouble-free support for sheet metals
- easy handling

RP-Back Gauge

Model	Weight
RP500A	8.0 kg
RP500B	8.0 kg

- ensures for the correct posistioning of tools on the press brake and secures herewith the exact border distance.
- fast and exact repeatability
- easy handling

AS FIX

per piece	3.0 kg

Shear Blades

We manufacture in our company over more than 20 years shear blades.

High-quality steels are finished according to your specifications.

Please provide us with the following information:

- What material are you cutting with your machines: Steel, Stainless Steel, Aluminium, etc.
- How thick is the material in diameter?
- How often to you use your cutting machine? (per hour, day, week)
- How many upper and lower shear blades are needed?

ROLLERI SHEAR BLADES

Shear Blades

ROLLERI® PROFESSIONAL BENDING

Our Advantages – Your Convenience

- own production
- custom production
- depending on the cutting material
- high quality Materials
- 4-, 2- or 1-sharp
- with threaded holes or bilateral reduction
- hardened according to your specifications and request

available sizes mm (in)				
50 x 10 (1.97 x 0.39)	55 x 12 (2.17 x 0.47)	60 x 12 (2.36 x 0.47)	65 x 13 (2.56 x 0.51)	70 x 13 (2.76 x 0.51)
50 x 11 (1.97 x 0.43)	55 x 13 (2.17 x 0.51)	60 x 13 (2.36 x 0.51)	65 x 14 (2.56 x 0.55)	70 x 14 (2.76 x 0.55)
50 x 12 (1.97 x 0.47)	55 x 14 (2.17 x 0.55)	60 x 14 (2.36 x 0.55)	65 x 15 (2.56 x 0.59)	70 x 15 (2.76 x 0.59)
50 x 13 (1.97 x 0.51)	55 x 15 (2.17 x 0.59)	60 x 15 (2.36 x 0.59)	65 x 16 (2.56 x 0.63)	70 x 16 (2.76 x 0.63)
50 x 14 (1.97 x 0.55)	55 x 16 (2.17 x 0.63)	60 x 16 (2.36 x 0.63)	65 x 17 (2.56 x 0.67)	70 x 17 (2.76 x 0.67)
50 x 15 (1.97 x 0.59)	55 x 17 (2.17 x 0.67)	60 x 17 (2.36 x 0.67)	65 x 18 (2.56 x 0.71)	70 x 18 (2.76 x 0.71)
	55 x 18 (2.17 x 0.71)	60 x 18 (2.36 x 0.71)	65 x 19 (2.56 x 0.75)	70 x 19 (2.76 x 0.75)
	55 x 19 (2.17 x 0.75)	60 x 19 (2.36 x 0.75)	65 x 20 (2.56 x 0.79)	70 x 20 (2.76 x 0.79)
	55 x 20 (2.17 x 0.79)	60 x 20 (2.36 x 0.79)		

available sizes mm (in)				
75 x 15 (2.95 x 0.59)	80 x 16 (3.15 x 0.63)	85 x 18 (3.35 x 0.71)	90 x 20 (3.54 x 0.79)	100 x 20 (3.94 x 0.79)
75 x 16 (2.95 x 0.63)	80 x 18 (3.15 x 0.71)	85 x 19 (3.35 x 0.75)	90 x 21 (3.54 x 0.83)	100 x 22 (3.94 x 0.87)
75 x 17 (2.95 x 0.67)	80 x 19 (3.15 x 0.75)	85 x 20 (3.35 x 0.79)	90 x 22 (3.54 x 0.87)	100 x 25 (3.94 x 0.98)
75 x 18 (2.95 x 0.71)	80 x 20 (3.15 x 0.79)	85 x 21 (3.35 x 0.83)	90 x 23 (3.54 x 0.91)	100 x 26 (3.94 x 1.02)
75 x 19 (2.95 x 0.75)	80 x 21 (3.15 x 0.83)	85 x 22 (3.35 x 0.87)	90 x 24 (3.54 x 0.94)	100 x 27 (3.94 x 1.06)
75 x 20 (2.95 x 0.79)	80 x 22 (3.15 x 0.87)	85 x 23 (3.35 x 0.91)	90 x 25 (3.54 x 0.98)	100 x 28 (3.94 x 1.10)
75 x 21 (2.95 x 0.83)	80 x 23 (3.15 x 0.91)	85 x 24 (3.35 x 0.94)		100 x 29 (3.94 x 1.14)
75 x 22 (2.95 x 0.87)	80 x 24 (3.15 x 0.94)	85 x 25 (3.35 x 0.98)		100 x 30 (3.94 x 1.18)
75 x 23 (2.95 x 0.91)	80 x 25 (3.15 x 0.98)			
75 x 24 (2.95 x 0.94)				
75 x 25 (2.95 x 0.98)				

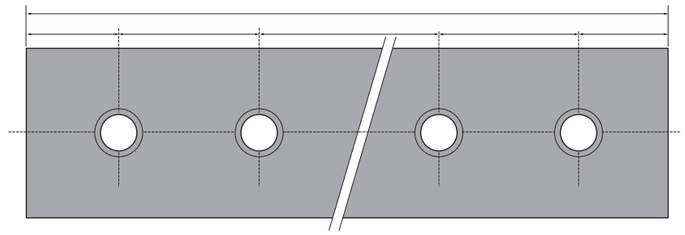

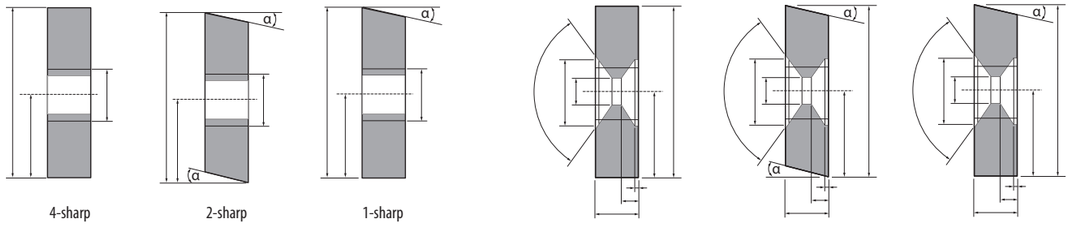

4-sharp 2-sharp 1-sharp

Article on stock

Please ask for delivery time!

1 kg = 2.20 Pounds (lb) = 35.27 Ounzes (oz)
100 mm = 3.94 Inch (in) = 0.33 Feet (ft)

Articles on stock – Please note that delivery time depends on your location.

Press Force Table

The press force table is based on the press force caliper and is very useful to those who deal with sheet metal profiles. It can assist you from the projection of profiles, to technical construction, to the buying of tools, and to the finished profile from the press brake machine.

In the first left column the thickness of the sheet metal is noted as (S). In the three first lines you can find the die width (V), the minimum boarder (B), and the ideal inner profile radius (Ri).

By crossing the thickness with the die width, you will find the necessary press force per meter. Furthermore, depicted are the span of 5 different die widths. The correction factors are found below in the table.



S = Thickness
V = Die Width
B = Min. Boarder
Ri = Inner Profile Radius

420 N/mm²																				
S (mm)	4	5	6	8	10	12	16	20	25	32	40	50	63	80	100	125	160	200	250	V
	3.0	3.5	4.0	5.5	6.5	8.0	10.5	13.0	16.5	21.0	26.0	32.5	41.0	52.0	65.0	81.5	104.0	130.0	163.0	B
	0,5	0,7	0,8	1,0	1,3	1,5	2,0	2,5	3,2	4,4	5,0	6,5	8,0	10,0	12,0	15,0	20,0	25,0	37,0	Ri
0.6	60	50	30	20																
0.8	120	90	70	50	40															
1.0		150	110	80	60	50														
1.2			180	120	90	70	50													
1.5				210	150	120	80	60												
2.0					300	230	160	120	90											
2.5						390	270	200	140	110										
3.0							430	310	230	160	120									
4.0								600	440	320	230	180								F kN/m
5.0									760	540	390	290	220							
6.0										850	620	450	330	250						
8.0											1210	880	700	460	350					
10.0												1510	1090	790	580	440				
12.0													1730	1240	910	660	500			
15.0		INOX – stainless steel R 700 N/mm² Ton x 1.7												2130	1550	1130	810	620		
20.0		AL – aluminium R 200 N/mm² Ton x 0.5													3020	2200	1580	1150	890	
25.0		(R = tensile strength)														3780	2690	1970	1440	

30°	B x 1.6	R=200 N/mm²	r x 0.8	Al
60°	B x 1.1			
90°	B x 1.0	R=420 N/mm²	r x 1.0	Fe
120°	B x 0.9			
150°	B x 0.7	R=700 N/mm²	r x 1.4	INOX

www.rolleritools.com

Visit us on our website and take advantage of:

- drawings 1:1 format available
- extra information and tips
- helpful videos and application examples
- easy website browsing

Copyright: The use of Rolleri Publications and national adoptions of Rolleri Publications is subject to the user's acceptance of Rolleri's terms of use and conditions of copyright for Rolleri publications, as set out below.

All Rolleri Publications and national adoptions thereof are protected by copyright. Therefore and unless otherwise specified, no part of an Rolleri Publication or a national adoption thereof may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, microfilm, and scanning, without permission in writing from the publisher.

www.rolleritools.com

ROLLERI®
PROFESSIONAL
BENDING

Rolleri S.p.A.
Via Artigiani Cabina · 29020 Vigolzone (PC) – Italia
Tel. +39 05 23 87 09 05
Fax +39 05 23 87 90 30
E-Mail sales@rolleri.it
Web www.rolleri.it

www.jumag.it